

Draw-out circuit breaker with slide-in module frame 3-pole, Size 1, IEC In=630 A to 690 V, 50/60 Hz AC Icu=55 kA at 500 V with connecting flange Overcurrent release ETU 45 LSIN protection adjustable 0.4-1 in with cubicle bus Opt.: Comm. /measuring func./ground fault/ ZSS Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 4NO+4NC C22= Ready indicator K07= Tripped signaling contact, 1 CO not possible with option F02 R15= Position signaling switch, withdrawable part 3 changeover contacts R21= Shutter 2-part can be locked with padlock

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1106-2EB68-4GA4-Z C22+K07+R15+R21>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1106-2EB68-4GA4-Z C22+K07+R15+R21>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WL1106-2EB68-4GA4-Z C22+K07+R15+R21](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1106-2EB68-4GA4-Z C22+K07+R15+R21)


#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>

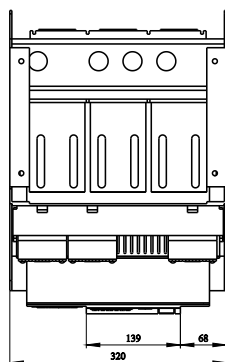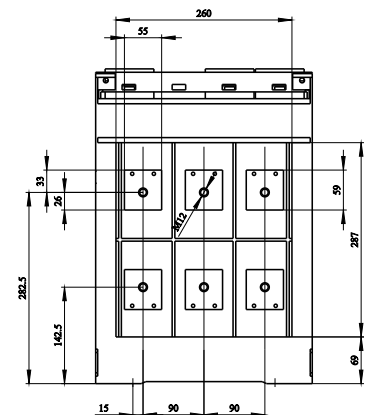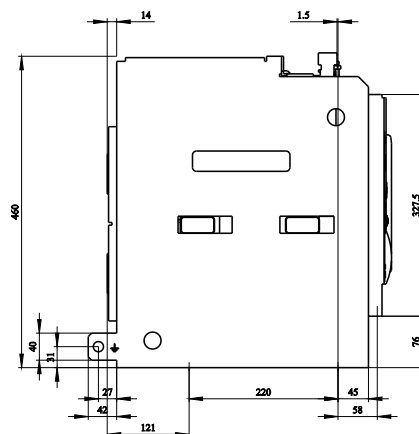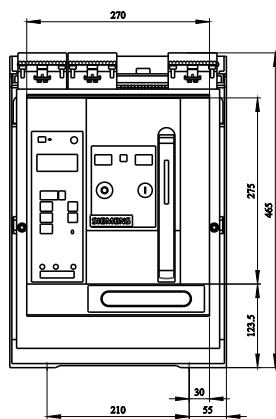

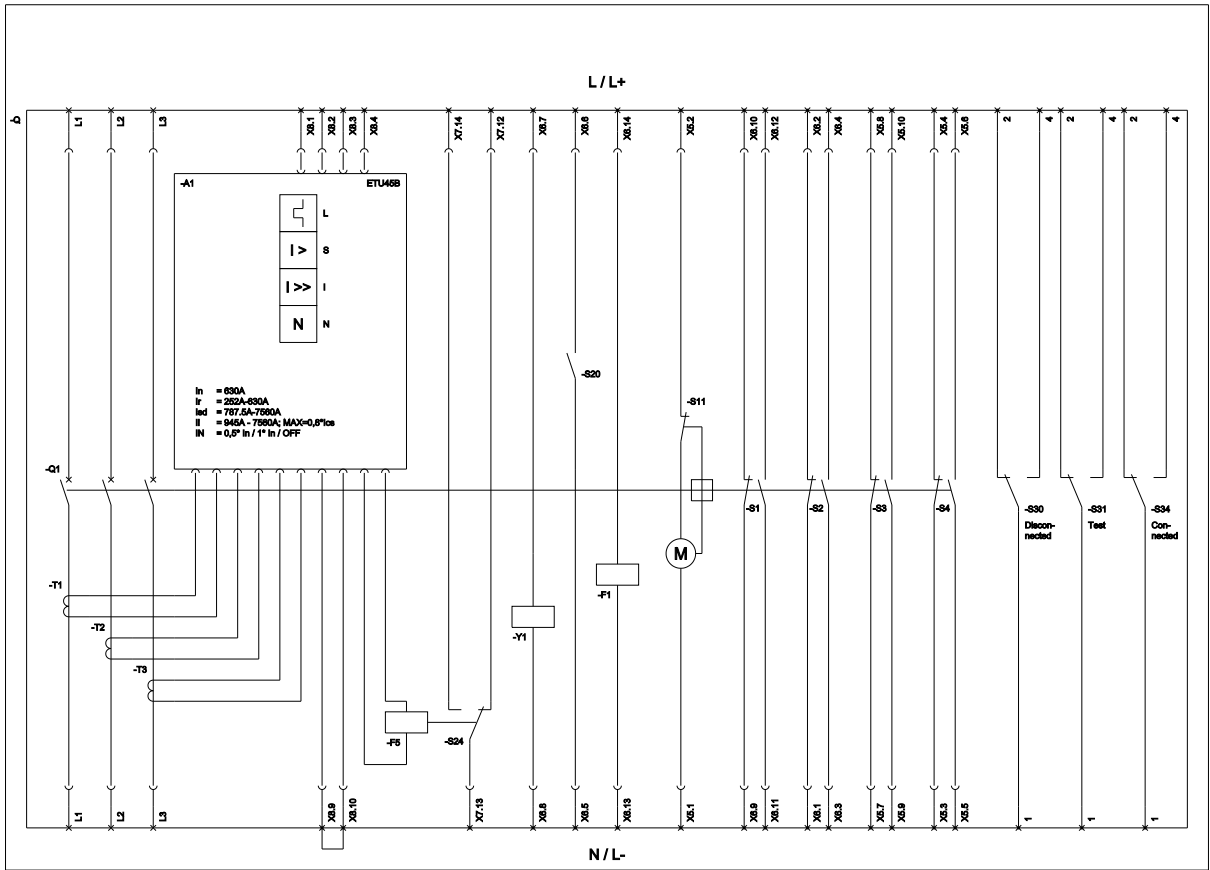

L (Long Time Delay / Durchschaltzeit); S (Short Time Delay / Kurzschlussschutz, Inantriebzeit); I (Interlocking / Kurzschlussschutz, voranfragen); N (Neutral Protection / Neutralleiterwache);  
 S11 (Manual motor shutdown switch, if typing is required / Manuelle Motorschaltvorrichtung, wenn Feder gespannt); F1 (1st auxiliary release / Erste Hilfskontakt); F5 (Magnet for trip unit / Anlaufmagnet); S1 - S8 (Auxiliary switch / Hilfskontakt);  
 S20 (Ready to close signalling switch / Bereitschaftsschaltkontakt), S24 (1st stop signalling switch K07 (Reset position) / Erste Anlaufkontakt K07 (Reset Position)); Y1 (Chasing coil / Einschaltmagnet);

last modified:

11/7/2023

