

Fixed-mounted circuit breaker 3-pole, Size 1, IEC In=1000 A up to 690 V, 50/60 Hz AC Icu=66 kA at 500 V Rear horizontal connection Overcurrent release ETU 25 LSI protection adjustable 0.4-1 in Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor With 2nd auxiliary release "R", F3 Undervoltage, instant. 208-240 V AC, 220-250 V DC 2NO+2NC C22= Ready indicator C26= Auxiliary switching function 1st auxiliary release not possible with option F02 K07= Tripped signaling contact, 1 CO not possible with option F02

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1110-3CB62-4GN2-Z C22+C26+K07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1110-3CB62-4GN2-Z C22+C26+K07>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1110-3CB62-4GN2-Z C22+C26+K07


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

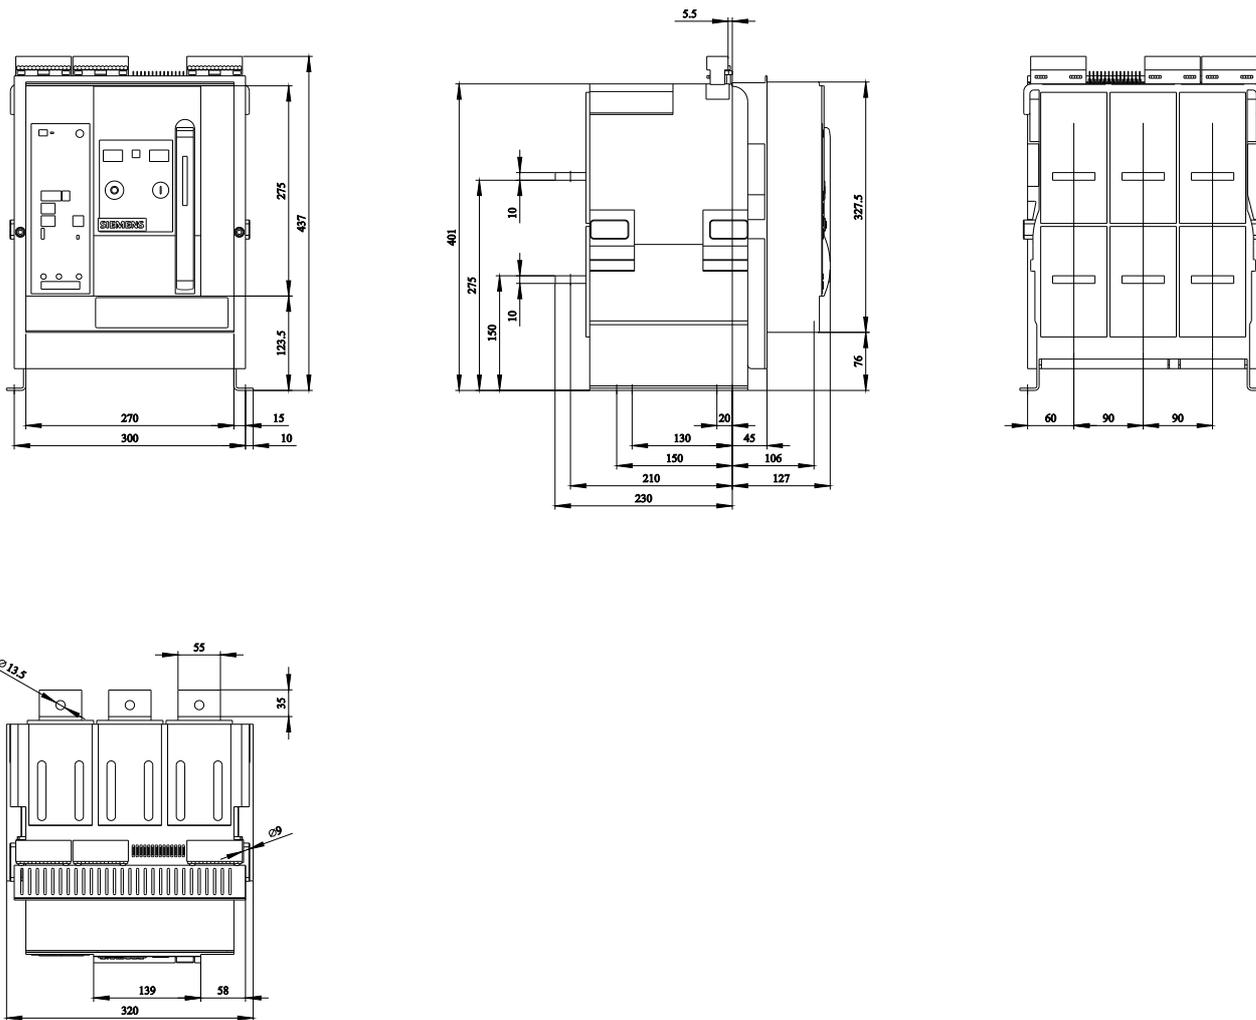

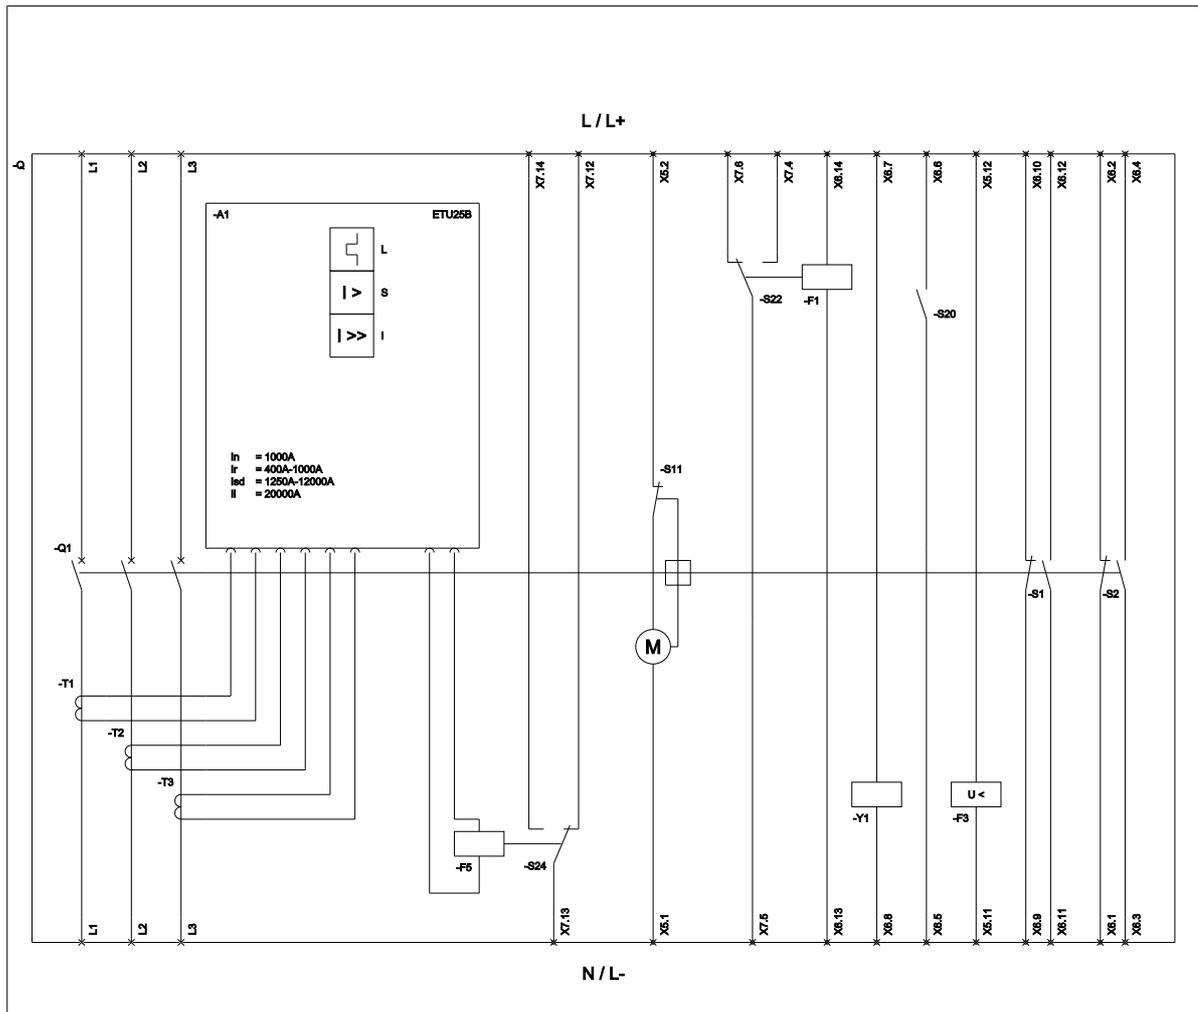

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlusschutz, kurzzeitverzöger); I (Instantaneous / Kurzschlusschutz, unverzögert);
 S11 (Internal motor shutdown switch, if spring is tensioned / Interne Motorschaltstellschalter, wenn Feder gespannt); F1 (1st auxiliary release / Erster Hilfsauslöser);
 S22 (Signalling contact at the 1st auxiliary release / Mitlöschkontakt am ersten Hilfsauslöser); F3 (Undervoltage release / Unterspannungsauslöser); F5 (Magnetlock for trip unit / Antriebsmagnet); S1 - S8 (Auxiliary switch / Hilfschalter);
 S20 (Ready to close signalling switch / Einschaltbereitschalterschalterschalter); S24 (1st trip signalling switch K07 (Reset position) / Erster Anspülstromschalterschalter K07 (Reset Position)); Y1 (Closing coil / Einschaltmagnet);

last modified:

3/12/2024

