

Data sheet

3WL1220-2FG38-4GN4-Z C01+C22+F12+R15+R21

withdrawable circuit breaker with guide frame 3-pole, size II, IEC In=2000A to 690V, AC50/60Hz Icu=66kA at 500V w. connection flange Overcurrent release ETU 45 LSING protection adjustable 0.4-1 in with display and cubicle bus with ground fault protection Opt.: Comm./measuring func./ZSS Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor With 2nd auxiliary release "R", F3 Undervoltage, instant, 208-240 V AC, 220-250 V DC 4NO+4NC C01= mechanical switching cycle counter C22= Ready indicator F12= COM16 Modbus module with breaker status sensor R15= Position signaling switch, withdrawable part 3 changeover contacts R21= Shutter 2-part can be locked with padlock

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1220-2FG38-4GN4-Z C01+C22+F12+R15+R21>

[Service&Support \(Manuals, Certificates, Characteristics, FAQs,...\)](#)

https://support.industry.siemens.com/cs/ww/en/ps/3WL1220-2FG38-4GN4-Z_C01+C22+F12+R15+R21

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1220-2FG38-4GN4-Z C01+C22+F12+R15+R21

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

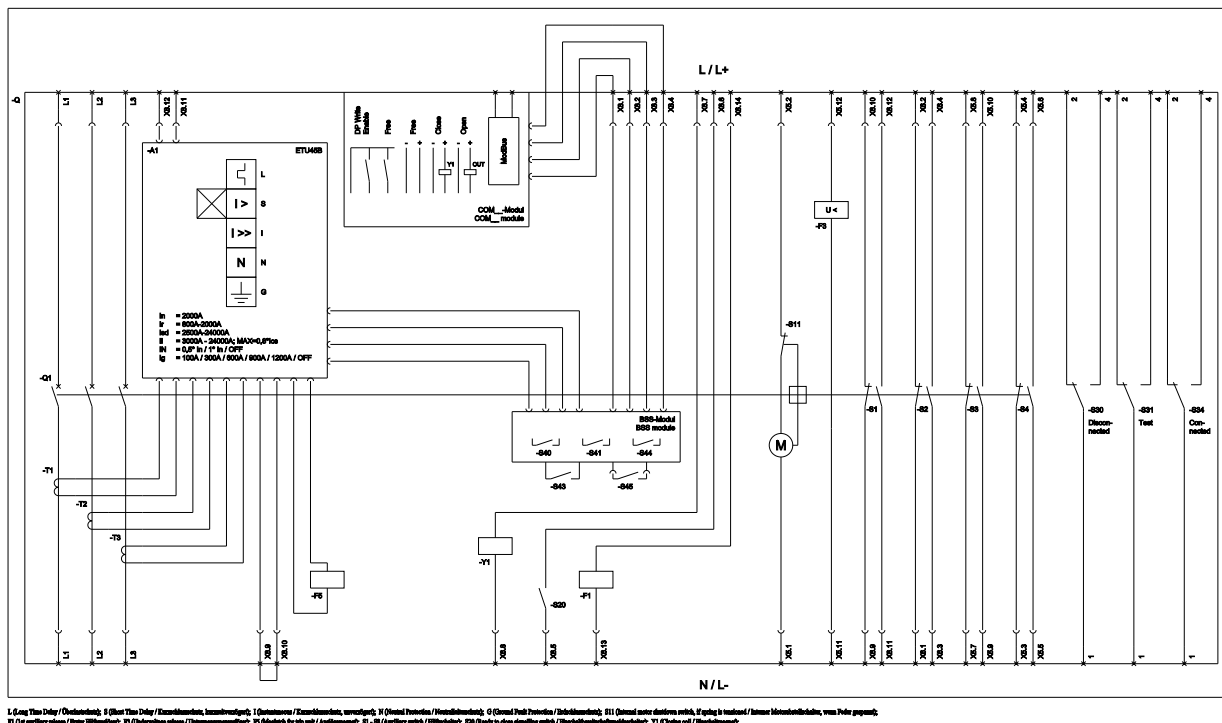

last modified:

3/14/2024

