

withdrawable circuit breaker with guide frame 4-pole, size II, IEC In=3200A to 690V, AC50/60Hz Icu=66kA at 500V rear connection horizontal Overcurrent release ETU 45 LSIN protection adjustable 0.4-1 in with cubicle bus Opt.: Comm. /measuring func./ground fault/ ZSS Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 4NO+4NC C01= Mechanical switching cycle counter K07= Tripped signaling contact, 1 CO not possible with option F02

### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1232-2EB46-4GA4-Z C01+K07>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1232-2EB46-4GA4-Z C01+K07>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3WL1232-2EB46-4GA4-Z C01+K07](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1232-2EB46-4GA4-Z C01+K07)


#### CAX-Online-Generator

<http://www.siemens.com/cax>

#### Tender specifications

<http://www.siemens.com/specifications>



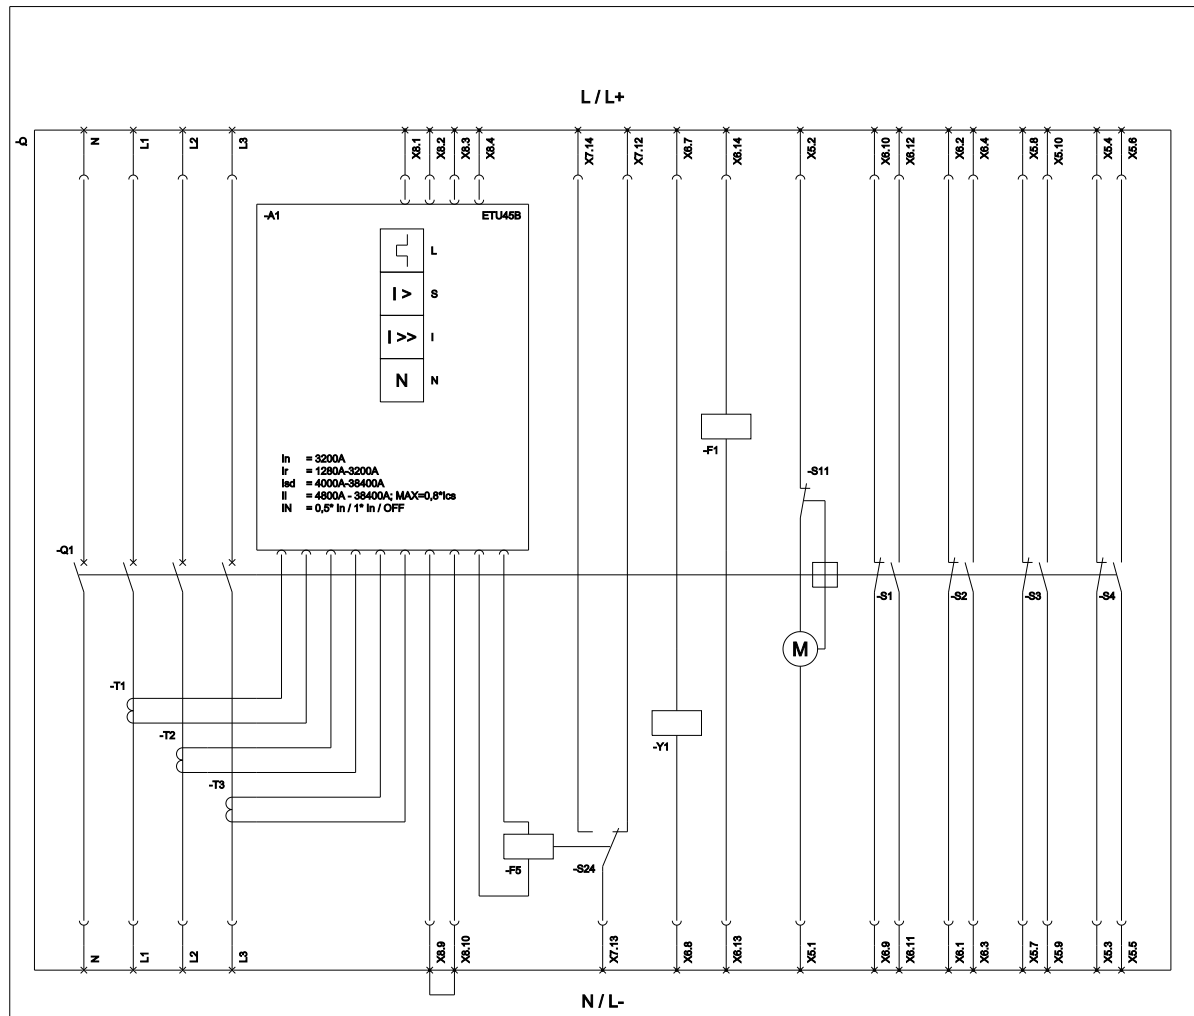

L (Long Time Delay / Überlastschutz); S (Short Time Delay / Kurzschlussschutz, kurzzeitsensitiver); I (Instantaneous / Kurzschlussschutz, unverszögert); N (Neutral Protection / Neutrallebensschutz);  
 S11 (Internal motor shutdown switch, if spring is tensioned / Interner Motorschalterschalter, wenn Feder gespannt); F1 (Lat auxiliary release / Bremsen Hilfskontakt); F5 (Magnet for trip unit / Auslösemagnet);  
 S1 - S8 (Auxiliary switch / Hilfschalter); S24 (Lat trip signalling switch K07 (Reset position) / Bremsen Auslösekontakt K07 (Reset position)); Y1 (Closing coil / Einschaltemagnet);

last modified:

10/11/2023

