



Smart light grids SAS

SAS4-S028N3PS1T00



Model Name > [SAS4-S028N3PS1T00](#)
Part No. > [1207707](#)



At a glance

- Variable detection lengths from 120 mm up to 600 mm (in 160 mm increments)
- Set parameters via teach-in with no PC
- Simple teach-in setup
- Maximum range 4 m
- Response time 18 ms
- 25 mm resolution with 40 mm beam separation possible
- Highly immune to sunlight up to 150,000 lx
- Small blind zone < 11 mm

Your benefits

- Small, slim and sleek design enables easy integration into applications
- Capacitive teach-in button and LEDs make commissioning easier for complex solutions
- Slim and flat models offer flexible mounting options and optimize space while reducing damage
- Customized preset configurations or set parameters via one-touch teach-in with no PC
- Optical synchronization eliminates the need to lay cables, saving time
- Auto-teach and auto-muting enable Plug & Play. And, an alignment aid and “Click & Go” provide faster installation.



Features

Technology:	Sender/receiver
Task:	Switching light grid
Minimum detectable object (MDO):	Parallel beam: ≥45 mm
Beam separation:	40 mm
Optical light exit:	Slim

Number of beams:	8
Detection height:	280 mm
Cross beam/parallel beam:	Parallel beam active
Output 1:	Output 1 active, if light beam interrupted
Automatic teach:	Automatic teach inactive
Alignment aid:	Without alignment aid
Muting function:	Muting function inactive
Configuration:	Teach button with configuration software

Performance

Maximum range:	4 m ¹⁾
Minimum range:	Parallel beam: ≥ 0 mm ²⁾
Response time:	Parallel beam: ≥ 19 ms ³⁾
Working range:	3 m

¹⁾ No reserve for environmental issue and deterioration of the diode ²⁾ Aperture $\pm 10^\circ$ ³⁾ With resistive load

Interfaces

Output type:	1 x NPN
Inputs:	Teach input
Connection type:	Short cable with connector M8, 4-pin

Mechanics/electronics

Wave length:	IR 950 nm
Supply voltage Vs:	DC 24 V ... , ± 20 % ¹⁾
Power consumption sender:	88 mA ²⁾
Power consumption receiver::	70 mA ^{3) 4)}
Ripple:	< 5 Vpp
Output current I _{max} ..:	100 mA
Output load capacitive:	100 nF
Output load inductive:	1 H
Initialization time:	1 s
Dimensions (W x H x D):	25 mm x 352.4 mm x 8 mm
Housing material:	PMMA
Indication:	LED
Synchronization:	Optical
Enclosure rating:	IP 65
Circuit protection:	Output Q short-circuit protected, Interference suppression, VS connections reverse-polarity protected
Weight:	40 g
Power consumption:	88 mA ⁵⁾
Aluminum stabilizer:	Without stabilizer
Switching frequency:	500 kHz

¹⁾ Limit values ^{2) 3) 4) 5)} Without load

Ambient data

Protection class:	III
EMC:	EN 60947-5-2
Ambient temperature:	Operation: -25 ... 55 °C, Storage: -25 ... 70 °C
Ambient light safety:	Direct: $\geq 100,000$ lx, Indirect: $\geq 150,000$ lx ¹⁾
Vibration resistance:	5 g, 10 Hz ... 55 Hz (IEC 68-2-6)

10 g/DIN EN 60068-2-29/16 ms

Dimensional drawing

Receiver

Sender

Receiver Dimensions:

- Total Length: $L = DH + RM + .33 \text{ (1.30)}$
- Top Section Width: 25 (0.98)
- Middle Section Width: 8.5 (0.33)
- Bottom Section Width: 8.2 (0.32)
- Side View Total Length: 44.5 (1.75)
- Side View Middle Section Width: 8.6 (0.34)
- Side View Bottom Section Width: 1.2 (0.05)
- Hole Diameter: $\varnothing 9 \text{ (0.35)}$
- Thread: M8

Sender Dimensions:

- Top Section Width: 25 (0.98)
- Middle Section Width: 8.5 (0.33)
- Bottom Section Width: 8.2 (0.32)
- Side View Total Length: 100 (3.94)

Labels:


- ① Top section of Receiver
- ② Middle section of Receiver
- ③ Bottom section of Receiver
- ④ Hole in Receiver
- ⑤ Threaded end of Receiver
- ⑥ Middle section of Sender
- ⑦ Bottom section of Sender

- 8/27/2013 10:14:05 AM


Adjustments




Anschlussart und -schema

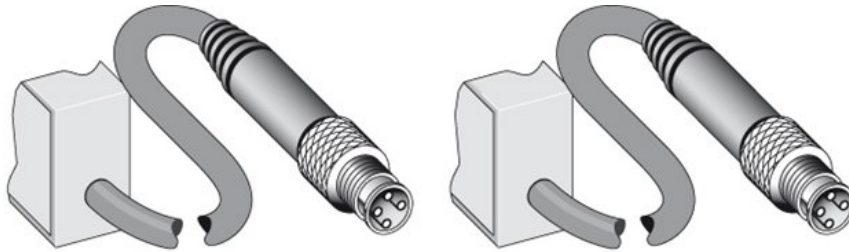

Sender



Receiver



Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com