

TSXREY200

bus X remote rackmaster module - 2 channel -
master/slave access method - 500 mA



Main

Range of product	Modicon Premium Automation platform
Product or component type	Bus X remote rackmaster module
Number of channels	2

Complementary

Method of access	Master/Slave
Electrical connection	1 connector SUB-D 9 for the connection of channel 1 1 connector SUB-D 9
Local signalling	1 LED module running (R) 1 LED module acting as master or slave (MS) 1 LED internal fault, module failure (ERR) 1 LED external fault (I/O) 1 LED channel 1 operating (CH1) 1 LED channel 0 operating (CH0)
Current consumption	500 mA 5 V DC
Module format	Standard


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0832 - Schneider Electric declaration of conformity download declaration of conformity

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

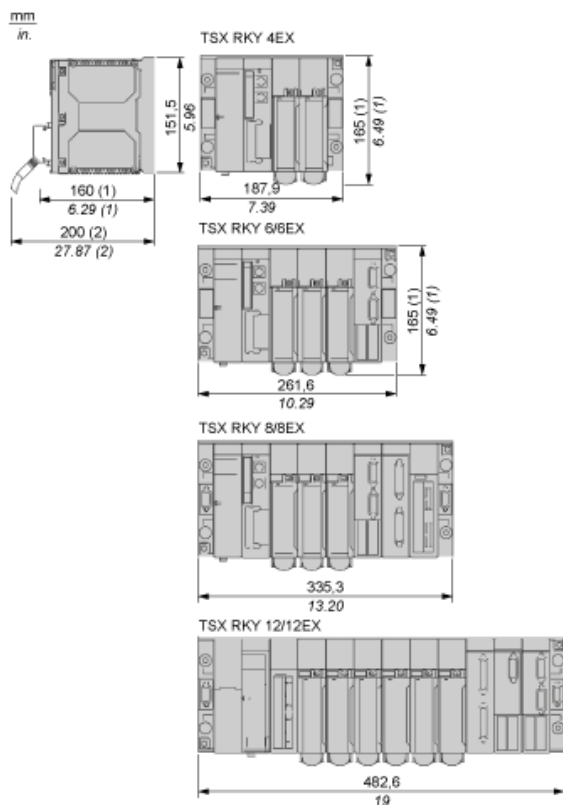


(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

Bus X Remote Rackmaster Module

Connecting Accessories

Installing a bus X extension requires the following elements:

1 TSXCBRY2500 kit including 1 cable, 250 m/820 ft long, supplied on a reel.	
1 set of 5 connectors TSXCBRYK5, which allows you to fit 2 extension cables, leaving you with one connector as a spare.	