

PB-DP SUB-D M12 35 T PS**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Similar to illustration**

Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly.

General ordering data

Version	SUB-D
Order No.	1368790000
Type	PB-DP SUB-D M12 35 T PS
GTIN (EAN)	4050118171105
Qty.	1 pc(s).

PB-DP SUB-D M12 35 T PS

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	16.8 mm	Depth (inches)	0.661 inch
Height	67.7 mm	Height (inches)	2.665 inch
Net weight	90 g	Width	46 mm
Width (inches)	1.811 inch		

Temperatures

Humidity	Max. 75% at +25°C, non-condensing
----------	-----------------------------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Technical specifications for sub-D connector

BUS PG interface	D-Sub 9-pole, Socket	BUS interface	D-Sub 9-pole, Pin
BUS, cable interface	M12 B-coded male and female connector, pins 2 and 4 assigned	Data rate	12 MBit/s
Housing main material	ZnAl	Humidity	Max. 75% at +25°C, non-condensing
Interlock	UNC4-40	Outgoing elbow	35°
Plug-in connector and pin assignment	In accordance with the PROFIBUS specification	Plugging cycles	≥ 200
Programming interface	Yes	Protection degree	IP30
Temperature range of housing	-20...+70 °C	Terminating resistor available	Yes

Technical data customisable plug-in connectors

Housing main material	ZnAl	Number of poles	9
Plugging cycles	≥ 200	Protection degree	IP30
Temperature range of housing	-20...+70 °C		

Classifications

ETIM 6.0	EC001132	ETIM 7.0	EC001132
ECLASS 9.0	27-44-03-02	ECLASS 9.1	27-44-03-90
ECLASS 10.0	27-44-03-02	ECLASS 11.0	27-44-03-02

Approvals

ROHS	Conform
------	---------


PB-DP SUB-D M12 35 T PS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Wiring diagram

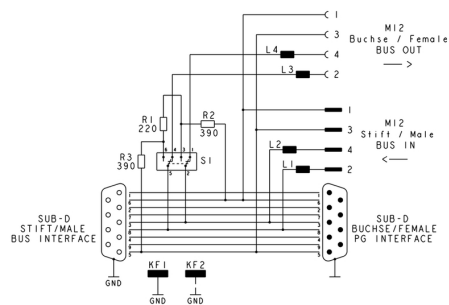

Montageanleitung: PROFIBUS Bus-Stecker Plug&Play mit M12 Kabelanschlüssen

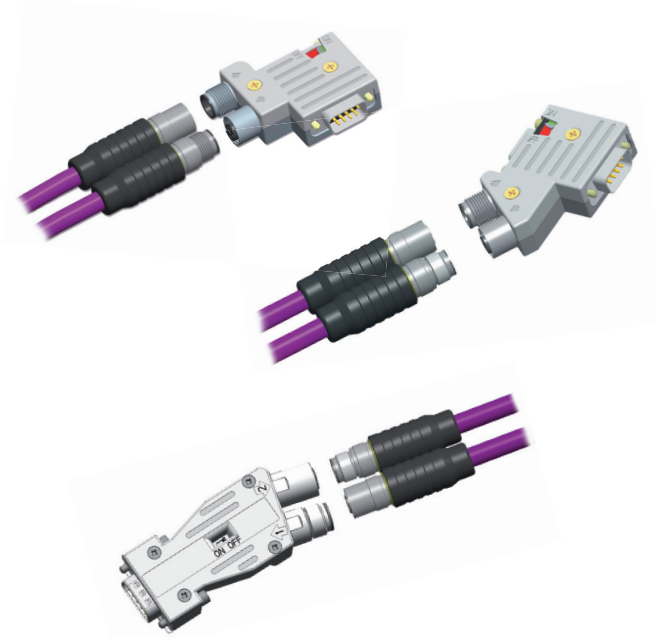


Art.-Nr.	Beschreibung	Abmessungen Busstecker
1140650000	PB-DP SUB-D M12 TERM	58,8 x 45 x 16,8 mm
1140640000	PB-DP SUB-D M12 TERM PS	58,8 x 45 x 16,8 mm
1264180000	PB-DP SUB-D M12 180	76,8 x 31,6 x 14,8 mm
1274250000	PB-DP SUB-D M12 180 OS	76,8 x 31,6 x 14,8 mm
1368780000	PB-DP SUB-D M12 35T	67,7 x 47,1 x 16,8 mm
1368790000	PB-DP SUB-D M12 35T PS	67,7 x 47,1 x 16,8 mm

Allgemeines

Die Busanschlussstecker sind speziell für den einfachen schnellen Plug&Play-Anschluss von Profibus-Netzkomponenten oder Profibus-Teilnehmern in Profibus-Systemen mit bis 12 Mbit/s ausgelegt. Die genormten Profibus D-Sub-Stecker werden an den Profibus-Teilnehmer gesteckt. Der Profibus Bus-Stecker ist mit 2 steckbaren M12-Anschlüssen mit B-Codierung gemäß Profibus-Spezifikation ausgeführt. Vollgeschirmte Profibus M12-Leitungen sind schnell und ohne zusätzliche Montagezeiten anschließbar.

Für die Schirmung und den sicheren Einsatz auch bei härteren Einsatzfällen sorgt das Vollmetallgehäuse.


Bus-Terminierung



Über den Schiebeschalter werden am Ende des Bussystems die Abschlusswiderstände aktiviert. Gleichzeitig wird der ausgangsseitige M12 – Anschluss abgeschaltet. Bei erforderlichlichem Busabschluss am Anfang des Profibus-Netzwerkes gehen Sie wie folgt vor: Verbinden Sie die M12 Profibus Ausgangsleitung (Buchse) mit dem Eingang von Stecker 2 (IN/Stift) und schließen Sie einen M12 Profibus-Abschlussstecker (Anschlussstecker in Buchsenausführung) an den Eingang von Stecker 1 (IN/Stift) an. Der Schiebeschalter bleibt auf Position „OFF“.

Falls der Profibusteilnehmer über eine interne Terminierung verfügt, ist der Schiebeschalter auf „OFF“ zu setzen. Der Profibus-Abschlussstecker entfällt.

Schaltbild

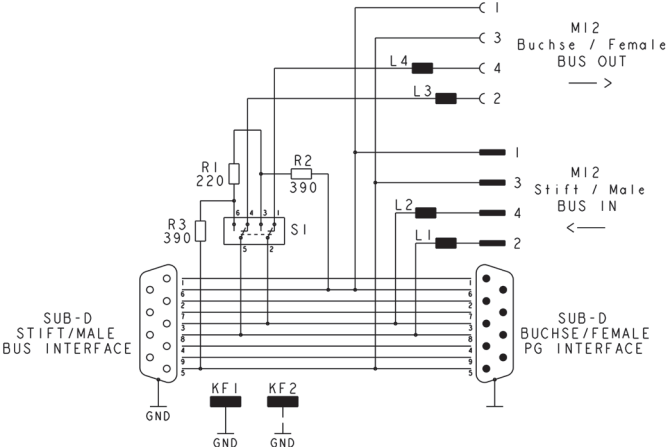

Technische Daten	
Profibus DP Interface	D-Sub, 9-polig, Stift
Profibus DP PG Interface	D-Sub, 9-polig, Buchse
Profibus Kabel Anschluss	M12 Profibus B-Code Stiftstecker M12 Profibus B-Code Buchsenstecker
M12 Stiftstecker: Eingangskabel M12 Buchsenstecker: Ausgangskabel Pin 1: + 5 V DC Pin 2: A (grün) Pin 3: DGND Pin 4: B (rot) Pin 5: nicht angeschlossen	Stift (IN) Buchse (OUT)
Terminierung	Schaltbare Terminierung mit Abschlusswiderständen gemäß der Profibusspezifikation.
Datenübertragungsrate	Gemäß der Profibusspezifikation, 12 MBit/s
Temperaturbeständigkeit	-20 °C - +70 °C
Zul. Luftfeuchtigkeit	Max. 75% bei +25 °C, nicht kondensierend
Schutzklasse	IP 30
Mechanische Lebensdauer Kontakte	200 Steckzyklen
Gehäusematerial	ZnAl
D-Sub Schraube	#4/40 UNC
Anzugsmoment der Rändelschraube	Max. 0,3 Nm
Anzugsmoment M12-Schraubverriegelung	0,6 Nm
CE Kennzeichnung	Stecker sind passive Bauelemente und unterliegen nicht der CE-Kennzeichnung gemäß der EU-Richtlinien.

Mounting Instruction: PROFIBUS Bus Connector Plug&Play with M12 cable connections




Part No.	Description	Dimensions Bus Connector
1140650000	PB-DP SUB-D M12 TERM	58,8 x 45 x 16,8 mm
1140640000	PB-DP SUB-D M12 TERM PS	58,8 x 45 x 16,8 mm
1264180000	PB-DP SUB-D M12 180	76,8 x 31,6 x 14,8 mm
1274250000	PB-DP SUB-D M12 180 OS	76,8 x 31,6 x 14,8 mm
1368780000	PB-DP SUB-D M12 35T	67,7 x 47,1 x 16,8 mm
1368790000	PB-DP SUB-D M12 35T PS	67,7 x 47,1 x 16,8 mm

General

The bus connectors are designed for the easy and fast plug & play of Profibus net components or Profibus participants in profibus systems with up to 12 Mbit/s. The profibus D-Sub connector, which is standardised at the front, is plugged into the Profibus participant. The Profibus bus connector has 2 mateable M12 Profibus connectors with B coding according to the Profibus specifications. Fully shielded M12 Profibus cable assemblies can be connected direct and quickly.

The die-cast hood guarantees the optimal shielding and safe use even in difficult cases.


Bus Termination




The bus termination at the end of the bus system is activated with the slide switch. The output will be switched off at the same time. For the bus termination at the beginning of the bus system following steps have to be done: The M12 Profibus output cable (female) has to be connected with the input of connector 2 (IN/male) and a M12 Profibus termination connector (termination connector in female version) with the input of connector 1 (IN/male). The switch keeps in position „OFF“.

If the Profibus participant has an internal bus termination the switch keeps in position „OFF“. The Profibus termination connector is not applicable.

Circuit diagram

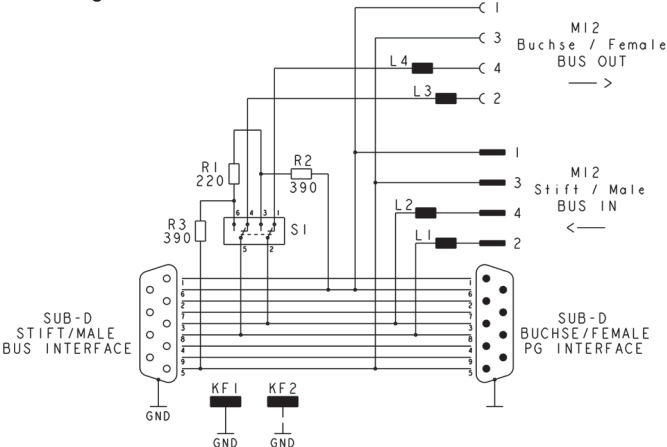

Technical Data	
Profibus DP Interface	D-Sub, 9-pin, male
Profibus DP PG Interface	D-Sub, 9-pin, female
Profibus Cable Interface	M12 Profibus B-Code male connector M12 Profibus B-Code female connector
M12 Male connector: input cable M12 Female connector: output cable Pin 1: + 5 V DC Pin 2: A (green) Pin 3: DGND Pin 4: B (red) Pin 5: not connected	Male (IN) Female (OUT) 
Termination	Switchable termination with resistors according to Profibus specification
Data transmission rate	According to Profibus specification, 12 MBit/s
Temperature range	-20 °C - +70 °C
Permissible humidity	Max. 75% at +25 °C, non-condensing
Protection class	IP 30
Mechanical lifetime contacts	200 Mating cycles
Housing material	ZnAl
D-Sub screw	#4/40 UNC
Torque of knurled locking screw	Max. 0,3 Nm
Torque of M12 screw locking	0,6 Nm
CE marking	Connectors are passive components and do not need to be identified with the CE marking according to EU directives.