SIEMENS

Data sheet 3RB3016-2PB0

Overload relay 1...4 A for motor protection Size S00, Class 20E Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset



Product brand name	SIRIUS
Product designation	solid-state overload relay
Product type designation	3RB3

General technical data	
Size of overload relay	S00
Size of contactor can be combined company-specific	S00
Power loss [W] total typical	0.1 W
Insulation voltage with degree of pollution 3 rated value	690 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
 in networks with grounded star point between auxiliary and auxiliary circuit 	300 V
 in networks with grounded star point between auxiliary and auxiliary circuit 	300 V
 in networks with grounded star point between main and auxiliary circuit 	600 V
 in networks with grounded star point between main and auxiliary circuit 	690 V
Protection class IP	

• on the front	IP20
• of the terminal	IP20
Shock resistance	15g / 11 ms
• acc. to IEC 60068-2-27	15g / 11 ms
Vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
Thermal current	4 A
Recovery time	
 after overload trip with automatic reset typical 	3 min
 after overload trip with remote-reset 	0 min
 after overload trip with manual reset 	0 min
Type of protection	II (2) G [Ex e] [Ex d] [Ex px] II (2) D [Ex t] [Ex p]
Certificate of suitability relating to ATEX	PTB 09 ATEX 3001
Protection against electrical shock	finger-safe

Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
during operation	-25 +60 °C
during storage	-40 +80 °C
 during transport 	-40 +80 °C
Temperature compensation	6025 °C
Relative humidity during operation	10 95 %

Main circuit	
Number of poles for main current circuit	3
Adjustable pick-up value current of the current-	1 4 A
dependent overload release	
Operating voltage	
• rated value	690 V
 at AC-3 rated value maximum 	690 V
Operating frequency rated value	50 60 Hz
Operating current rated value	4 A
Operating power for three-phase motors at 400 V at 50 Hz	0.37 1.5 kW

Auxiliary circuit	
Design of the auxiliary switch	integrated
Number of NC contacts	
● for auxiliary contacts	1
— Note	for contactor disconnection
Number of NO contacts	
● for auxiliary contacts	1
— Note	for message "tripped"
Number of CO contacts	

for auxiliary contacts	0
Operating current of auxiliary contacts at AC-15	
● at 24 V	4 A
● at 110 V	4 A
● at 120 V	4 A
● at 125 V	4 A
• at 230 V	3 A
Operating current of auxiliary contacts at DC-13	
● at 24 V	2 A
● at 60 V	0.55 A
● at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

Protective and monitoring functions Trip class CLASS 20E Design of the overload release electronic

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	4 A
• at 600 V rated value	4 A
Contact rating of auxiliary contacts according to UL	B600 / R300

Short-circuit protection

Design of the fuse link

 \bullet for short-circuit protection of the main circuit

— with type of coordination 1 required

— with type of assignment 2 required

• for short-circuit protection of the auxiliary switch

required

gG: 35 A, RK5: 15 A

gG: 20 A

fuse gG: 6 A

Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	direct mounting
Height	79 mm
Width	45 mm
Depth	73 mm
Required spacing	
with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm

— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	6 mm

Product function • (removable terminal for auxiliary and control circuit Type of electrical connection • (for main current circuit • (for auxiliary and control current circuit Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections • (for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — single or multi-stranded — finely stranded with core end processing • (for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • (for auxiliary contacts — for auxiliary contacts — finely stranded with core end processing • at AWG conductors for auxiliary contacts — finely stranded with core end processing • at AWG conductors for auxiliary contacts — finely stranded with core end processing • at AWG conductors with screw-type terminals • (for main contacts with screw-type terminals •	— at the side	6 mm
• removable terminal for auxiliary and control circuit Type of electrical connection • for main current circuit • for auxiliary and control current circuit Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0	Connections/Terminals	
Type of electrical connection • for main current circuit • for auxiliary and control current circuit Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid 1x (0.5 4 mm²), 2x (0.5 1.5 mm²), 2x (0.75 4 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) • at AWG conductors for auxiliary contacts 1x (0.5 2 mm²), 2x (0.5 2.5 mm²) • at AWG conductors for auxiliary contacts 1x (20 14), 2x (20 14) Tightening torque • for main contacts with screw-type terminals • for auxiliary contacts with screw-type terminals • for m	Product function	
Type of electrical connection • for main current circuit • for auxiliary and control current circuit Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 4 mm²), 2x (0.5 1,5 mm²), 2x (0.75 4 mm²) 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (20 14), 2x (20 14) Tightening torque • for main contacts with screw-type terminals • for auxiliary contacts Os an 12 N·m Design of the thread of the connection screw • for main contacts M3	 removable terminal for auxiliary and control 	Yes
• for main current circuit • for auxiliary and control current circuit Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x		
 ● for auxiliary and control current circuit Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections ● for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 4 mm²), 2x (0.5 1,5 mm²), 2x (0.75 4 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts — solid — single or multi-stranded — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)	••	
Arrangement of electrical connectors for main current circuit Type of connectable conductor cross-sections • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 4 mm²), 2x (0.5 1.5 mm²), 2x (0.75 4 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 (0.5 2.5 mm²) 2x (0.5	for main current circuit	screw-type terminals
circuit Type of connectable conductor cross-sections • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — solid — tinely stranded with core end processing • at AWG conductors for main contacts • for auxiliary contacts — solid — single or multi-stranded — single or multi-stranded — single or multi-stranded — finely stranded with core end processing • for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²),		screw-type terminals
 • for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts — solid — single or multi-stranded — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4	_	Top and bottom
- solid - single or multi-stranded - single or multi-stranded - finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 4 mm²), 2x (0.5 1,5 mm²), 2x (0.75 4 mm²) - finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts - solid - single or multi-stranded - single or multi-stranded - finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.	Type of connectable conductor cross-sections	
- single or multi-stranded - finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 12), 2x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts - solid - single or multi-stranded - finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²) 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0	• for main contacts	
- finely stranded with core end processing • at AWG conductors for main contacts 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 12) Type of connectable conductor cross-sections • for auxiliary contacts - solid - single or multi-stranded - finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 4 mm²), 2x (0.5 2.5 mm²) - finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²) 1x (20 14), 2x (20 14) Tightening torque • for main contacts with screw-type terminals • for auxiliary contacts with screw-type terminals • for auxiliary contacts with screw-type terminals 0.8 1.2 N·m Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw • for main contacts M3	— solid	1x (0.5 4 mm²), 2x (0.5 1.5 mm²), 2x (0.75 4 mm²)
 at AWG conductors for main contacts Type of connectable conductor cross-sections for auxiliary contacts — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts Tightening torque • for main contacts with screw-type terminals • for auxiliary contacts with screw-type terminals • for auxiliary contacts with screw-type terminals Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 M3 	— single or multi-stranded	1x (0,5 4 mm²), 2x (0,5 1,5 mm²), 2x (0,75 4 mm²)
Type of connectable conductor cross-sections	 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 2.5 mm²)
 for auxiliary contacts — solid	 at AWG conductors for main contacts 	1x (20 12), 2x (20 12)
solid single or multi-stranded single or multi-stranded finely stranded with core end processing finely stranded with core end processing at AWG conductors for auxiliary contacts at AWG conductors at AWG conductors for auxiliary contacts at AWG conductors at AWG conduc	Type of connectable conductor cross-sections	
- single or multi-stranded - finely stranded with core end processing - at AWG conductors for auxiliary contacts 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (20 14), 2x (20 14) Tightening torque - for main contacts with screw-type terminals - for auxiliary contacts - for main contacts 1x (0.5 4 mm²), 2x (0.5 2,5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (20 14) - for main contacts with screw-type terminals - for main contacts with screw-type terminals - for main contacts - for main contac	 for auxiliary contacts 	
— finely stranded with core end processing • at AWG conductors for auxiliary contacts 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 1x (20 14), 2x (20 14) Tightening torque • for main contacts with screw-type terminals • for auxiliary contacts with screw-type terminals • for auxiliary contacts with screw-type terminals Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw • for main contacts M3	— solid	1x (0.5 4 mm²), 2x (0.5 2.5 mm²)
 at AWG conductors for auxiliary contacts Tightening torque for main contacts with screw-type terminals for auxiliary contacts with screw-type terminals 0.8 1.2 N·m Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw for main contacts M3 	— single or multi-stranded	1x (0,5 4 mm²), 2x (0,5 2,5 mm²)
Tightening torque	 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
 for main contacts with screw-type terminals for auxiliary contacts with screw-type terminals Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw for main contacts M3 	 at AWG conductors for auxiliary contacts 	1x (20 14), 2x (20 14)
for auxiliary contacts with screw-type terminals Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw for main contacts M3	Tightening torque	
Design of screwdriver shaft Diameter 5 to 6 mm Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw • for main contacts M3	 for main contacts with screw-type terminals 	0.8 1.2 N·m
Size of the screwdriver tip Pozidriv PZ 2 Design of the thread of the connection screw • for main contacts M3	 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
Design of the thread of the connection screw • for main contacts M3	Design of screwdriver shaft	Diameter 5 to 6 mm
• for main contacts M3	Size of the screwdriver tip	Pozidriv PZ 2
	Design of the thread of the connection screw	
• of the auxiliary and control contacts M3	• for main contacts	M3
	 of the auxiliary and control contacts 	M3

Type of voltage supply via input/output link master No Electromagnetic compatibility Conducted interference 2 kV (power ports), 1 kV (signal ports) corresponds to degree of • due to burst acc. to IEC 61000-4-4 severity 3 2 kV (line to earth) corresponds to degree of severity 3 • due to conductor-earth surge acc. to IEC 61000-4-5 1 kV (line to line) corresponds to degree of severity 3 • due to conductor-conductor surge acc. to IEC 61000-4-5 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM • due to high-frequency radiation acc. to IEC 61000-4-6 with 1 kHz Field-bound parasitic coupling acc. to IEC 61000-4-3 10 V/m

Display	
Display version	
 for switching status 	Slide switch

6 kV contact discharge / 8 kV air discharge

for switching status			Slide switch			
Certificates/appro	ovals					
General Product Approval				For use in hazardous locations		
((C)	(SA)	UL UL	EAC	C-Tick	(Ex)	

Declaration of Conformity	Test Certificates		Marine / Shipping		
EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report	ABS	BUREAU VERITAS	Lloyd's Register _{LRS}

Marine / Shipping

other





Electrostatic discharge acc. to IEC 61000-4-2





Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3016-2PB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3016-2PB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RB3016-2PB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3016-2PB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB3016-2PB0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3016-2PB0&objecttype=14&gridview=view1

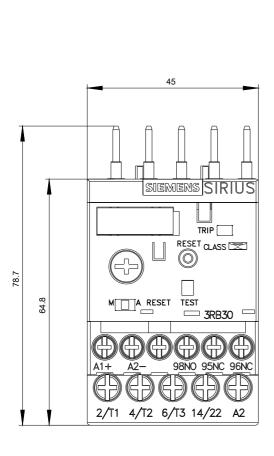

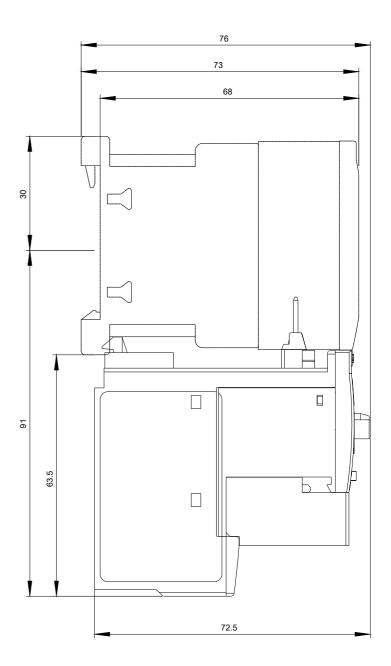

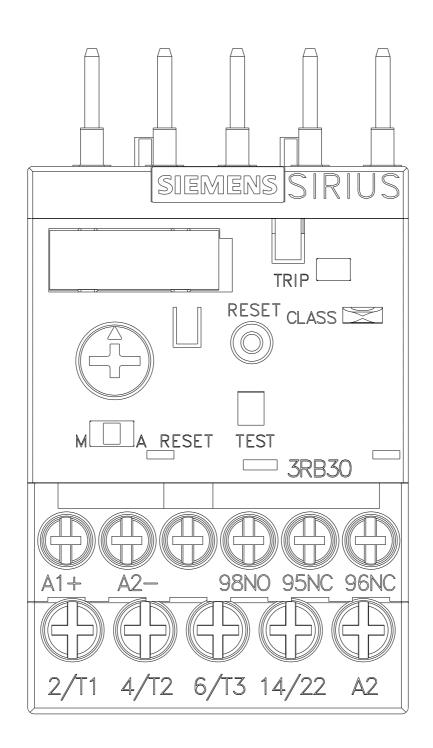

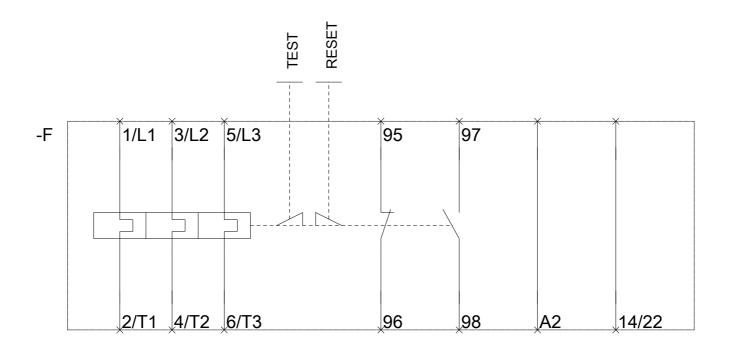

last modified: 03/23/2018