# **SIEMENS**

Data sheet 3RT2015-1BF42

Power contactor, AC-3 7 A, 3 kW / 400 V 1 NC, 110 V DC 3-pole, Size S00 screw terminal



Product brand name	SIRIUS
Product designation	Power contactor
Product type designation	3RT2

General technical data	
Size of contactor	S00
Product extension	
<ul> <li>function module for communication</li> </ul>	No
<ul> <li>Auxiliary switch</li> </ul>	Yes
Surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>between coil and main contacts acc. to EN</li> </ul>	400 V
60947-1	
Protection class IP	
• on the front	IP20
• of the terminal	IP20
Shock resistance at rectangular impulse	
• at DC	6,7g / 5 ms, 4,2g / 10 ms

Shock resistance with sine pulse	
• at DC	10,5g / 5 ms, 6,6g / 10 ms
Mechanical service life (switching cycles)	
of contactor typical	30 000 000
<ul> <li>of the contactor with added electronics- compatible auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	К
Reference code acc. to DIN EN 81346-2	Q
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
Operating current	
● at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	18 A
● at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	18 A
<ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>	16 A
• at AC-2 at 400 V rated value	7 A
• at AC-3	
— at 400 V rated value	7 A
— at 500 V rated value	6 A
— at 690 V rated value	4.9 A
• at AC-4 at 400 V rated value	6.5 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	2.5 mm²
• at 40 °C minimum permissible	2.5 mm²
Operating current for approx. 200000 operating cycles at AC-4	

• at 400 V rated value	2.6 A
• at 690 V rated value	1.8 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	1.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.42 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	8.4 A
— at 220 V rated value	1.2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.5 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	15 A
— at 220 V rated value	15 A
— at 440 V rated value	0.9 A
— at 600 V rated value	0.7 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	15 A
— at 110 V rated value	0.1 A
• with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	15 A
— at 110 V rated value	0.25 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	15 A
— at 110 V rated value	15 A
— at 220 V rated value	1.2 A
— at 440 V rated value	0.14 A
— at 600 V rated value	0.14 A
Operating power	
• at AC-1	
— at 230 V rated value	6.3 kW
— at 230 V at 60 °C rated value	6 kW
— at 400 V rated value	11 kW
— at 400 V at 60 °C rated value	10.5 kW
— at 690 V rated value	19 kW

— at 690 V at 60 °C rated value	18 kW
• at AC-2 at 400 V rated value	3 kW
• at AC-3	
— at 230 V rated value	1.5 kW
— at 400 V rated value	3 kW
— at 500 V rated value	3 kW
— at 690 V rated value	4 kW
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	1.15 kW
• at 690 V rated value	1.15 kW
Thermal short-time current limited to 10 s	56 A
Power loss [W] at AC-3 at 400 V for rated value of	0.4 W
the operating current per conductor	
No-load switching frequency	
• at DC	10 000 1/h
Operating frequency	
at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
Type of voltage of the control supply voltage	DC
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value	DC 110 V
Type of voltage of the control supply voltage Control supply voltage at DC	110 V
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated	
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC	110 V
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC	110 V  0.8  1.1 4 W
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC	110 V  0.8 1.1
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay	110 V  0.8  1.1  4 W  4 W
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC	110 V  0.8  1.1 4 W
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay	110 V  0.8  1.1  4 W  4 W  30 100 ms
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC  Arcing time	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms  10 15 ms
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC  Arcing time  Control version of the switch operating mechanism	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms  10 15 ms
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC  Arcing time  Control version of the switch operating mechanism  Auxiliary circuit  Number of NC contacts for auxiliary contacts	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms  10 15 ms  Standard A1 - A2
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC  Arcing time  Control version of the switch operating mechanism  Auxiliary circuit  Number of NC contacts for auxiliary contacts  • instantaneous contact	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms  10 15 ms  Standard A1 - A2
Type of voltage of the control supply voltage  Control supply voltage at DC  • rated value  Operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • Full-scale value  Closing power of magnet coil at DC  Holding power of magnet coil at DC  Closing delay  • at DC  Opening delay  • at DC  Arcing time  Control version of the switch operating mechanism  Auxiliary circuit  Number of NC contacts for auxiliary contacts	110 V  0.8  1.1  4 W  4 W  30 100 ms  7 13 ms  10 15 ms  Standard A1 - A2

Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
● at 600 V rated value	0.1 A
• at 220 V rated value	0.3 A
• at 125 V rated value	0.9 A
• at 110 V rated value	1 A
• at 60 V rated value	2 A
• at 48 V rated value	2 A
• at 24 V rated value	10 A
Operating current at DC-13	
• at 600 V rated value	0.15 A
• at 220 V rated value	1 A
• at 125 V rated value	2 A
• at 110 V rated value	3 A
• at 60 V rated value	6 A
• at 48 V rated value	6 A
• at 24 V rated value	10 A
Operating current at DC-12	
• at 690 V rated value	1 A
• at 500 V rated value	2 A
• at 400 V rated value	3 A
• at 230 V rated value	10 A

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	4.8 A
• at 600 V rated value	6.1 A
Yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	0.25 hp
— at 230 V rated value	0.75 hp
<ul> <li>for three-phase AC motor</li> </ul>	
— at 200/208 V rated value	1.5 hp
— at 220/230 V rated value	2 hp
— at 460/480 V rated value	3 hp
— at 575/600 V rated value	5 hp
Contact rating of auxiliary contacts according to UL	A600 / Q600

#### Short-circuit protection

## Design of the fuse link

- for short-circuit protection of the main circuit
  - with type of coordination 1 required

gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)

— with type of assignment 2 required

gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V, 80kA)

• for short-circuit protection of the auxiliary switch required

fuse gG: 10 A

Mounting position	+/-180° rotation possible on vertical mounting surface; can be
Modified position	tilted forward and backward by +/- 22.5° on vertical mounting
	surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
Side-by-side mounting	Yes
Height	58 mm
Width	45 mm
Depth	73 mm
Required spacing	
<ul><li>with side-by-side mounting</li></ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/Terminals	
Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²
<ul> <li>single or multi-stranded</li> </ul>	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG conductors for main contacts	2x (20 16), 2x (18 14), 2x 12
Connectable conductor cross-section for main	

• solid	0.5 4 mm²
• stranded	0.5 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
Connectable conductor cross-section for auxiliary	
contacts	
<ul> <li>single or multi-stranded</li> </ul>	0.5 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
Type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
<ul><li>— single or multi-stranded</li></ul>	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14), 2x 12
AWG number as coded connectable conductor cross	
section	
• for main contacts	20 12
• for auxiliary contacts	20 12

Safety related data	
B10 value	
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	1 000 000
Proportion of dangerous failures	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	73 %
Failure rate [FIT]	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	100 FIT
Product function	
<ul> <li>Mirror contact acc. to IEC 60947-4-1</li> </ul>	Yes
T1 value for proof test interval or service life acc. to	20 y
IEC 61508	
Protection against electrical shock	finger-safe

# Certificates/approvals

#### **General Product Approval**

**Functional** Safety/Safety of Machinery







KC



Type Examination

Declaration	of
Conformity	

**Test Certificates** 

Marine / Shipping



Type Test Certificates/Test Report

**Special Test** Certificate







GL

other

## Marine / Shipping

Lloyd's Register LRS









Confirmation

#### other



#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2015-1BF42

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2015-1BF42


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1BF42


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2015-1BF42\&lang=en.pdf} \\ \underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2015-1BF42\&lang=en.pdf} \\ \underline{\text{http://www.automation.siemens.com/bilddb/cax\_de.aspx.pdf} \\ \underline{\text{http://www.automation.siemens.co$ 


Characteristic: Tripping characteristics, I2t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RT2015-1BF42/char


Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2015-1BF42&objecttype=14&gridview=view1







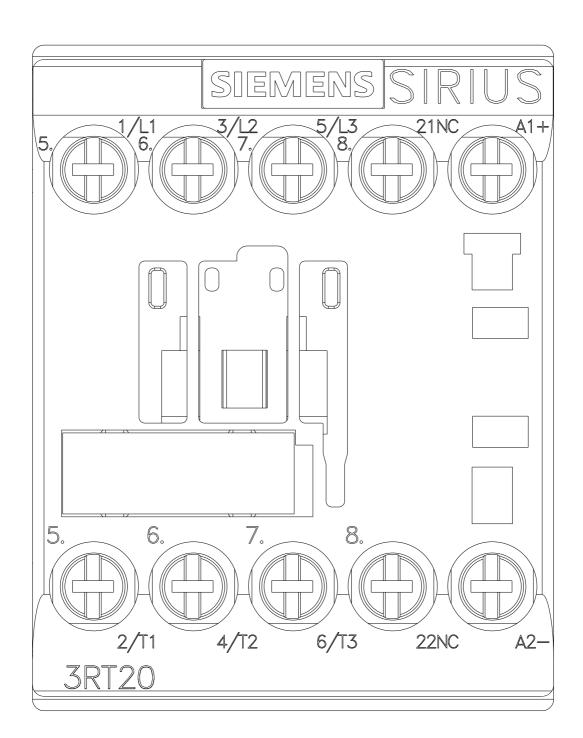

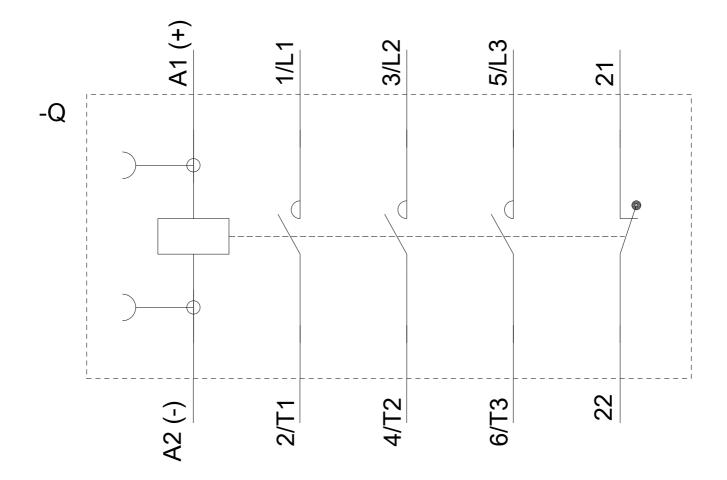

last modified: 07/16/2018