# **SIEMENS**

Data sheet 3RT2027-1AM20



power contactor, AC-3e/AC-3, 32 A, 15 kW / 400 V, 3-pole, 208 V AC, 50 / 60 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S0
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
at AC in hot operating state	6.3 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.3 W
<ul> <li>without load current share typical</li> </ul>	10.5 W
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	8,3g / 5 ms, 5,3g / 10 ms
shock resistance with sine pulse	
• at AC	13,5g / 5 ms, 8,3g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	

number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	ŭ
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated value	50 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	50 A
<ul> <li>— up to 690 V at ambient temperature 60 °C rated value</li> <li>at AC-3</li> </ul>	42 A
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
• at AC-3e	
— at 400 V rated value	32 A
— at 500 V rated value	32 A
— at 690 V rated value	21 A
at AC-4 at 400 V rated value	22 A
at AC-5a up to 690 V rated value	44 A
at AC-5b up to 400 V rated value	26.5 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	30.8 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	30.8 A
— up to 500 V for current peak value n=20 rated value	27 A
<ul> <li>up to 690 V for current peak value n=20 rated value</li> <li>at AC-6a</li> </ul>	21 A
up to 230 V for current peak value n=30 rated value	20.5 A
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	20.5 A
— up to 500 V for current peak value n=30 rated value	18 A
— up to 690 V for current peak value n=30 rated value  minimum cross-section in main circuit at maximum AC-1	18 A 10 mm²
rated value operational current for approx. 200000 operating	
cycles at AC-4	
<ul> <li>at 400 V rated value</li> </ul>	12 A
• at 690 V rated value	12 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
with 2 current paths in series at DC-1	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
with 3 current paths in series at DC-1	05.4
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	35 A
— at 440 V rated value	2.9 A

at 600 V rated value	1.4.6
— at 600 V rated value	1.4 A
<ul> <li>at 1 current path at DC-3 at DC-5</li> <li>— at 24 V rated value</li> </ul>	20 A
— at 24 V rated value  — at 220 V rated value	1 A
— at 440 V rated value	0.09 A
— at 600 V rated value	0.09 A 0.06 A
• with 2 current paths in series at DC-3 at DC-5	0.00 A
— at 24 V rated value	35 A
— at 110 V rated value	15 A
— at 220 V rated value	3 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
with 3 current paths in series at DC-3 at DC-5	0.1071
— at 24 V rated value	35 A
— at 110 V rated value	35 A
— at 220 V rated value	10 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
operating power	
at AC-2 at 400 V rated value	15 kW
• at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
• at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	15 kW
— at 690 V rated value	18.5 kW
operating power for approx. 200000 operating cycles	
at AC-4	
• at 400 V rated value	6 kW
at 690 V rated value	10.3 kW
operating apparent power at AC-6a	40.011/4
• up to 230 V for current peak value n=20 rated value	12.2 kVA
• up to 400 V for current peak value n=20 rated value	21.3 kVA
up to 500 V for current peak value n=20 rated value	23.3 kVA
• up to 690 V for current peak value n=20 rated value	25 kVA
operating apparent power at AC-6a	0.4 b)/A
• up to 230 V for current peak value n=30 rated value	8.1 kVA
<ul> <li>up to 400 V for current peak value n=30 rated value</li> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	14.2 kVA
·	15.5 kVA
up to 690 V for current peak value n=30 rated value  short-time withstand current in cold operating state.	21.5 kVA
short-time withstand current in cold operating state up to 40 °C	
Iimited to 1 s switching at zero current maximum	499 A; Use minimum cross-section acc. to AC-1 rated value
limited to 5 s switching at zero current maximum	341 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10 s switching at zero current maximum	260 A; Use minimum cross-section acc. to AC-1 rated value
limited to 30 s switching at zero current maximum	199 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 60 s switching at zero current maximum</li> </ul>	162 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	5 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	208 V
• at 60 Hz rated value	208 V

operating range factor control supply voltage rated	
value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	81 VA
● at 60 Hz	79 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.72
● at 60 Hz	0.74
apparent holding power of magnet coil at AC	
• at 50 Hz	10.5 VA
● at 60 Hz	8.5 VA
inductive power factor with the holding power of the	
coil	
● at 50 Hz	0.25
● at 60 Hz	0.28
closing delay	
• at AC	8 40 ms
opening delay	
• at AC	4 16 ms
arcing time	10 10 ms
control version of the switch operating mechanism	Standard A1 - A2
	Otanida (1) 1/2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	1071
• at 230 V rated value	10 A
at 400 V rated value	3 A
at 500 V rated value     at 500 V rated value	2 A
	2 A
	1 A
• at 690 V rated value	1 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> </ul>	
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> </ul>	10 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> </ul>	10 A 6 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> </ul>	10 A 6 A 6 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> </ul>	10 A 6 A 6 A 3 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 60 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 60 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A 10 A 2 A 2 A 1 A 0.9 A 0.3 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 200 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 2 A 2 A 2 A 2 A 3 A 0.1 A
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 2 A 2 A 2 A 2 A 3 A 0.1 A
at 690 V rated value operational current at DC-12  at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 60 V rated value at 60 V rated value at 125 V rated value at 600 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value operational current at DC-12  at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value operational current at DC-12  at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value operational current at DC-12  at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 125 V rated value at 600 V rated value contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value operational current at DC-12  at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 125 V rated value at 600 V rated value contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value operational current at DC-12  at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 125 V rated value at 120 V rated value at 220 V rated value at 220 V rated value at 600 V rated value for at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 690 V rated value     operational current at DC-12     at 24 V rated value     at 48 V rated value     at 60 V rated value     at 110 V rated value     at 125 V rated value     at 220 V rated value     at 600 V rated value     at 600 V rated value     at 600 V rated value     operational current at DC-13     at 24 V rated value     at 48 V rated value     at 60 V rated value     at 110 V rated value     at 125 V rated value     at 125 V rated value     at 220 V rated value     at 600 V rated value     ortact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor     at 480 V rated value     at 600 V rated value     ortical performance [hp]     or single-phase AC motor     — at 110/120 V rated value     — at 230 V rated value	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 100 V rated value</li> <li>at 100 V rated value</li> <li>at 200 V rated value</li> <li>at 200 V rated value</li> <li>at 300 V rated value</li> <li>at 200 V rated value</li> <li>at 300 V rated value</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul>	10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 48 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 700 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> </ul>	10 A 6 A 6 A 6 A 7 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  27 A 27 A 2 hp 5 hp 10 hp
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>ontact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>ofor single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>for 3-phase AC motor</li> <li>at 220/230 V rated value</li> </ul>	10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  27 A 27 A 2 hp 5 hp 10 hp 10 hp
<ul> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 48 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 700 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> </ul>	10 A 6 A 6 A 6 A 7 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  27 A 27 A 2 hp 5 hp 10 hp

• ,	00 / P600
protection	
e fuse link	
rt-circuit protection of the main circuit	
	125A (690V,100kA), aM: 50A (690V,100kA), BS88: 125A
•	5V,80kA)
	50A (690V,100kA), aM: 25A (690V, 100kA), BS88: 50A (415V,
80k	<b>,</b>
rt-circuit protection of the auxiliary switch gG:	10 A (500 V, 1 kA)
acunting/ dimensions	
nounting/ dimensions	000 ( )
	80° rotation possible on vertical mounting surface; can be tilted vard and backward by +/- 22.5° on vertical mounting surface
	ew and snap-on mounting onto 35 mm DIN rail according to DIN EN
607	
y-side mounting Yes	
85 r	
45 r	
97 r	
acing	
de-by-side mounting	
rwards 10 r	mm
owards 10 r	
ownwards 10 r	
the side 0 m	m
unded parts	
rwards 10 r	mm
owards 10 r	mm
the side 6 m	m
ownwards 10 r	mm
parts	
rwards 10 r	mm
owards 10 r	mm
ownwards 10 r	mm
the side 6 m	m
Terminals	
rical connection	
	ew-type terminals
•	ew-type terminals
•	ew-type terminals
	ew-type terminals
nectable conductor cross-sections	
n contacts	
•	1 2.5 mm²), 2x (2.5 10 mm²)
	1 2.5 mm²), 2x (2.5 10 mm²)
, ,	1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
G cables for main contacts 2x (	16 12), 2x (14 8)
conductor cross-section for main	
	10 mm <sup>2</sup>
ed 1	10 mm <sup>2</sup>
tranded with core end processing 1	10 mm <sup>2</sup>
conductor cross-section for auxiliary	
r stranded 0.5	2.5 mm²
tranded with core end processing 0.5	2.5 mm²
ectable conductor cross-sections	
iliary contacts	
	0.5 1.5 mm²), 2x (0.75 2.5 mm²)
,	0.5 1.5 mm²), 2x (0.75 2.5 mm²)
-	
er as coded connectable conductor cross	20 10), 2A (10 11)
n contacts 16	8
er as coded connectable conductor cross n contacts 16.	8 14

## Safety related data product function • mirror contact according to IEC 60947-4-1 B10 value with high demand rate according to SN 31920

proportion of dangerous failures with low demand rate according to SN 31920 with high demand rate according to SN 31920 73 %

failure rate [FIT] with low demand rate according to SN

T1 value for proof test interval or service life according to IEC 61508

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529 suitability for use

· safety-related switching on

· safety-related switching OFF

Yes

450 000

40 %

100 FIT

20 a

IP20

finger-safe, for vertical contact from the front

Yes

Yes

#### Certificates/ approvals

#### **General Product Approval**





Confirmation



**KC** 



**EMC** 

**Functional** Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 



Type Examination **Certificate** 





Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>

### Marine / Shipping













other

Railway

Confirmation



Vibration and Shock

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2027-1AM20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2027-1AM20


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2027-1AM20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2027-1AM20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current





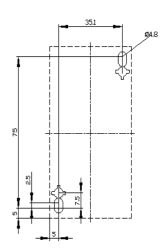

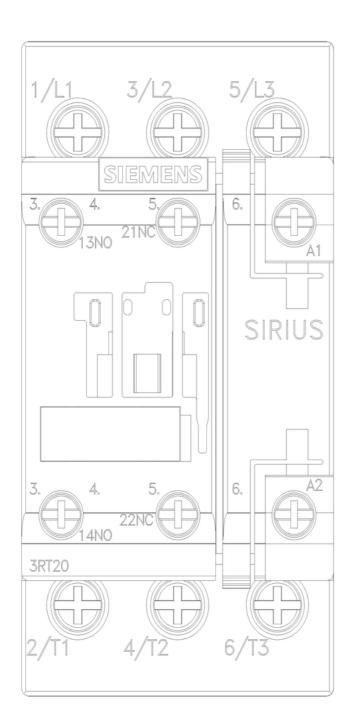

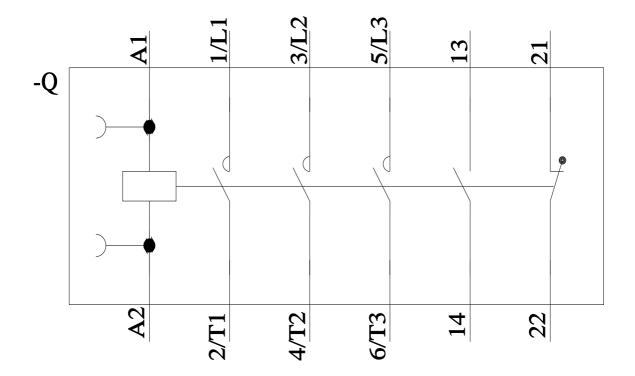

last modified: 11/21/2022 🖸