## **SIEMENS**

Data sheet 3RT2035-1AN24



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 220 V AC, 50 / 60 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, removable auxiliary switch

product brand name	SIRIUS	
product designation	Power contactor	
product type designation	3RT2	
General technical data		
size of contactor	S2	
product extension		
<ul> <li>function module for communication</li> </ul>	No	
<ul><li>auxiliary switch</li></ul>	No	
power loss [W] for rated value of the current		
<ul> <li>at AC in hot operating state</li> </ul>	6.6 W	
<ul> <li>at AC in hot operating state per pole</li> </ul>	2.2 W	
<ul> <li>without load current share typical</li> </ul>	17.2 W	
insulation voltage		
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V	
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V	
surge voltage resistance		
<ul> <li>of main circuit rated value</li> </ul>	6 kV	
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV	
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V	
shock resistance at rectangular impulse		
• at AC	9.8g / 5 ms, 6.5g / 10 ms	
shock resistance with sine pulse		
• at AC	15.3g / 5 ms, 10.1g / 10 ms	
mechanical service life (operating cycles)		
<ul> <li>of contactor typical</li> </ul>	10 000 000	
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000	
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2014	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
<ul> <li>during operation</li> </ul>	-25 +60 °C	
<ul> <li>during storage</li> </ul>	-55 +80 °C	
relative humidity minimum	10 %	
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %	
Main circuit		

number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>	60 A
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	60 A
<ul> <li>— up to 690 V at ambient temperature 60 °C rated value</li> <li>at AC-3</li> </ul>	55 A
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	41 A
— at 500 V rated value	41 A
— at 690 V rated value	24 A
• at AC-4 at 400 V rated value	35 A
<ul><li>at AC-5a up to 690 V rated value</li></ul>	52.8 A
<ul> <li>at AC-5b up to 400 V rated value</li> </ul>	33.2 A
<ul><li>at AC-6a</li><li>— up to 230 V for current peak value n=20 rated</li></ul>	36.5 A
value — up to 400 V for current peak value n=20 rated	36.5 A
value — up to 500 V for current peak value n=20 rated value	36.5 A
— up to 690 V for current peak value n=20 rated value	24 A
<ul> <li>at AC-6a</li> <li>up to 230 V for current peak value n=30 rated</li> </ul>	24.2 A
value — up to 400 V for current peak value n=30 rated value	24.2 A
— up to 500 V for current peak value n=30 rated value	24.2 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at AC-4	
at 400 V rated value	22 A
at 690 V rated value	18.5 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
<ul><li>with 2 current paths in series at DC-1</li></ul>	
— at 24 V rated value	55 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
with 3 current paths in series at DC-1     — at 24 V rated value	55 A
— at 24 v rated value  — at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A

1000 // 1 1 1	444
— at 600 V rated value	1.4 A
• at 1 current path at DC-3 at DC-5	05 A
— at 24 V rated value	35 A
— at 220 V rated value — at 440 V rated value	1 A
	0.1 A 0.06 A
<ul> <li>— at 600 V rated value</li> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	0.06 A
— at 24 V rated value	55 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
• at AC-2 at 400 V rated value	18.5 kW
• at AC-3	
— at 230 V rated value	11 kW
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	22 kW
• at AC-3e	44 144
— at 230 V rated value  — at 400 V rated value	11 kW 18.5 kW
— at 400 V rated value  — at 500 V rated value	22 kW
— at 690 V rated value	22 kW
operating power for approx. 200000 operating cycles	LL IVV
at AC-4	
<ul> <li>at 400 V rated value</li> </ul>	11.6 kW
<ul><li>at 690 V rated value</li></ul>	16.8 kW
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	14.5 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	25.2 kVA
• up to 500 V for current peak value n=20 rated value	31.6 kVA
• up to 690 V for current peak value n=20 rated value	28.6 kVA
operating apparent power at AC-6a	0.01374
• up to 230 V for current peak value n=30 rated value	9.6 kVA
up to 400 V for current peak value n=30 rated value     up to 500 V for current peak value n=30 rated value	16.8 kVA 21 kVA
<ul> <li>up to 500 V for current peak value n=30 rated value</li> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	28.6 kVA
short-time withstand current in cold operating state	20.0 KVA
up to 40 °C	
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	843 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	596 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	400 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	241 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 60 s switching at zero current maximum</li> </ul>	196 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	5 000 1/h
operating frequency	4 000 4 11
at AC-1 maximum     at AC-2 maximum	1 200 1/h
• at AC-2 maximum	750 1/h
<ul><li>at AC-3 maximum</li><li>at AC-3e maximum</li></ul>	1 000 1/h 1 000 1/h
at AC-3e maximum     at AC-4 maximum	300 1/h
	000 1/11
Control circuit/ Control	AC
type of voltage of the control supply voltage	AC
control supply voltage at AC  • at 50 Hz rated value	220 V
at 60 Hz rated value      at 60 Hz rated value	220 V
- at 00 FIZ Tatod Value	

operating range factor control supply voltage rated	
value of magnet coil at AC	
• at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	210 VA
● at 60 Hz	188 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.69
● at 60 Hz	0.65
apparent holding power of magnet coil at AC	
• at 50 Hz	17.2 VA
● at 60 Hz	16.5 VA
inductive power factor with the holding power of the	
coil	
● at 50 Hz	0.36
● at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
•	Standard A1 - A2
control version of the switch operating mechanism	Stalldard AT - AZ
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
instantaneous contact	
number of NO contacts for auxiliary contacts	2
instantaneous contact	40.4
operational current at AC-12 maximum	10 A
operational current at AC-15	
<ul> <li>at 230 V rated value</li> </ul>	6 A
<ul> <li>at 400 V rated value</li> </ul>	3 A
<ul> <li>at 500 V rated value</li> </ul>	2 A
<ul> <li>at 690 V rated value</li> </ul>	1 A
operational current at DC-12	
<ul> <li>at 24 V rated value</li> </ul>	10 A
<ul> <li>at 48 V rated value</li> </ul>	6 A
	C A
<ul> <li>at 60 V rated value</li> </ul>	6 A
<ul><li>at 60 V rated value</li><li>at 110 V rated value</li></ul>	3 A
at 110 V rated value	3 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> </ul>	3 A 2 A 1 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13	3 A 2 A 1 A 0.15 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A 6 A 2 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A 6 A 2 A 2 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value<!--</td--><td>3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)</td></li></ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 200 V rated value</li> <li>at 600 V rated value</li> <li>at 700 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>pielded mechanical performance [hp]</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value full-load current (FLA) for 3-phase AC motor at 480 V rated value full-load current value at 600 V rated value	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  40 A 41 A
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>of 600 V rated value</li> <li>rat 600 V rated value</li> <li>vielded mechanical performance [hp]</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>at 230 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 100 V rated value</li> <li>at 200 V rated value</li> <li>at 200 V rated value</li> <li>at 300 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  40 A 41 A  3 hp 7.5 hp
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  40 A 41 A  3 hp 7.5 hp 10 hp
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> <li>at 220/230 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  40 A 41 A  3 hp 7.5 hp  10 hp 15 hp
<ul> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>operational current at DC-13</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>contact reliability of auxiliary contacts</li> <li>UL/CSA ratings</li> <li>full-load current (FLA) for 3-phase AC motor</li> <li>at 480 V rated value</li> <li>at 600 V rated value</li> <li>for single-phase AC motor</li> <li>at 110/120 V rated value</li> <li>for single-phase AC motor</li> <li>at 230 V rated value</li> <li>for 3-phase AC motor</li> <li>at 200/208 V rated value</li> </ul>	3 A 2 A 1 A 0.15 A  6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)  40 A 41 A  3 hp 7.5 hp 10 hp

contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> <li>— with type of coordination 1 required</li> </ul>	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415
— with type of assignment 2 required	V, 80 kA) gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
nstallation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted
fastening method	forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
side-by-side mounting	Yes
height	114 mm
width	55 mm
depth	174 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
	10 111111
• for live parts	40
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
of magnet coil	Screw-type terminals
type of connectable conductor cross-sections for main contacts	
solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
finely stranded with core end processing     connectable conductor cross-section for main	2x (1 25 mm²), 1x (1 35 mm²)
<ul><li>finely stranded with core end processing</li></ul>	1 35 mm²
connectable conductor cross-section for auxiliary contacts	1 33 Hilli
solid or stranded	0.5 2.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm <sup>2</sup>
type of connectable conductor cross-sections	
for auxiliary contacts	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section	(), <u></u> ( )
<ul> <li>for main contacts</li> </ul>	18 1
for auxiliary contacts	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-</li> </ul>	No
poolaroi, arroir operation according to 120 ccc	

B10 value with high demand rate according to SN 31920 proportion of dangerous failures

• with low demand rate according to SN 31920

• with high demand rate according to SN 31920

failure rate [FIT] with low demand rate according to SN 31920

T1 value for proof test interval or service life according to IEC 61508

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529 suitability for use

· safety-related switching OFF

1 000 000

40 %

73 %

100 FIT

20 a

IP20

finger-safe, for vertical contact from the front

Yes

Certificates/ approvals

## **General Product Approval**



Confirmation





<u>KC</u>



**EMC** 

**Functional** Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 



Type Examination **Certificate** 





**Special Test Certific-**<u>ate</u>

Type Test Certificates/Test Report

## Marine / Shipping













Marine / Shipping

other

**Environmental Con-**

Railway

**Dangerous Good Transport Informa-**



Confirmation

**firmations** 

Confirmation

Vibration and Shock

tion

## **Further information**

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-1AN24

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2035-1AN24

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-1AN24

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2035-1AN24&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-1AN24/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2035-1AN24&objecttype=14&gridview=view1







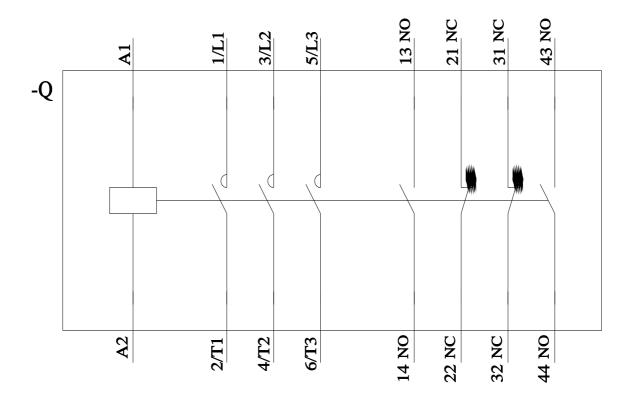

last modified: 11/21/2022 🖸