# **SIEMENS**

Data sheet 3RT2036-1AN20

CONTACTOR,AC3:22KW/400V, 1NO+1NC, 220V AC 50/60HZ, 3-POLE, SIZE S2, SCREW TERMINAL terminal



Figure similar

Product brand name	SIRIUS
Product designation	Power contactor
Product type designation	3RT2

General technical data	
Size of contactor	S2
Product extension	
<ul> <li>function module for communication</li> </ul>	No
Auxiliary switch	Yes
Insulation voltage	
rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>between coil and main contacts acc. to EN</li> </ul>	400 V
60947-1	
Protection class IP	
• on the front	IP20

of the terminal	IP00
	11 00
Shock resistance at rectangular impulse	11.8g / 5 ms, 7.4g / 10 ms
• at AC	11.0g / 3 liis, 7.4g / 10 liis
Shock resistance with sine pulse	19 Eq./ E. mo. 11 Eq./ 10 mo.
• at AC	18.5g / 5 ms, 11.6g / 10 ms
Mechanical service life (switching cycles)	10 000 000
of contactor typical	
<ul> <li>of the contactor with added electronics- compatible auxiliary switch block typical</li> </ul>	5 000 000
	10 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
<ul><li>during operation</li></ul>	-25 +60 °C
during storage	-55 +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Operating voltage	
• at AC-3 rated value maximum	690 V
Operating current	
● at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	70 A
• at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	70 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	60 A
• at AC-2 at 400 V rated value	50 A
• at AC-3	
— at 400 V rated value	50 A
— at 500 V rated value	50 A
— at 690 V rated value	24 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	16 mm²
at 40 °C minimum permissible	25 mm²
Operating current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	24 A

• at 690 V rated value	20 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
<ul> <li>with 2 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	55 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
Operating current	
<ul> <li>at 1 current path at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	35 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	55 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
Operating power	
• at AC-1	

	— at 230 V rated value	26 kW
	— at 230 V at 60 °C rated value	23 kW
	— at 400 V rated value	46 kW
- at 690 V at 60 °C rated value 22 kW  • at AC-2 at 400 V rated value 22 kW  • at AC-3 — at 230 V rated value 15 kW  — at 400 V rated value 22 kW  — at 500 V rated value 30 kW  — at 690 V rated value 22 kW  Operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value 18.2 kW  Thermal short-time current limited to 10 s 420 A  Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum 500 1/h  • at AC-2 maximum 600 1/h  • at AC-2 maximum 800 1/h  • at AC-3 maximum 800 1/h  • at AC-4 maximum 250 1/h  Control supply voltage at AC  • at 50 Hz rated value 220 V  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz rated value 220 V  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz 150 Hz 0.851.1  Apparent pick-up power of magnet coil at AC  • at 50 Hz 150 Hz	— at 400 V at 60 °C rated value	39 kW
• at AC-2 at 400 V rated value • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 500 V rated value — at 500 V rated value — at 690 V rated value 22 kW  Operating power for approx. 200000 operating cycles at AC-4 • at 400 V rated value • at 690 V rated value 12.6 kW • at 690 V rated value 18.2 kW  Thermal short-time current limited to 10 s Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor No-load switching frequency • at AC Operating frequency • at AC-1 maximum • at AC-3 maximum • at AC-3 maximum • at AC-3 maximum • at AC-4 maximum • at AC-4 maximum  • at AC-4 maximum  • at AC-4 maximum  Control supply voltage at AC • at 50 Hz rated value 220 V Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz  Apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz	— at 690 V rated value	79 kW
• at AC-3  — at 230 V rated value — at 500 V rated value 22 kW  Operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value 12.6 kW • at 400 V rated value 18.2 kW  Thermal short-time current limited to 10 s Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency • at AC  Operating frequency • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-3 maximum • at AC-4 maximum • at AC-4 maximum • at AC-4 maximum 250 1/h  Control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value  220 V  Operating range factor control supply voltage rated value of magnet coil at AC • at 50 Hz • at 60 Hz  Apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz  Inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz	— at 690 V at 60 °C rated value	68 kW
- at 230 V rated value	• at AC-2 at 400 V rated value	22 kW
at 400 V rated value	• at AC-3	
at 500 V rated value	— at 230 V rated value	15 kW
— at 690 V rated value  Operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value  12.6 kW  18.2 kW  Thermal short-time current limited to 10 s  Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-4 maximum  • at 50 Hz rated value  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Alto Hz  Ones  10.69  • at 50 Hz  • at 60 Hz  Ones  10.69  • at 60 Hz  • at 60 Hz  Ones  10.69  • at 60 Hz  • at 60 Hz  • at 60 Hz  Ones  10.69  • at 60 Hz  • at 60 Hz  Ones  10.69  • at 60 Hz  Ones  10.69  0.65	— at 400 V rated value	22 kW
Operating power for approx. 200000 operating cycles at AC-4  • at 400 V rated value • at 690 V rated value 18.2 kW  Thermal short-time current limited to 10 s  Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency • at AC  Operating frequency • at AC-1 maximum • at AC-2 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value • at 60 Hz rated value • at 60 Hz • at 50 Hz • at 50 Hz • at 50 Hz • at 60 Hz	— at 500 V rated value	30 kW
at AC-4  • at 400 V rated value  • at 690 V rated value  18.2 kW  Thermal short-time current limited to 10 s  Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  • at AC-4 maximum  • at AC-4 maximum  • at AC-4 maximum  • at AC-5 maximum  • at AC-5 maximum  • at AC-6 maximum  • at AC-6 maximum  • at AC-7 maximum  • at AC-8 maximum  • at AC-9 maximum  • at AC-9 maximum  • at AC-1 maximum  • at AC-1 maximum  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-4 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  AC  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz	— at 690 V rated value	22 kW
• at 400 V rated value         • at 690 V rated value         18.2 kW  Thermal short-time current limited to 10 s  Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency         • at AC         5 000 1/h  Operating frequency         • at AC-1 maximum         • at AC-2 maximum         • at AC-3 maximum         • at AC-3 maximum         • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage Control supply voltage at AC         • at 50 Hz rated value         • at 60 Hz rated value         • at 60 Hz  Operating range factor control supply voltage rated value of magnet coil at AC         • at 50 Hz         • at 60 Hz  Apparent pick-up power of magnet coil at AC         • at 50 Hz         • at 60 Hz  Inductive power factor with closing power of the coil         • at 50 Hz         • at 60 Hz  Inductive power factor with closing power of the coil         • at 60 Hz         • at 60 Hz         • at 60 Hz		
a it 690 V rated value  Thermal short-time current limited to 10 s  Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency  at AC  at AC  Operating frequency  at AC-1 maximum  at AC-2 maximum  at AC-3 maximum  at AC-3 maximum  at AC-4 maximum  at AC-4 maximum  at AC-4 maximum  at AC-4 maximum  but AC-4 maximum  control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  at 50 Hz rated value  at 60 Hz  at 50 Hz  at 60 Hz  Apparent pick-up power of magnet coil at AC  at 50 Hz  at 60 Hz	at AC-4	
Thermal short-time current limited to 10 s Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  • at AC-5 maximum  • at AC-4 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  • at 60 Hz  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  O.69  • at 60 Hz	• at 400 V rated value	
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor  No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  • at 60 Hz  • at 60 Hz  Apparent pick-up power of magnet coll at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coll at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coll  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coll  • at 50 Hz  • at 60 Hz  • at 60 Hz  O.69  • at 60 Hz		
the operating current per conductor  No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  • at AC-4 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz  • at 50 Hz  • at 60 Hz  AC  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  O.69  • at 60 Hz  • at 60 Hz		
No-load switching frequency  • at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz  • at 50 Hz  • at 60 Hz  AC  O.8 1.1  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  O.69  O.65		4 W
• at AC  Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz  • at 50 Hz  • at 60 Hz  AC  Outhor of the control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 50 Hz  • at 60 Hz  Outhor of the coil  • at 60 Hz  Outhor of the coil of the coil of the coil  • at 60 Hz  Outhor of the coil of t		
Operating frequency  • at AC-1 maximum  • at AC-2 maximum  • at AC-3 maximum  • at AC-3 maximum  • at AC-4 maximum  • at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  O.69  • at 60 Hz  • at 60 Hz  O.65		5 000 1/h
at AC-1 maximum at AC-2 maximum at AC-3 maximum at AC-3 maximum at AC-4 maximum   Control circuit/ Control  Type of voltage of the control supply voltage AC  Control supply voltage at AC at 50 Hz rated value 220 V at 60 Hz rated value 220 V  Operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz  Apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz  Apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz  188 V-A  Inductive power factor with closing power of the coil at 50 Hz at 60 Hz  O.69 at 60 Hz		
<ul> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul> Control circuit/ Control Type of voltage of the control supply voltage <ul> <li>Control supply voltage at AC</li> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>220 V</li> </ul> Operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> Inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> Inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> 0.69 <ul> <li>at 60 Hz</li> </ul> 0.65		1 000 1/h
<ul> <li>at AC-3 maximum</li> <li>at AC-4 maximum</li> <li>250 1/h</li> </ul> Control circuit/ Control Type of voltage of the control supply voltage <ul> <li>AC</li> <li>Control supply voltage at AC</li> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>220 V</li> </ul> Operating range factor control supply voltage rated value of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> </ul> Apparent pick-up power of magnet coil at AC <ul> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> Inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> Inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> Inductive power factor with closing power of the coil <ul> <li>at 50 Hz</li> <li>at 60 Hz</li> </ul> 0.69 <ul> <li>at 60 Hz</li> </ul> 0.65	• at AC-2 maximum	600 1/h
at AC-4 maximum  Control circuit/ Control  Type of voltage of the control supply voltage  Control supply voltage at AC  at 50 Hz rated value  at 60 Hz rated value  220 V  Operating range factor control supply voltage rated value of magnet coil at AC  at 50 Hz  at 60 Hz  Apparent pick-up power of magnet coil at AC  at 50 Hz  at 50 Hz  at 60 Hz  Inductive power factor with closing power of the coil  at 50 Hz  at 50 Hz  at 60 Hz  Inductive power factor with closing power of the coil  at 50 Hz  at 50 Hz  at 50 Hz  at 60 Hz  O.69  at 60 Hz		800 1/h
Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  220 V  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  0.69  0.65	• at AC-4 maximum	250 1/h
Type of voltage of the control supply voltage  Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  220 V  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  0.69  0.65	Combal discoil Combal	
Control supply voltage at AC  • at 50 Hz rated value  • at 60 Hz rated value  220 V  Operating range factor control supply voltage rated value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  0.69  0.65		AC:
<ul> <li>at 50 Hz rated value</li> <li>at 60 Hz rated value</li> <li>220 V</li> <li>Operating range factor control supply voltage rated value of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>at 60 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>o.69</li> <li>at 60 Hz</li> <li>o.65</li> </ul>		7.0
at 60 Hz rated value  Operating range factor control supply voltage rated value of magnet coil at AC  at 50 Hz  at 60 Hz  O.8 1.1  Apparent pick-up power of magnet coil at AC  at 50 Hz  at 60 Hz  210 V·A  at 60 Hz  Inductive power factor with closing power of the coil  at 50 Hz  at 60 Hz  O.69  o.69  o.65		220 V
value of magnet coil at AC  • at 50 Hz  • at 60 Hz  Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  188 V·A  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  0.69  0.65		220 V
• at 50 Hz         • at 60 Hz         • at 60 Hz  Apparent pick-up power of magnet coil at AC         • at 50 Hz         • at 60 Hz  Inductive power factor with closing power of the coil         • at 50 Hz         • at 60 Hz  • at 60 Hz  0.8 1.1  0.85 1.1  188 V·A	Operating range factor control supply voltage rated	
<ul> <li>at 60 Hz</li> <li>Apparent pick-up power of magnet coil at AC</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>188 V·A</li> <li>Inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>0.69</li> <li>at 60 Hz</li> </ul>	value of magnet coil at AC	
Apparent pick-up power of magnet coil at AC  • at 50 Hz  • at 60 Hz  Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  0.69  • at 60 Hz	● at 50 Hz	0.8 1.1
• at 50 Hz         • at 60 Hz         • at 60 Hz  Inductive power factor with closing power of the coil         • at 50 Hz         • at 60 Hz          • at 60 Hz          • at 60 Hz          • at 60 Hz          • at 60 Hz	● at 60 Hz	0.85 1.1
<ul> <li>at 60 Hz</li> <li>Inductive power factor with closing power of the coil</li> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>0.69</li> <li>at 60 Hz</li> <li>0.65</li> </ul>	Apparent pick-up power of magnet coil at AC	
Inductive power factor with closing power of the coil  • at 50 Hz  • at 60 Hz  0.69  0.65	● at 50 Hz	
<ul> <li>at 50 Hz</li> <li>at 60 Hz</li> <li>0.69</li> <li>0.65</li> </ul>		188 V·A
• at 60 Hz 0.65		
	● at 50 Hz	
Apparent holding power of magnet coil at AC		0.65
	Apparent holding power of magnet coil at AC	

● at 50 Hz	17.2 V·A
● at 60 Hz	16.5 V·A
Inductive power factor with the holding power of the coil	
● at 50 Hz	0.36
● at 60 Hz	0.39
Closing delay	
• at AC	10 80 ms
Opening delay	
• at AC	10 18 ms
Arcing time	10 20 ms
Control version of the switch operating mechanism	Standard A1 - A2

Auxiliary circuit	
Number of NC contacts	
<ul> <li>for auxiliary contacts</li> </ul>	
<ul> <li>instantaneous contact</li> </ul>	1
Number of NO contacts	
<ul> <li>for auxiliary contacts</li> </ul>	
<ul> <li>instantaneous contact</li> </ul>	1
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
● at 230 V rated value	10 A
• at 400 V rated value	3 A
● at 500 V rated value	2 A
● at 690 V rated value	1 A
Operating current at DC-12	
● at 24 V rated value	10 A
● at 48 V rated value	6 A
● at 60 V rated value	6 A
● at 110 V rated value	3 A
● at 125 V rated value	2 A
● at 220 V rated value	1 A
● at 600 V rated value	0.15 A
Operating current at DC-13	
● at 24 V rated value	10 A
● at 48 V rated value	2 A
• at 60 V rated value	2 A
● at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	52 A
• at 600 V rated value	52 A
Yielded mechanical performance [hp]	
<ul><li>for single-phase AC motor</li></ul>	
— at 110/120 V rated value	3 hp
— at 230 V rated value	10 hp
• for three-phase AC motor	
— at 200/208 V rated value	15 hp
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	40 hp
— at 575/600 V rated value	50 hp
Contact rating of auxiliary contacts according to UL	A600 / P600

### Short-circuit protection

#### Design of the fuse link

• for short-circuit protection of the main circuit

— with type of coordination 1 required

— with type of assignment 2 required

• for short-circuit protection of the auxiliary switch required

gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 80 A

fuse gG: 10 A

Installation/ mounting/ dimensions	
Mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
<ul> <li>Side-by-side mounting</li> </ul>	Yes
Height	114 mm
Width	55 mm
Depth	130 mm
Required spacing	
<ul><li>with side-by-side mounting</li></ul>	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— Backwards	0 mm

— upwards	50 mm
— at the side	6 mm
— downwards	50 mm
• for live parts	
— forwards	10 mm
— Backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	6 mm

Connections/Terminals	
Type of electrical connection	
• for main current circuit	screw-type terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals
Type of connectable conductor cross-sections	
• for main contacts	
<ul><li>— single or multi-stranded</li></ul>	2x (1 35 mm²), 1x (1 50 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 25 mm²), 1x (1 35 mm²)
<ul> <li>at AWG conductors for main contacts</li> </ul>	2x (18 2), 1x (18 1)
Type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
<ul><li>— single or multi-stranded</li></ul>	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)

1 000 000
40 %
73 %
Yes
No
20 y
finger-safe when touched vertically from front acc. to IEC 60529

## Certificates/approvals

#### **General Product Approval**



Declaration of Conformity









Type Examination
Certificate



#### **Test Certificates**

#### Marine / Shipping

Type Test
Certificates/Test
Report

Special Test Certificate









GL

LRS

#### Marine / Shipping











Confirmation

#### Further informatior

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2036-1AN20


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2036-1AN20


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-1AN20

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2036-1AN20&lang=en

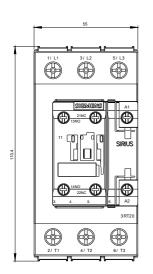

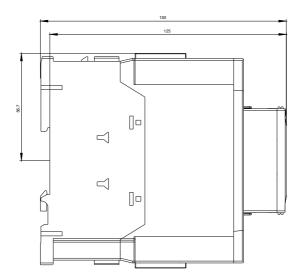

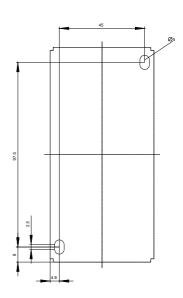

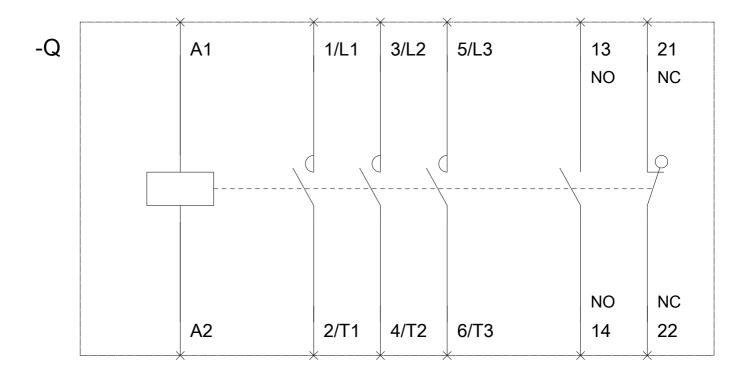

last modified: 10/13/2017