

withdrawable circuit breaker with guide frame 4-pole, size I, IEC In=1600A to 690V, AC50/60Hz Icu=66kA at 500V rear connection horizontal Overcurrent release ETU 27 LSING protection adjustable 0.4-1 in Ground fault/N protection integrated Motorized/manual operating mechanism with spring charging motor AC 50/60 Hz 208-240 V or 220-250 V DC Activation AC 50/60 Hz 230 V, 220 V DC With 1st auxiliary release Shunt release "F", F1 50/60 Hz 230 V AC/220 V DC, 100% on-load factor without 2nd auxiliary release 4NO+4NC C01= Mechanical switching cycle counter C20= Spring charge status indicator not possible with option F02 F23= Internal current transformers 4-pole switch BGI K07= Tripped signaling contact, 1 CO not possible with option F02 R16= Position signaling switch, withdrawable part 6 changeover contacts R21= Shutter 2-part can be locked with bracket lock S33= Castell/Fortress Tension lever T40= Door sealing frame

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1116-3DG46-4GA4-Z C01+C20+F23+K07+R16+R21+S33+T40>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1116-3DG46-4GA4-Z C01+C20+F23+K07+R16+R21+S33+T40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1116-3DG46-4GA4-Z C01+C20+F23+K07+R16+R21+S33+T40


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

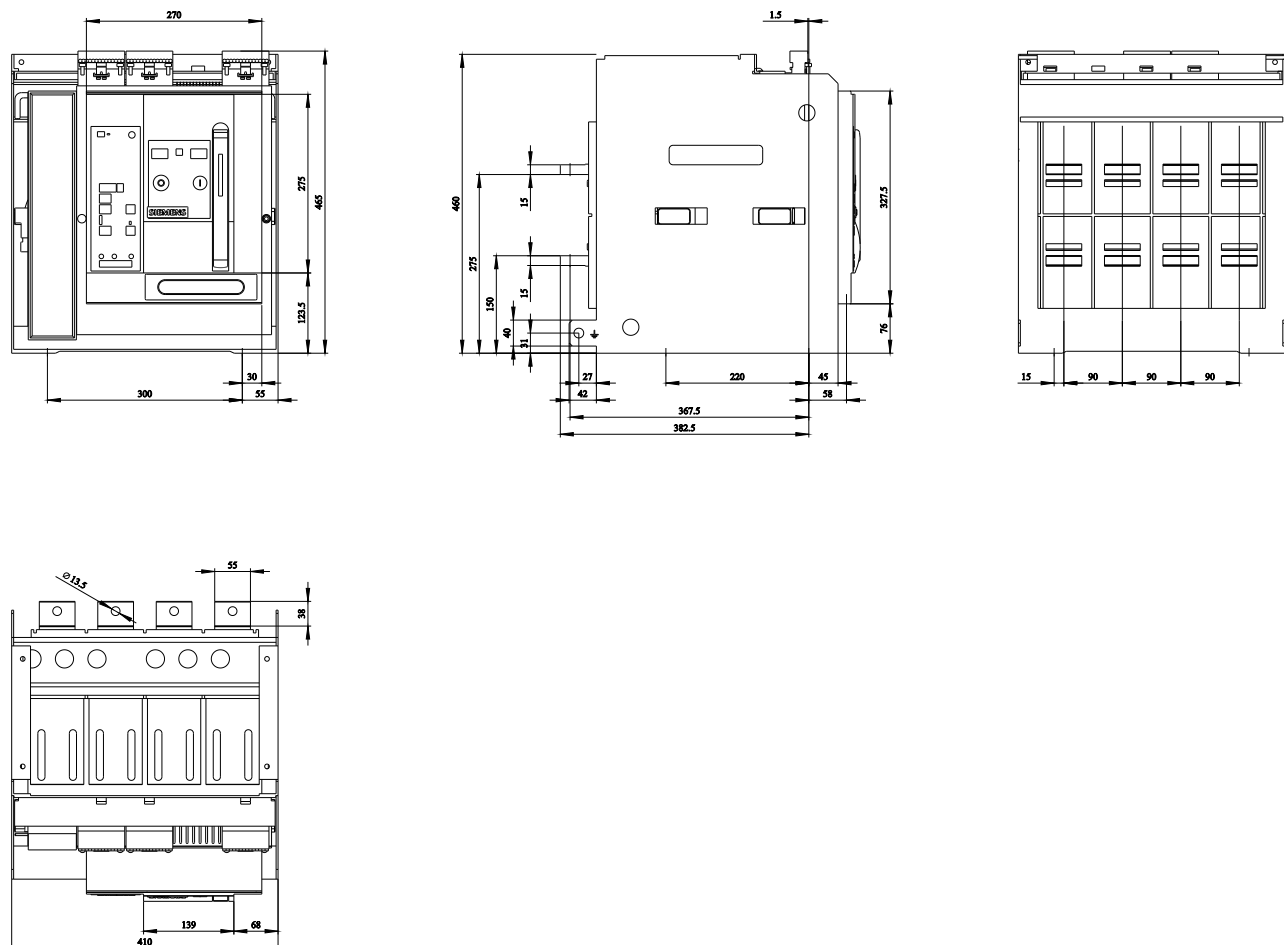

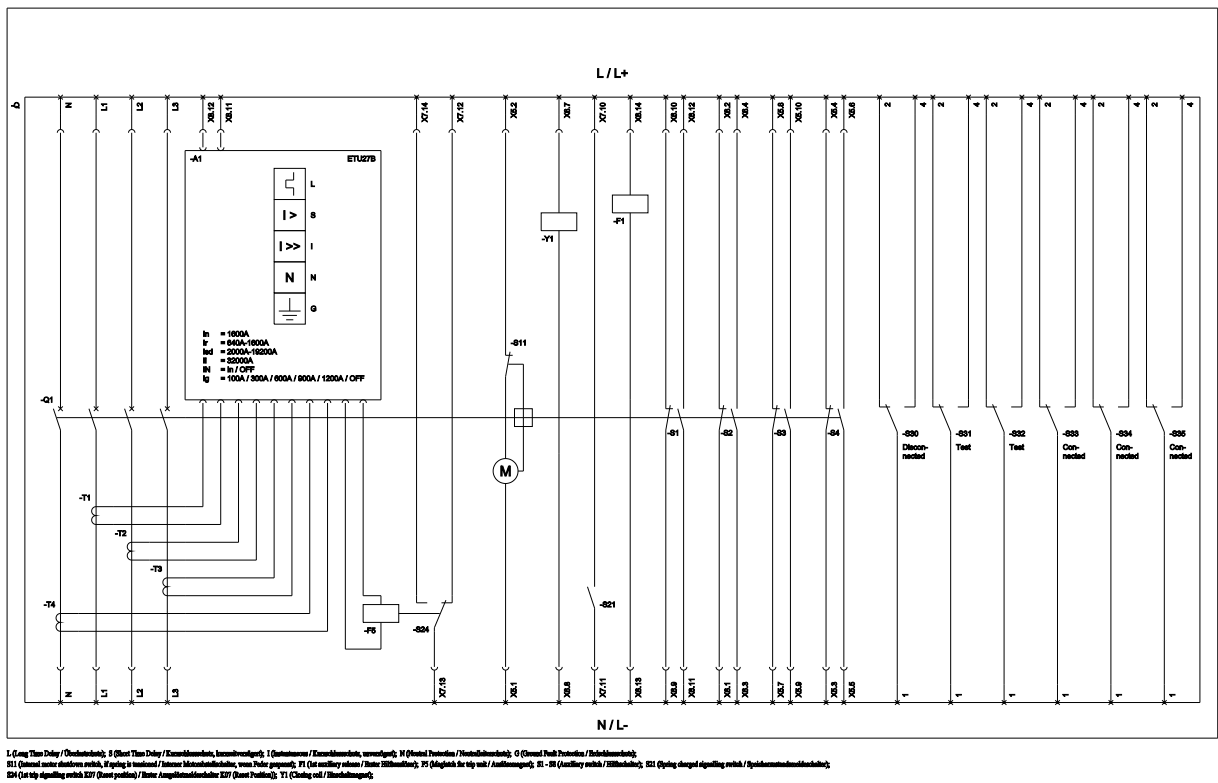

last modified:

3/14/2024

