



RELAY,N-TYPE W 2 CHANGE OV.CONT. CONTACT FOR AC 230V 16A CONTROL AC 24V

Similar to image

**Technical data:**

<b>Mounting depth</b>	mm	90
<b>Number of NC contacts</b>		0
<b>Type of mounting</b>		DIN rail
<b>Number of change-over switches</b>		2
<b>Number of NO contacts</b>		0
<b>Number of pitch units for width</b>		1
<b>Type of voltage</b>		
• of control voltage_1		AC
<b>Switching capacity apparent power</b>		
• for uncorrected fluorescent lamp load	V·A	400
<b>Switching capacity real power / for filament lamp load</b>	W	1,200
<b>Switching capacity current / at cos phi 0.6</b>	A	16
<b>Operating current / rated value</b>	A	16
<b>Control voltage frequency</b>		
• _1		
• initial value	Hz	50
• final value	Hz	50
<b>Control voltage/ _1</b>		

• final value		
• initial value	V	24
•	V	24
<b>Type of voltage / of supply voltage</b>		AC
<b>Relay design</b>		partially electronic
<b>Supply voltage / maximum</b>	V	400
<b>Supply voltage / minimum</b>	V	400

#### Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 CCC	 GOST	 VDE
	 EG-Konf.	<a href="#">Environmental Confirmations</a>

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT4207-2/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT4207-2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4207-2)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

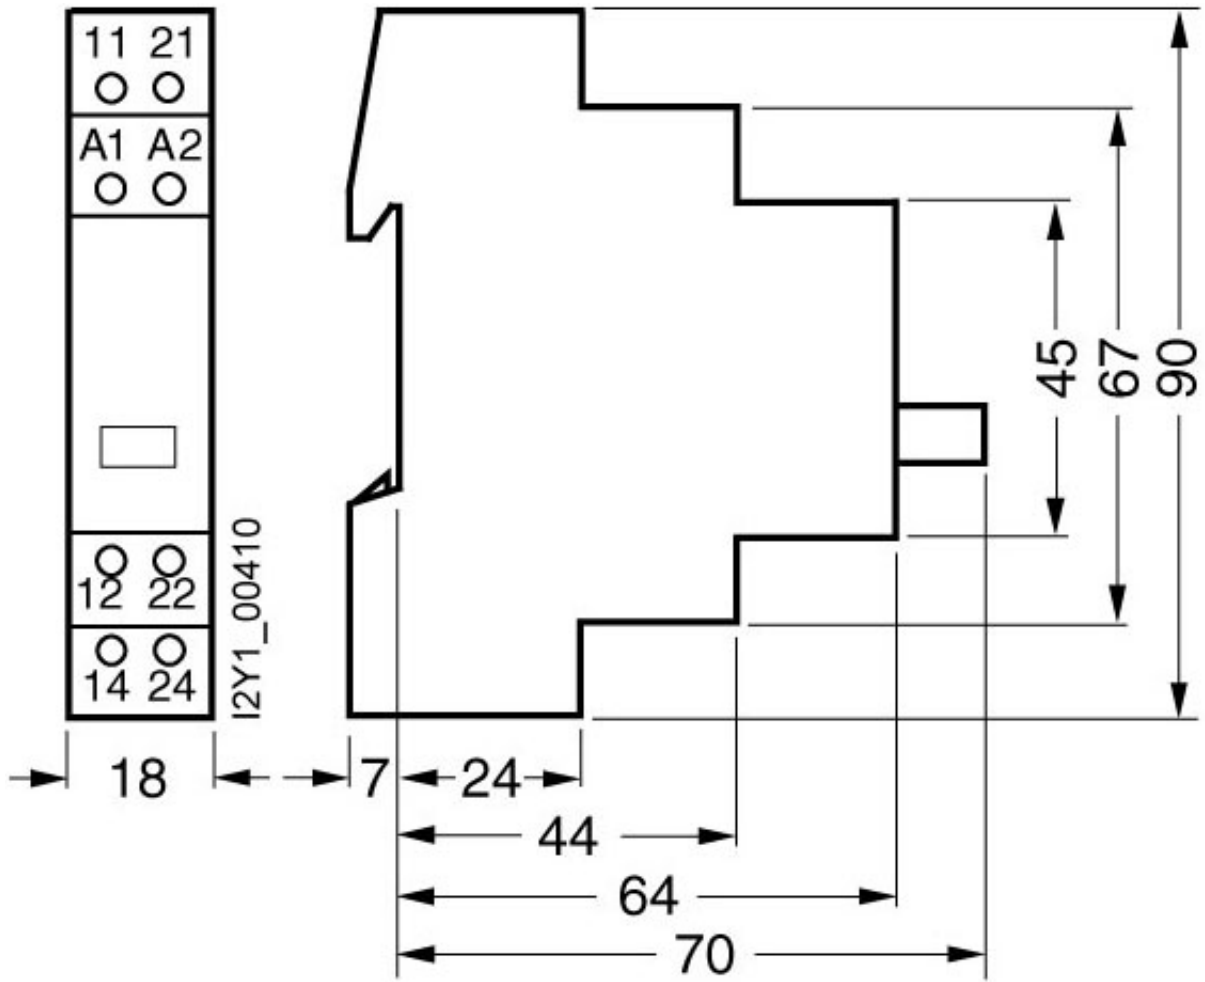

last change:

Dec 14, 2012