

SCM/SDI P CC

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

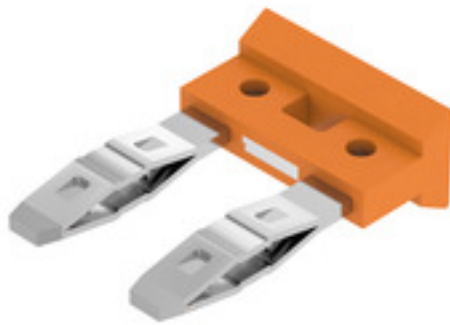

Cross-connection for the sockets in the D-SERIES DRM.

General ordering data

Version	D-SERIES, Cross-connector
Order No.	7760056366
Type	SCM/SDI P CC
GTIN (EAN)	6944169773327
Qty.	10 pc(s).

SCM/SDI P CC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	18.2 mm	Depth (inches)	0.717 inch
Height	5.7 mm	Height (inches)	0.224 inch
Net weight	1 g	Width	12.1 mm
Width (inches)	0.476 inch		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Cross-connection data

Rated voltage	250 V	Rated current	2 A
Insulation	Yes	Touch-safe protection	Yes
Colour	orange	Number of cross-connected terminals	2
Number of poles	2	Pitch in mm (P)	8 mm
Type of mounting	Plugged	Version	for D-SERIES sockets with PUSH IN connection

General data

Version	for D-SERIES sockets with PUSH IN connection	Colour	orange
---------	--	--------	--------

Insulation coordination

Rated voltage	250 V
---------------	-------

Connection data

Pitch in mm (P)	8 mm
-----------------	------

Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ECLASS 9.1	27-37-16-92	ECLASS 10.0	27-37-16-92
ECLASS 11.0	27-37-16-92		

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Brochure/Catalogue	Catalogues in PDF-format


SCM/SDI P CC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings


Dimensional drawing

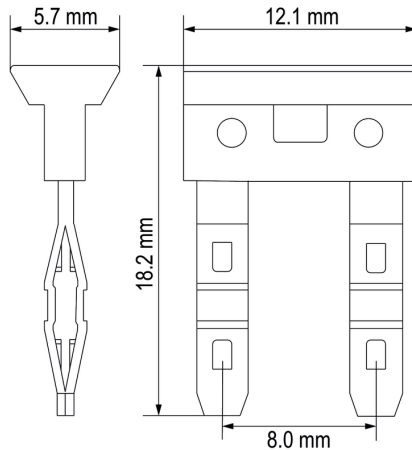

Example of use

How to install cross connection


to cross connect A2 contacts of SDI... PUSH IN sockets

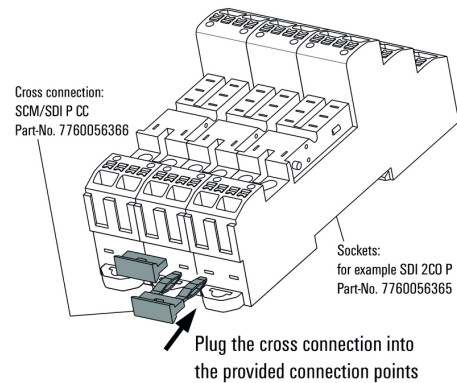

Example of use

How to install cross connection

to cross connect A2 contacts of SCM... PUSH IN sockets

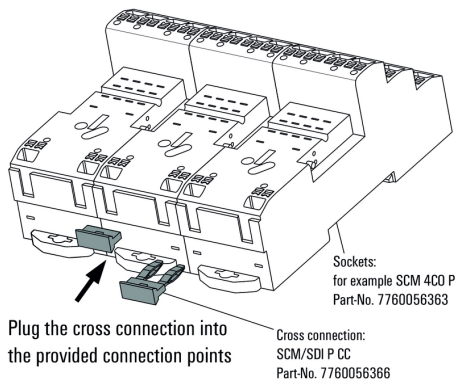

How to install cross connection

to cross connect A2 contacts of SCM... PUSH IN sockets

Example of use

Cross connection

between SDI... and SCM... PUSH IN sockets is possible

