

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image, Similar to illustration



The ACT20X-SAI-HAO/2SAI-2HAO current output isolators are suitable for controlling field devices in Ex areas, up to Zone 0.

The input/output-side HART protocol transparent signal connection is implemented using 4 to 20 mA current loops.

Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases system availability.

The rail-mounted current output isolators are optionally available in one- or two-channel versions.

With 11 mm width per channel, the devices need little space in the electrical cabinet.

General ordering data

Version	EX signal isolating converter, Safe-input: 4-20mA, Ex output: 4 - 20 mA, 2-channel
Order No.	8965460000
Type	ACT20X-2SAI-2HAO-S
GTIN (EAN)	4032248785070
Qty.	1 pc(s).

Creation date March 30, 2021 12:04:17 AM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	113.6 mm	Depth (inches)	4.472 inch
Height	119.2 mm	Height (inches)	4.693 inch
Net weight	212 g	Width	22.5 mm
Width (inches)	0.886 inch		

Temperatures

Storage temperature	-20 °C...85 °C	Operating temperature	-20 °C...60 °C
Humidity	0...95 % (no condensation)		

Probability of failure

SIL PAPER	SIL certificate	MTBF	135 Years
-----------	-----------------	------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input EX

Input current	4...20mA	Input frequency	0,5...2,5 kHz @ 3,5...23 mA bi-directional HART [®] signal
Output signal in case of wire break	< 1 mA	Voltage drop	< 2 V
Voltage drop not powered	< 6 V	Voltage drop powered	< 2 V

Input

Input current	4...20mA	Input frequency	0,5...2,5 kHz @ 3,5...23 mA bi-directional HART [®] signal
Voltage drop	< 2 V		

Output

2-wire supply	> 14.5 V @ 20 mA	Cut-off frequency (-3 dB)	0.5...2.5 kHz @ 3.5...23 mA bi-directional HART [®] signal
Influence of load resistance	≤ 0.01% of span / 100 Ω	Load impedance current	≤ 725 Ω
Output current	4...20 mA (max. 23 mA)	Output signal limit	< 28 mA
Residual ripple (current loop)	< 7.5 mV _{eff}	Type	intrinsically safe circuit

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Alarm output

Alarm function	Signal limit exceeded, Line interruption at the input, No supply voltage, Device error	Continuous current	≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (zone 2)
Hysteresis	0.1 mA (switching threshold)	Nominal switching voltage	≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (zone 2)
Power rating	≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2)	Switching thresholds	0...29.9 mA (programmable)
Type	Status relay, 1 NC (voltage-free)		

General specifications

Accuracy	< 0.1% span	Configuration	With FDT/DTM software
Humidity	0...95 % (no condensation)	Power consumption	≤ 1.8 W
Protection degree	IP20	Step response time	≤ 5 ms
Temperature coefficient	< 0.01% of span/°C (TU)	Type of connection	Screw connection
Voltage supply	19.2...31.2 V DC		

Insulation coordination

EMC standards	DIN EN 61326, NE 21	Insulation voltage	2.6 kV (input / output)
Rated voltage	300 V		

Data for Ex applications (ATEX)

Current I ₀	93 mA	Installation location	Device installed in safe area, zone 2
Marking	II (1) G [Ex ia Ga] IIC/IIB/ IIA, II (1) D [Ex ia Da] IIIC, I (M1) [Ex ia Ma] I	Power P ₀	< 650 mW
Voltage U ₀	28 V DC		

Safety-related basic specifications

Demand mode	High	Description of the "safe state"	analogue Output ≤ 3.6 mA or output ≥ 21 mA
Device type	A	Hardware fault tolerance (HFT)	0
Mean Time To Repair (MTTR)	24 h	Probability of outage PFH	4.8 x 10 ⁻⁸ h ⁻¹
Safe Failure Fraction (SFF)	85 %	Safety category	SIL 2
T _{proof}	5 Years	Total failure rate for dangerous detected failures (λ _{DD})	127 FIT
Total failure rate for dangerous undetected failures (λ _{DU})	48 FIT	Total failure rate for safe detected failures (λ _{SD})	0 FIT
Total failure rate for safe undetected failures (λ _{SU})	164 FIT		

Safety-related specifications Low demand mode

Average Probability of Failure on Demand (PFD _{avg})	2.29 x 10 ⁻⁴ (T _{proof} = 1 year), 4.37 x 10 ⁻⁴ (T _{proof} = 2 years), 1.06 x 10 ⁻⁴ (T _{proof} = 5 year)
--	--

Creation date March 30, 2021 12:04:17 AM CEST

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.25 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Classifications

ETIM 6.0	EC002475	ETIM 7.0	EC002475
ECLASS 9.0	27-21-01-23	ECLASS 9.1	27-21-01-23
ECLASS 10.0	27-21-01-23	ECLASS 11.0	27-21-01-23

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Tender specification sheets

Long specification

Short specification

Ex output isolation amplifier for standard DC current signals, 2-channel, HART transparent 2-channel output isolation amplifier in 22.5 mm width with external power supply, for transmitting and isolating standard signals 4 to 20 mA from the safe zone to Ex zones 0,1,2.

Status-/ error messages are available via a relay contact (NO).

The component can be configured using standard FDT/DTM software.

Add-on housing for TS35 rail mounting

Dimensions: L/W/H

119.2/ 22.5/ 113.6

Screw connection/

Nominal cross-section

2.5 mm²

Protection degree: IP

20

Input 2 x

4...20 mA

Output

x 4...20 mA

Load <

600 Ohm Kanal

Accuracy < 0,1

% v.E

Temperature

coefficient < 0,01%

v.E./°C (Tu)

Alarm output relay 1

NO contact

250

V AC / 30 V DC @ 2A

safe zone

32 V

AC @ 0.5 A/ 32 VDC @ 1

A Zone 2

Auxiliary

power

19...31.2 V DC

Power loss approx. 3 W

Ambient

temperature range -20

°C...+60 °C

Secure

isolation EN

61010, 3-way isolation

up to 2.6 kV AC/DC of

all circuits against each

other

Working

voltage

300 V AC/DC at

Overvoltage Category II

and pollution degree 2

Approvals cULus, ATEX

CE, Ex, FM

ATEX marking II 3 G

Ex A, Ex C, Ex D

2

Ex output isolation amplifier for standard DC current signals, 2-channel, HART transparent 2-channel output isolation amplifier in 22.5 mm width with external power supply,

Creation date March 30, 2021 12:04:17 AM Page 5 of 5

Catalogue status 12.03.2021 / Weidmüller reserves the right to make technical changes.

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Important note

Product information Weidmüller provides an extended guarantee period of 36 months for this device.

Approvals

Approvals



Approvals	DNVGL;
ROHS	Conform
UL File Number Search	E337701

Downloads

Approval/Certificate/Document of Conformity	Certification SIL Certification DNV GL Certification ATEX Certification IECEX Certification UL Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD
Software	WI-Manager, DTM-Library for online installation V.1.2.2
User Documentation	Instruction sheet Safety Manual for SIL application Handbuch ACT20X- Serie, deutsch Manual ACT20X- series, english


ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG
 Klängenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings



Application

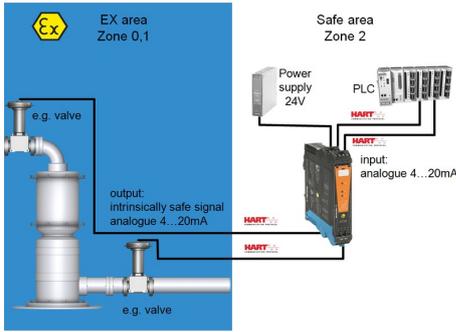


Block diagram

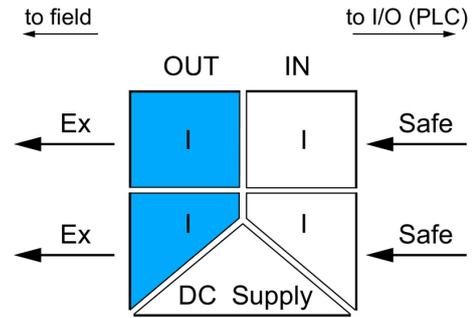

Dimensioned drawing

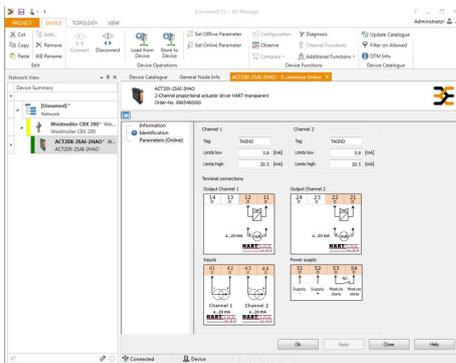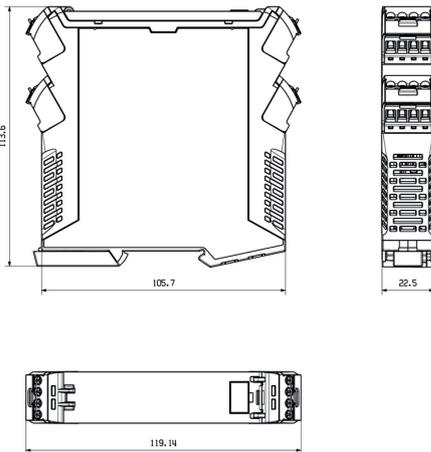

screenshot of configuration with FDT2 / DTM software

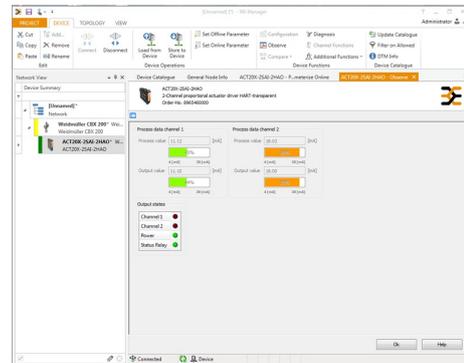


screenshot of "observe" with FDT2 / DTM software

ACT20X-2SAI-2HAO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

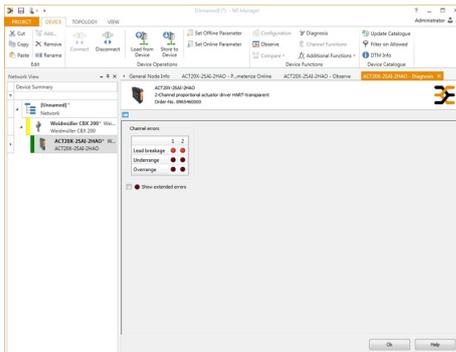

screenshot of "diagnosis" with FDT2 / DTM software

Connection diagram

