


AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI 4DO-Y IP67

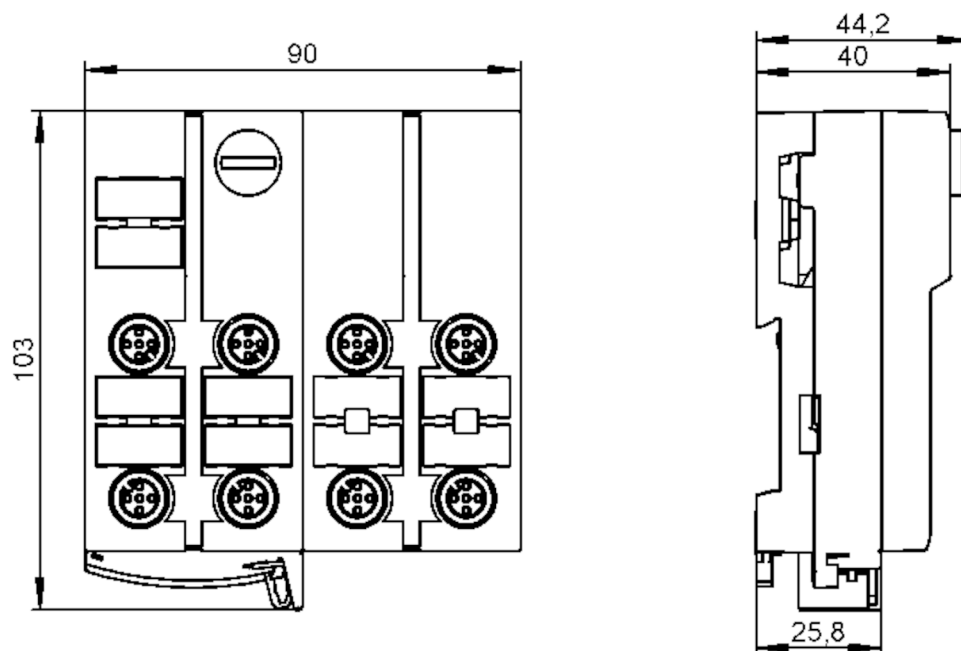

Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current consumption from AS-i	[mA]	250
Max. current load total	[A]	2
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
------------------------------	---

Inputs

Number of digital inputs		4
Input circuit of digital inputs		PNP
voltage supply	[V]	18...30; (via flat cable)
Max. total current rating of inputs	[mA]	200
Input current High	[mA]	6...10
Input current Low	[mA]	0...2
Min. switching level high signal	[V]	11
Digital inputs protected against short circuits		yes
Sensor supply of the inputs		AS-i

ClassicLine 4DI 4DO-Y IP67


ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — EN-GB — AC5209-01 — 02.02.2007



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI 4DO-Y IP67

Remarks	
Remarks	Inputs and outputs must be electrically isolated.
	Do not connect any of the following points to an external potential:
	I-, I+, I1, I2, I3, I4
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.
Electrical connection	
quick mounting technology for AS-i flat cable: ; three orientations possible	
Electrical connection - Outputs	
Connection	

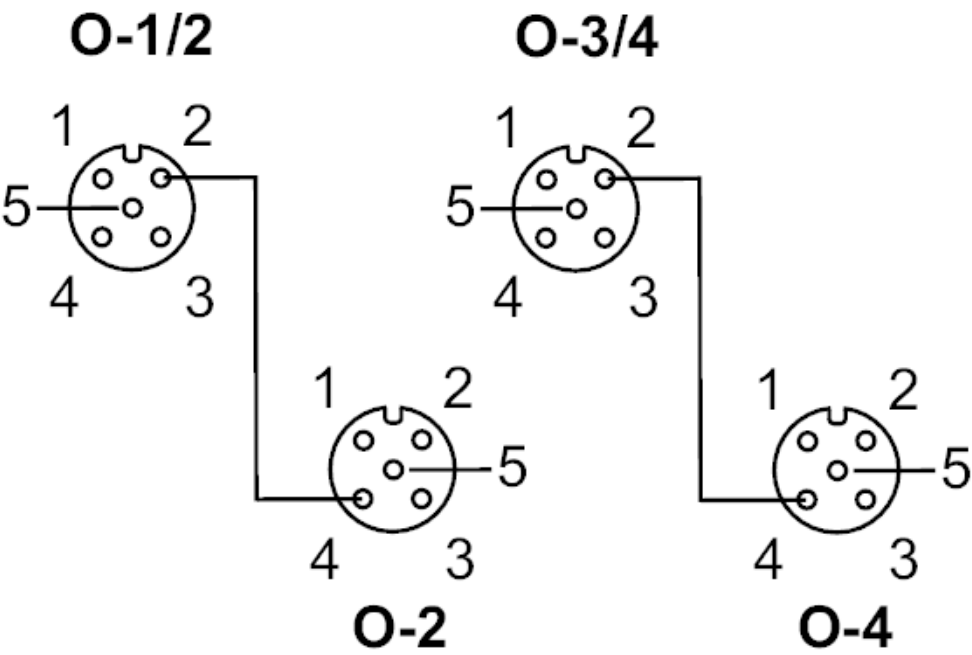



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI 4DO-Y IP67

Outputs	
socket O-1/2	
1	not used
2	switching output 2
3	external voltage AUX -
4	switching output 1
5	not used
socket O-2	
1	not used
2	not used
3	external voltage AUX -
4	switching output 2
5	not used
socket O-3/4	
1	not used
2	switching output 4
3	external voltage AUX -
4	switching output 3
5	not used
socket O-4	
1	not used
2	not used
3	external voltage AUX -
4	switching output 4

Connector: M12

Electrical connection - Inputs

Inputs	
1	Sensor supply L+
2+4	data input internally bridged
3	Sensor supply L-
5	not used

Connector: M12

