BRS364H031FCA

3-phase stepper motor - 0.51 Nm - shaft Ø6.35 mm - L=42 mm - with brake -con.





Main

Range compatibility	Lexium SD3
Product or component type	Motion control motor
Device short name	BRS3
Maximum mechanical speed	3000 rpm
Motor type	3-phase stepper motor
Number of motor poles	6
Supply voltage limits	48 V DC 34 V DC
Mounting support	Flange
Motor flange size	57.2 mm
Length	120 mm
Centring collar diameter	38 mm

Complementary

Complementary	
Centring collar depth	1.6 mm
Number of mounting holes	4
Mounting holes diameter	5.2 mm
Circle diameter of the mounting holes	66.6 mm
Electrical connection	Connector
Feedback type	Single turn encoder
Speed feedback resolution	10000 points/turn
Holding brake	With
Shaft end	Smooth shaft
Second shaft	Without second shaft end
Shaft diameter	6.35 mm
Shaft length	21 mm
Nominal torque	0.45 N.m
Holding torque	0.51 N.m
Rotor inertia	0.1 kg.cm ²
Resolution	200, 400, 500, 1000, 2000, 4000, 5000, 10000 steps number of full steps per revolution 1.8 °, 0.9 °, 0.72 °, 0.36 °, 0.18 °, 0.09 °, 0.072 °, 0.036 ° step angle
Accuracy error	+/- 6 arc min
Maximum starting frequency	8.5 kHz
[In] rated current	5.2 A
Resistance	0.42 Ohm (winding)
Time constant	2.1 ms
Maximum radial force Fr	24 N (first shaft end) 25 N (second shaft end)
Maximum axial force Fa	8.4 N (force pressure) 100 N (tensile force)
Service life in hours	20000 h (bearing)
Brake pull-in power	8 W
Angular acceleration	200000 rad/s²
Product weight	1.3 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not interested for a set of or determining suitability or intelability of these products for specific user applications. It is the documentation is not integrator to perform the appropriate and complete risk analysis, evaluating of the products with respect to the relevant specific application or use thereof. Neither Schmeider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Standards	EN 50347 IEC 60072-1
Type of cooling	Natural convection
Ambient air temperature for operation	-2540 °C
Ambient air temperature for storage	-2570 °C
Operating altitude	<= 1000 m without power derating
Relative humidity	1585 % without condensation
Vibration resistance	A conforming to EN/IEC 60034-14 20 m/s² maximum
IP degree of protection	IP41 for shaft bushing without shaft seal ring conforming to EN/IEC 60034-5 IP56 for total except shaft bushing conforming to EN/IEC 60034-5
Temperature class	F class winding conforming to IEC/EN 60034-1

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0623 - Schneider Electric declaration of conformity
REACh	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations




Product data sheet Dimensions Drawings

BRS364H031FCA

Dimensions

3-Phase Stepper Motor in Connector Version


_mm

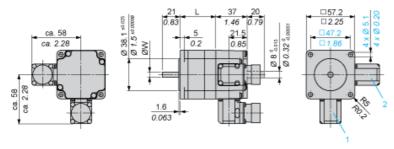

- 1: Plug connection encoder (optional) 12 poles
- 2: Plug connection motor 6 poles

Holding Brake

in.

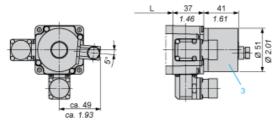

3: Holding brake (optional)

Dimensions in mm


L	Shaft diameter ØW
42 ±0.5	6.35 ±0.013

Dimensions in in.

L	Shaft diameter ØW
1.65 ±0.020	0.25 ±0.00051


BRS364H031FCA

Wiring Diagram of Holding Brake



The connector is part of the scope of delivery. Connector designation: Hirschmann type G4 A 5M

Wiring Diagram of Encoder Plug on BRS3.

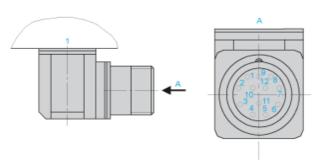


1: Motor housing

Pin	Designation
1	A
2	A negated
3	В
4	B negated
5	C, I
6	C negated, I negated
7	5 V _{GND}
8	+ 5
9	-SENSE
10	+SENSE
11	Temperature sensor
12	Not connected

BRS364H031FCA

Torque Characteristics

Measurement at 1000 Steps/Revolution, Nominal Voltage DC Bus U_N and Phase Current I_N

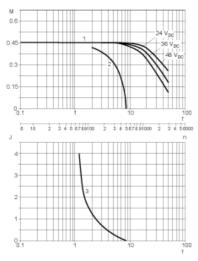

M: Torque in Nm
n: Speed in rpm
f: Frequency in kHz
J: Rotor inertia in kg.cm²
1: Pull-out torque
2: Pull-in torque
3: Maximum load inertia