## **SIEMENS**

Data sheet LZS:RT4B4S15



Plug-in relay complete unit 2 W, 115 V AC LED module red Socket with logic isolation screw terminal

product brand name	SIRIUS
product designation	Coupling relay with plug-in relay
product type designation	LZS
General technical data	
display version LED	Yes
percental drop-out voltage related to the input voltage	15 %
protection class IP	IP20
operating frequency without load	36 000 1/h
operating frequency with load	360 1/h
switching behavior	monostable
design of the switching function	changeover switch
design of the switching function positively driven	No
mechanical service life (switching cycles) typical	5 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical	80 000
thermal current	8 A
reference code acc. to IEC 81346-2	K
Substance Prohibitance (Date)	01.05.2012
Control circuit/ Control	
control supply voltage at AC	
<ul> <li>at 50 Hz rated value</li> </ul>	115 V
at 60 Hz rated value	115 V
control supply voltage frequency	
• 1 rated value	50 Hz
2 rated value	60 Hz
supply voltage frequency for auxiliary and control circuit rated value	50 60 Hz
operating range factor control supply voltage rated value at AC at 50 Hz	
initial value	0.9
full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.9
full-scale value	1.1
design of the relay operating mechanism	poled
product component plug-in socket	Yes
design of the snap-on socket base	Socket with logic isolation
Short-circuit protection	
design of the fuse link for short-circuit protection of the	fuse gG: 10 A

Changeover contact  AgNi 90/10  0  0  2  AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5 1x (18 14), 2x 18, 2x 16, 2x 14
AgNi 90/10 0 0 2  AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
AgNi 90/10 0 0 2  AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
0 0 2  AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
0 2  AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
AC  LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
LED red  No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
No screw-type terminals  1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
1x (1,0 2,5), 2x 1,0, 2x 1,5, 2x 2,5 1x (1.0 1.5), 2x 1.0, 2x 1.5
1x (1.0 1.5), 2x 1.0, 2x 1.5
1x (1.0 1.5), 2x 1.0, 2x 1.5
(,,,
1 2.5 mm²
1 1.5 mm²
1 1.0 mm
18 14
0.5 0.7 N·m
any
snap-on mounting
77 mm
15.5 mm
71 mm
7 1 111111
0 mm
0 mm
0 mm
-40 +70 °C
-20 +70 °C
-20 +70 °C
20 170 0
of Conformity other







## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:RT4B4S15

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:RT4B4S15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/LZS:RT4B4S15


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=LZS:RT4B4S15&lang=en

**Characteristic: Derating** 

https://support.industry.siemens.com/cs/ww/en/ps/LZS:RT4B4S15/manual

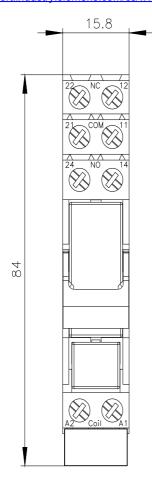

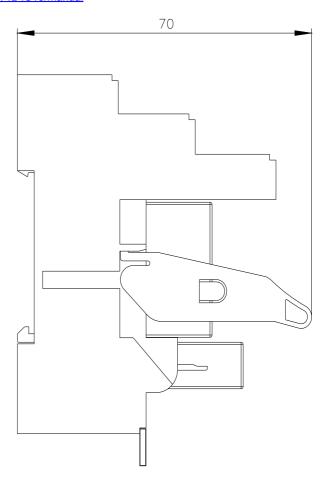

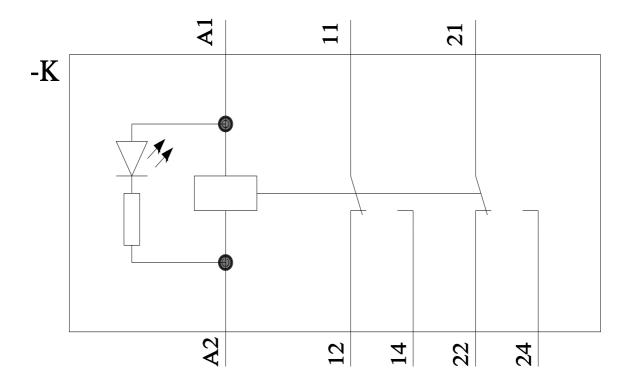

last modified: 10/13/2021 🖸