


O8E204



Through-beam sensor receiver

O8E-DPKG/IO-Link/0,30M/AS/4P

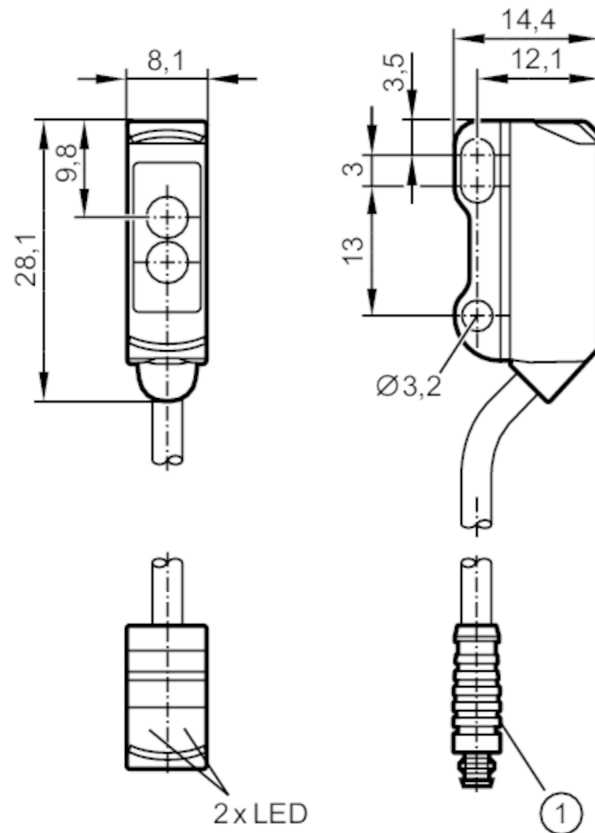

1 receiver in upper lens
illustration (example)



Application

Function principle

Through-beam sensor

Electrical data

Operating voltage [V]

10...30 DC

Current consumption [mA]

15; ((24 V))

Protection class

III

Reverse polarity protection

yes

Type of light

red light

Wave length [nm]

633



Through-beam sensor receiver

O8E-DPKG/IO-Link/0,30M/AS/4P

Outputs		
Electrical design	PNP	
Output function	dark-on mode	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	100	
Switching frequency DC [Hz]	1000	
Short-circuit protection	yes	
Type of short-circuit protection	pulsed	
Detection zone		
Transmitter / receiver	receiver	
Range [m]	< 3	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38.4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
IO-Link device ID	787 d / 00 03 13 h	
Profiles	Smart Sensor: Device Identification; Device Diagnosis; Teach Channel; Binary Data Channel	
SIO mode	yes	
Required master port type	A	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
MTTF [years]	1152	
Mechanical data		
Weight [g]	23	
Housing	rectangular	
Dimensions [mm]	28.1 x 8.1 x 14.4	
Materials	housing: ABS; stainless steel (1.4404 / 316L)	
Lens material	PMMA	
Lens alignment	side lens	
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
Remarks		
Pack quantity	1 pcs.	

Through-beam sensor receiver

O8E-DPKG/IO-Link/0,30M/AS/4P


Electrical connection

Cable: 0.3 m, PVC, black, Ø 2.9 mm; 3 x 0.08 mm²

Connector: 1 x M8




Connection

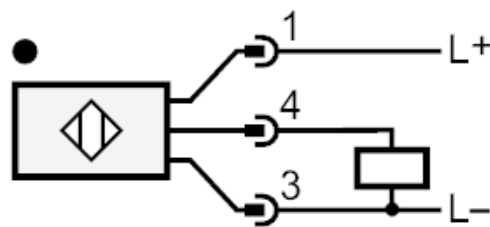

Diagrams and graphs

excess gain graph

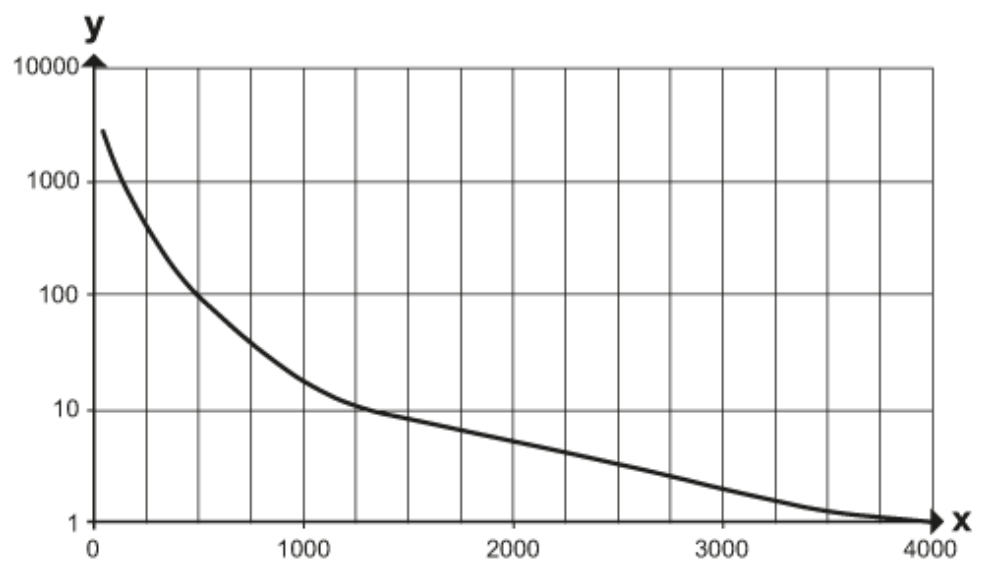

x: Abstand [mm]

y: Funktionsreservefaktor