
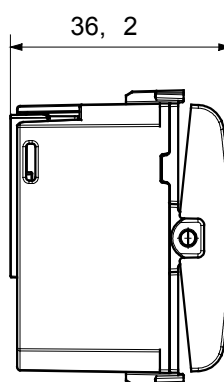


The 4-channel KNX pushbutton panel is a flush-mounted device designed to control functions on KNX systems. Each channel can be configured individually or in combination for functions such as on/off, dimming, shutter control, scene management, priority and timed commands. It is compatible with 1- or 2-module pushbuttons, tilt or fixed. One rocker button allows control of two channels, which can be configured independently or combined. Each channel has a built-in RGB LED for nighttime localization and status indication of the controlled load. The module can be installed in standard flush-mounting boxes and mounts in Chorus series holders, occupying the space of two modules.

Communication	KNX	No. DIN modules	2
Power supply	Via KNX BUS, 29V DC SELV	Interfaces	KNX TP1
Current absorbed by KNX bus (mA)	Max 7 mA	No. output channels	4
Connection to the KNX bus	KNX bus terminal	Working temperature	-5 ÷ +45 °C
Stocking temperature	-25 ÷ +55 °C	IP degree	IP20
Standard	Low Voltage Directive 2014/35/EU Electromagnetic Compatibility Directive 2014/30/EU, EN 50491, EN 60669-2-5	Colour	Glossy white

DIMENSIONAL

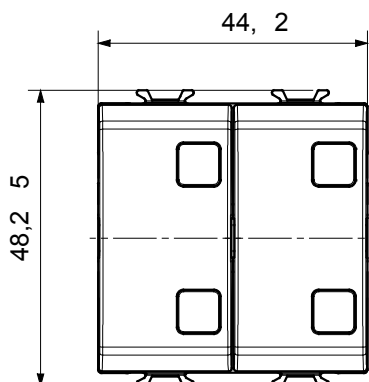

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

