



The 4 channel KNX contact interface allows you to connect up to 4 input contacts, which are without voltage and independent (buttons, switches, sensors etc.), and send the relative commands to actuator devices using the KNX bus. The interface is powered by the bus line. The voltage (SELV) required to scan the contacts is supplied by the same interface. The device is fitted with 4 outputs to connect any low-consumption indicator LEDs (e.g. GW 10 886, GW 10 887, GW 10 888, GW 10 889, GW 10 890) which are used to indicate the status of the commanded charge.

Category	ON / OFF	Communication	KNX
No. DIN modules	4	Power supply	Via KNX BUS, 29V DC SELV
Supply voltage	230 V ac - 50/60 Hz	Interfaces	KNX TP1
Current absorbed by KNX bus (mA)	Max. 9 mA	Max cable length	10 m
No. input channels	4	Inputs	Per contatti privi di potenziale ed indipendenti
No. output channels	4	Outputs for LED	Tensione: 3,3 V dc - Corrente max: 1 mA
Connection to the KNX bus	KNX bus terminal	Working temperature	-5 ÷ +45 °C
Stocking temperature	-25 +70 °C	IP degree	IP20
Relative humidity (non-condensative)	Max 93%	Standard	Low Voltage Directive 2014/35/EU - Electromagnetic Compatibility Directive 2014/30/ EU - EN50428, EN50090-2-2

DIMENSIONAL

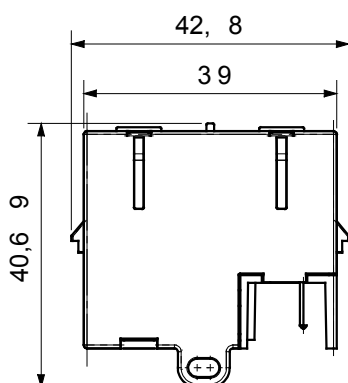

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

