

# RO1377


## Incremental encoder with hollow shaft

RO-0360-I05/N6



Status Archive

/ROP521 + E11855

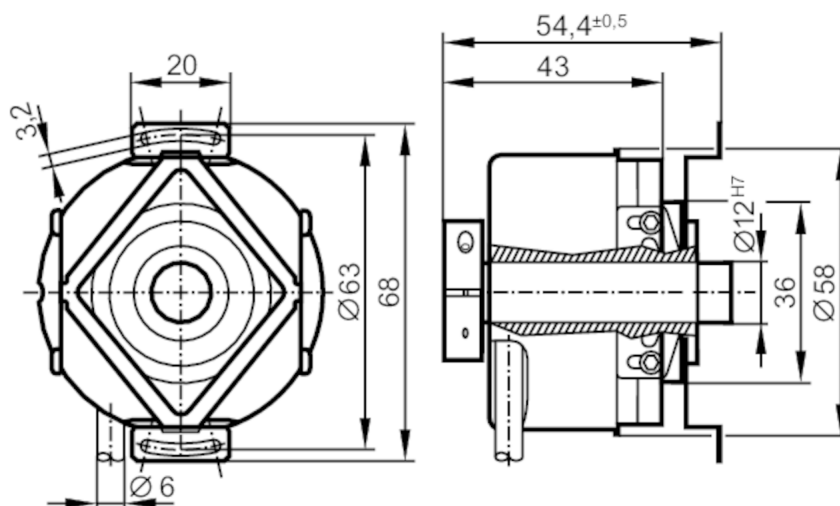

### Application

|                    |               |
|--------------------|---------------|
| Function principle | incremental   |
| Detection system   | photoelectric |

### Electrical data

|                             |      |       |
|-----------------------------|------|-------|
| Operating voltage tolerance | [%]  | 10    |
| Operating voltage           | [V]  | 5 DC  |
| Current consumption         | [mA] | < 150 |

### Outputs

|                              |       |     |
|------------------------------|-------|-----|
| Electrical design            |       | TTL |
| Max. current load per output | [mA]  | 20  |
| Switching frequency          | [kHz] | 300 |
| Phase difference A und B     | [°]   | 90  |

### Measuring/setting range

|            |                |
|------------|----------------|
| Resolution | 360 resolution |
|------------|----------------|

### Operating conditions

|                            |                                                     |           |
|----------------------------|-----------------------------------------------------|-----------|
| Ambient temperature        | [°C]                                                | -30...100 |
| Max. relative air humidity | [%]                                                 | 98        |
| Protection                 | IP 64; (on the housing: IP 66; on the shaft: IP 64) |           |

### Tests / approvals

|                      |         |       |
|----------------------|---------|-------|
| Shock resistance     |         | 200 g |
| Vibration resistance |         | 30 g  |
| MTTF                 | [years] | 190   |



## Incremental encoder with hollow shaft

RO-0360-I05/N6

| Mechanical data               |         |                                               |
|-------------------------------|---------|-----------------------------------------------|
| Weight                        | [g]     | 724.2                                         |
| Dimensions                    | [mm]    | Ø 58 / L = 54.4                               |
| Materials                     |         | aluminium                                     |
| Max. revolution, mechanical   | [U/min] | 12000; (when using both shaft clamping rings) |
| Max. starting torque          | [Nm]    | 2.5                                           |
| Reference temperature torque  | [°C]    | 20                                            |
| Shaft design                  |         | continuous hollow shaft                       |
| Shaft diameter                | [mm]    | 12                                            |
| Shaft fit                     |         | H7                                            |
| Shaft material                |         | stainless steel                               |
| Installation depth of shaft   | [mm]    | 10                                            |
| Max. axial shaft misalignment | [mm]    | 1; (max. radial shaft alignment: ± 0,05 mm)   |


| Remarks |                      |
|---------|----------------------|
| Notes   | discontinued article |

## Electrical connection

Cable: 6 m, PUR; radial, can also be used axially

|             |                  |
|-------------|------------------|
| brown       | A                |
| green       | A inverted       |
| grey        | B                |
| pink        | B inverted       |
| red         | 0 index          |
| black       | 0 index inverted |
| blue        | L+ sensor        |
| white       | 0V sensor        |
| brown/green | L+ (Up)          |
| white/green | 0V (Un)          |
| lilac       | failure inverted |
| screen      | housing          |

## Diagrams and graphs

|               |                                                                                                                                     |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Pulse diagram |  <p>Output A</p> <p>Output B</p> <p>0 index</p> |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|

Status Archive

/ROP521 + E11855