

# DFS60E-TGCA00100

DFS60

**INCREMENTAL ENCODERS** 





### Ordering information

Туре	Part no.
DFS60E-TGCA00100	1075493

Other models and accessories → www.sick.com/DFS60

Illustration may differ



#### Detailed technical data

#### Performance

Pulses per revolution	100 <sup>1)</sup>
Measuring step	90° electric/pulses per revolution
Measuring step deviation at non binary number of lines	± 0.2°
Error limits	± 0.3°

<sup>&</sup>lt;sup>1)</sup> See maximum revolution range.

#### Interfaces

Communication interface detail         TTL / RS-422           Number of signal channels         6-channel           Initialization time         40 ms           Output frequency         ≤ 300 kHz           Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           4.5 V 5.5 V, TTL/RS-422         ≤ 30 mA           Load current         ≤ 30 mA           4.5 V 5.5 V, Open Collector         ≤ 30 mA           Load current         ≤ 30 mA           Power consumption         ≤ 30 mA           HTL/Push pull         ≤ 30 mA           Power consumption         ≤ 30 mA           TTL/HTL         ≤ 30 mA           TTL/HTL         ≤ 30 mA           Power consumption         ≤ 30 mA           TOUCHICL         ≤ 30 mA           So 5 W (without load)           TTL/HTL         ≤ 30 mA           Power consumption         ≤ 30 mA           So 5 W (without load)           TOUCHICL         ≤ 30 mA           So 5 W (without load)           TOUCHICL         ≤ 30 mA           So 5 W (without load)           TO 5 W (without load)           TO 6 W (without load)		
Number of signal channels         6-channel           Initialization time         40 ms           Output frequency         ≤ 300 kHz           Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           4.5 V 5.5 V, TTL/RS-422         Load current           Load current         ≤ 30 mA           TTL/RS-422         ≤ 30 mA           Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           HTL/Push pull         ≤ 30 mA           Load current         ≤ 30 mA           TTL/HTL         Load current           Power consumption         ≤ 0.5 W (without load)           TTL/HTL         Load current           Power consumption         ≤ 30 mA           TOUGHT (without load)         ≤ 30 mA	Communication interface	Incremental
Initialization time         40 ms           Output frequency         ≤ 300 kHz           Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           4.5 V 5.5 V, TTL/RS-422         ≤ 30 mA           Load current         ≤ 30 mA           TTL/RS-422         ≤ 30 mA           Load current         ≤ 30 mA           Power consumption         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           HTL/Push pull         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           TTL/HTL         Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)	Communication Interface detail	TTL / RS-422
Output frequency \$ 300 kHz   Load current \$ 0.5 W (without load)   4.5 V 5.5 V, TTL/RS-422 \$ 30 mA   Load current \$ 30 mA   4.5 V 5.5 V, Open Collector \$ 30 mA   TTL/RS-422 Load current   Load current \$ 30 mA   Power consumption \$ 0.5 W (without load)   HTL/Push pull \$ 30 mA   Load current \$ 30 mA   Power consumption \$ 0.5 W (without load)   TTL/HTL Load current   Power consumption \$ 30 mA   \$ 30 mA \$ 0.5 W (without load)	Number of signal channels	6-channel
Load current         ≤ 30 mA           4.5 V 5.5 V, TTL/RS-422         ≤ 30 mA           Load current         ≤ 30 mA           4.5 V 5.5 V, Open Collector         ≤ 30 mA           Load current         ≤ 30 mA           TTL/RS-422         ≤ 30 mA           Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           HTL/Push pull         ≤ 30 mA           Load current         ≤ 30 mA           Power consumption         ≤ 0.5 W (without load)           TTL/HTL         Load current         ≤ 30 mA           Load current         ≤ 0.5 W (without load)	Initialization time	40 ms
Power consumption  4.5 V 5.5 V, TTL/RS-422  Load current Load current Load current Load current Load current Load current Power consumption  Load current Load current Load current Load current Load current Load current Power consumption  Load current Load current Power consumption  TTL/HTL  Load current Load current Power consumption  S 30 mA  S 30	Output frequency	≤ 300 kHz
4.5 V 5.5 V, TTL/RS-422  Load current  Load current  Load current  Load current  Load current  Load current  S 30 mA  Power consumption  Load current  Load current  Load current  Load current  Load current  S 30 mA  S 0.5 W (without load)  TTL/Push pull  Load current  Power consumption  Load current  S 30 mA  S 0.5 W (without load)  TTL/HTL  Load current  Power consumption  S 30 mA  S 0.5 W (without load)	Load current	≤ 30 mA
Load current 4.5 V 5.5 V, Open Collector  Load current  Load current  Load current  Load current  S 30 mA   S 30 mA   Load current  S 30 mA  S 0.5 W (without load)  TTL/Push pull  Load current  Power consumption  S 30 mA  S 0.5 W (without load)  TTL/HTL  Load current  Load current  S 30 mA  S 0.5 W (without load)  TTL/HTL  Load current  S 30 mA  S 0.5 W (without load)	Power consumption	≤ 0.5 W (without load)
4.5 V 5.5 V, Open Collector  Load current ≤ 30 mA  TTL/RS-422  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  HTL/Push pull  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  9 ower consumption ≤ 0.5 W (without load)	4.5 V 5.5 V, TTL/RS-422	
TTL/RS-422  Load current ≤ 30 mA  Power consumption ≤ 30 mA  Load current ≤ 30 mA  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  ≤ 0.5 W (without load)	Load current	≤ 30 mA
TTL/RS-422  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  HTL/Push pull  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  TOUR NOT	4.5 V 5.5 V, Open Collector	
Load current Power consumption  HTL/Push pull  Load current Power consumption  ≥ 30 mA  ≤ 0.5 W (without load)  TTL/HTL  Load current Power consumption  ≥ 30 mA  ≤ 0.5 W (without load)   TTL/HTL  Load current Power consumption  ≥ 30 mA  ≤ 0.5 W (without load)	Load current	≤ 30 mA
Power consumption  HTL/Push pull  Load current Power consumption  ≥ 30 mA  ≤ 0.5 W (without load)  TTL/HTL  Load current Power consumption  ≥ 30 mA  ≥ 0.5 W (without load)	TTL/RS-422	
HTL/Push pull  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)	Load current	≤ 30 mA
Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)	Power consumption	≤ 0.5 W (without load)
Power consumption ≤ 0.5 W (without load)  TTL/HTL  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)	HTL/Push pull	
TTL/HTL  Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)	Load current	≤ 30 mA
Load current ≤ 30 mA  Power consumption ≤ 0.5 W (without load)	Power consumption	≤ 0.5 W (without load)
Power consumption ≤ 0.5 W (without load)	TTL/HTL	
	Load current	≤ 30 mA
Open Collector	Power consumption	≤ 0.5 W (without load)
	Open Collector	

Load current	≤ 30 mA
Power consumption	≤ 0.5 W (without load)

#### Electrical data

Connection type	Male connector, M23, 12-pin, radial
Supply voltage	10 32 V
Reference signal, number	1
Reference signal, position	90°, electric, logically gated with A and B
Reverse polarity protection	✓
Short-circuit protection of the outputs	<b>✓</b> <sup>1)</sup>
MTTFd: mean time to dangerous failure	300 years (EN ISO 13849-1) <sup>2)</sup>

 $<sup>^{1)}\,\</sup>mbox{Short-circuit}$  opposite to another channel or GND permissable for maximum 30 s.

#### Mechanical data

Mechanical design	Through hollow shaft
Shaft diameter	14 mm
Weight	+ 0.2 kg
Shaft material	Stainless steel
Flange material	Aluminum
Housing material	Aluminum die cast
Start up torque	0.8 Ncm (+20 °C)
Operating torque	0.6 Ncm (+20 °C)
Permissible shaft movement, axial static/dynamic	± 0.5 mm / ± 0.2 mm
Permissible shaft movement, radial static/dynamic	± 0.3 mm / ± 0.1 mm
Operating speed	≤ 6,000 min <sup>-1</sup> 1)
Moment of inertia of the rotor	40 gcm <sup>2</sup>
Bearing lifetime	3.6 x 10^10 revolutions
Angular acceleration	≤ 500,000 rad/s²

 $<sup>^{1)}</sup>$  Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

#### Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-4
Enclosure rating	IP65, Housing side, male connector (according to IEC 60529) $^{1)}$ IP65, shaft side (according to IEC 60529)
Permissible relative humidity	90 % (condensation of the optical scanning not permitted)
Operating temperature range	0 °C +85 °C
Storage temperature range	-40 °C +100 °C, without package
Resistance to shocks	50 g, 6 ms (according to EN 60068-2-27)
Resistance to vibration	20 g, 10 Hz 2,000 Hz (according to EN 60068-2-6)

 $<sup>^{1)}</sup>$  With mating connector fitted.


<sup>&</sup>lt;sup>2)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

#### Classifications

ECI@ss 5.0	27270501
ECI@ss 5.1.4	27270501
ECI@ss 6.0	27270590
ECI@ss 6.2	27270590
ECI@ss 7.0	27270501
ECI@ss 8.0	27270501
ECI@ss 8.1	27270501
ECI@ss 9.0	27270501
ECI@ss 10.0	27270501
ECI@ss 11.0	27270501
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
UNSPSC 16.0901	41112113

#### Dimensional drawing (Dimensions in mm (inch))

Through hollow shaft, radial male connector M12 and M23

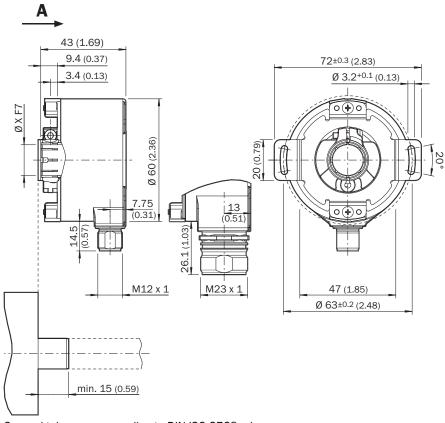


General tolerances according to DIN ISO 2768-mk ① Cable diameter = 5.6 mm +/- 0.2 mm bend radius = 30 mm

#### PIN assignment

#### Cable, 8-wire

View of M12 male device connector on encoder



View of M23 male device connector on encoder




PIN, 8-pin, M12 male connector	PIN, 12-pin, M23 male connector	Color of the wires for encoders with cable outlet	TTL/HTL signal	Sin/cos 1.0 V <sub>ss</sub>	Explanation
1	6	Brown	_A	COS-	Signal wire
2	5	White	A	COS+	Signal wire
3	1	Black	В	SIN-	Signal wire
4	8	Pink	В	SIN+	Signal wire
5	4	Yellow	_Z	_Z	Signal wire
6	3	Violet	Z	Z	Signal wire
7	10	Blue	GND	GND	Ground connection of the encoder
8	12	Red	+U <sub>s</sub>	+U <sub>s</sub>	Supply voltage (volt-free to housing)
-	9	-	n.c.	n.c.	Not assigned
-	2	-	n.c.	n.c.	Not assigned
-	11	-	n.c.	n.c.	Not assigned
-	7 1)	-	O-SET 1)	n.c.	Set zero pulse 1)
Screen	Screen	Screen	Screen	Screen	Screen connected to housing on encoder side.  Connected to ground on control side.

<sup>&</sup>lt;sup>1)</sup> For electrical interfaces only: M, U, V, W with 0-SET function on PIN 7 on M23 male connector. The 0-SET input is used to set the zero pulse on the current shaft position. If the 0-SET input is connected to U<sub>S</sub> for longer than 250 ms after it had previously been unassigned for at least 1,000 ms or had been connected to the GND, the current position of the shaft is assigned to the zero pulse signal "Z".


#### Maximum revolution range

Maximum revolution range

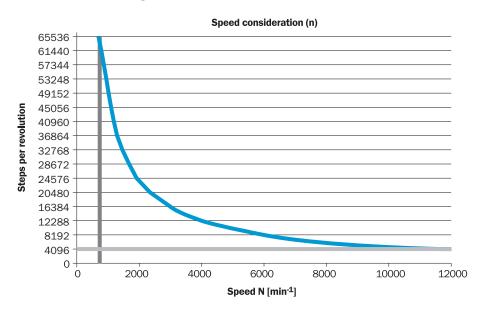

#### Signal outputs

Signal outputs



CW with view on the encoder shaft in direction "A", compare dimensional drawing.

Supply voltage	Output
4,5 V 5,5 V	ΠL
10 V 32 V	ΠL
10 V 32 V	HTL

#### Recommended accessories

Other models and accessories → www.sick.com/DFS60

	Brief description	Туре	Part no.
Flanges			
	Standard stator coupling	BEF-DS00XFX	2056812
Other mount	ting accessories		
	Clamping ring for metal hollow shaft, metal	BEF-KR-M	2064709
Plug connec	tors and cables		
->	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 2 m	DOL-2312-G02MLA3	2030682
-	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, halogen-free, shielded, 3 m	DOL-2312- GO3MMA3	2029213
	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, halogen-free, shielded, 5 m	DOL-2312- G05MMA3	2029214
	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 7 m	DOL-2312-G07MLA3	2030685
	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 10 m	DOL-2312-G10MLA3	2030688
-	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, halogen-free, shielded, 10 m	DOL-2312- G10MMA3	2029215
	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 15 m	DOL-2312-G15MLA3	2030692
-	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, halogen-free, shielded, 1.5 m	DOL-2312- G1M5MA3	2029212
	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 20 m	DOL-2312-G20MLA3	2030695
-	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, halogen-free, shielded, 20 m	DOL-2312- G20MMA3	2029216
-	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 25 m	DOL-2312-G25MLA3	2030699
	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, shielded, 30 m	DOL-2312-G30MLA3	2030702
-	Head A: female connector, M23, 12-pin, straight Head B: Flying leads Cable: Incremental, PUR, halogen-free, shielded, 30 m	DOL-2312- G30MMA3	2029217
	Head A: female connector, M23, 12-pin, straight Head B: - Cable: HIPERFACE <sup>®</sup> , SSI, Incremental, shielded	DOS-2312-G02	2077057

# DFS60E-TGCA00100 | DFS60 INCREMENTAL ENCODERS

	Brief description	Туре	Part no.
(Final)	Head A: female connector, M23, 12-pin, angled Head B: - Cable: HIPERFACE <sup>®</sup> , SSI, Incremental, shielded	DOS-2312-W01	2072580

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

