



Image-based code readers ICR84x-2 FlexLens / ICR847-2L FlexLens / FlexLens

ICR847-2L1030 FlexLens



Model Name > **ICR847-2L1030 FlexLens**
Part No. > **1056546**




Illustration may differ

At a glance

- Configure with live image and auto setup
- Fast, omni-directional reading of printed and direct marked 1D and 2D codes
- Rapid image and data transfer via Ethernet
- Adjustable reading distances with C-mount lens and illumination
- Industrial IP 65 housing (with optional hood and cap) for rough environmental conditions

Your benefits

- Fast, cost-effective commissioning via easy user interface with live image and auto setup configuration
- Omni-directional identification of 1D and 2D codes makes it possible to identify objects that are not aligned
- High-speed, reliable decoding of low contrast and direct part marked codes guarantees secure identification and flexible use
- Different imager resolutions, C-mount lens options and illumination types and colors make it ideal for a wide range of solutions
- Dynamic parameter switching makes decoding different code qualities possible with just one setting

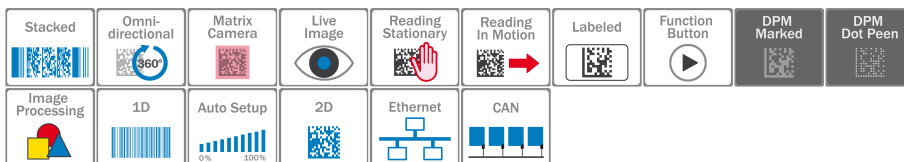

Features

Version:	FlexLens
Reading field:	Side
Focus:	Variable (per interchangeable lens)
Sensor:	CMOS matrix sensor
Sensor resolution:	1,280 px x 960 px (1.2 megapixel)
Code resolution:	≥0.1 mm ¹⁾
Reading distance (at code resolution):	0.1 m ... 3 m ²⁾
Scanning frequency:	38 Hz, at full resolution
Light source:	External illumination
MTBF:	75,000 h

1) 2) Depends on lens used; valid for Data Matrix, PDF417 and 1D codes with good printing quality

Performance

Bar code types:	Interleaved 2 of 5, Codabar, Code 128, Code 39, GS1-128/EAN 128, Pharmacode, UPC/GTIN/EAN
2D code types:	Data Matrix ECC200, GS1 Data-Matrix, QR code
No. of codes per scan:	1 ... 50
No. of codes per reading interval:	1 ... 50
No. of characters per reading interval:	4,000

Interfaces

Serial (RS-232):	✓
Function (Serial (RS-232)):	Host, AUX
Data transmission rate (Serial (RS-232)):	300 Baud ... 57,600 Baud, AUX: 9,600 Baud
Ethernet:	✓
Function (Ethernet):	Host, AUX, image transmission
Data transmission rate (Ethernet):	10/100 Mbit
Protocol (Ethernet):	TCP/IP, FTP (image transmission), PROFINET (optional via external connection module CDM)
CAN bus:	✓
Function (CAN bus):	SICK CAN sensor network (Master/Slave, Multiplexer)
Data transmission rate (CAN bus):	10 kbit/s ... 1 Mbit/s
Protocol (CAN bus):	CANopen, CSN (SICK CAN Sensor Network)
PROFIBUS DP:	✓
Remark (PROFIBUS DP):	Optional via external connection module (CDM + CMF)
DeviceNet:	✓
Remark (DeviceNet):	Optional via external connection module (CDM + CMF)
Acoustic indicators:	Beeper/buzzer (can be switched off, can be assigned a function to signal a result)
Optical indicators:	6 LEDs (status displays)
Switching inputs:	2
Switching outputs:	2 (Result 1 NPN, Result 2 PNP)
Reading pulse:	Non-powered, Switching inputs, Serial interface

Mechanics/electronics

Operating voltage:	15 V DC ... 30 V DC
Power consumption:	8 W
Electrical connection:	1 M12 cylindrical connector (4-pin socket, Ethernet), cable with 15-pin D-sub HD plug (0.9 m, $\pm 5\%$)
Housing:	Die-cast zinc
Housing color:	Light blue (RAL 5012)
Weight:	900 g, with connecting cable
Dimensions:	123.3 mm x 80 mm x 39 mm
Enclosure rating:	IP 30, IP 65 (EN 60529) ^{1) 2)}
Protection class:	III (EN 61140)
Lens:	C-mount

¹⁾ For installed IP 65 Ethernet cable and IP 65 lens cover or for IP 65 cover and IP 65 lens cover ²⁾ Without covered Ethernet connection or with standard Ethernet cable and without lens cover.

Ambient data

Electromagnetic compatibility (EMC):	EN 61000-6-2/EN 61000-6-4
Vibration resistance:	EN 60068-2-6

Shock resistance:

Ambient operating temperature:

Storage temperature:

Permissible relative humidity:

Ambient light safety:

EN 60068-2-27


0 °C ... 40 °C

-20 °C ... 70 °C

± 90 %, non-condensing

2,000 lx, on bar code

Reading field diagram

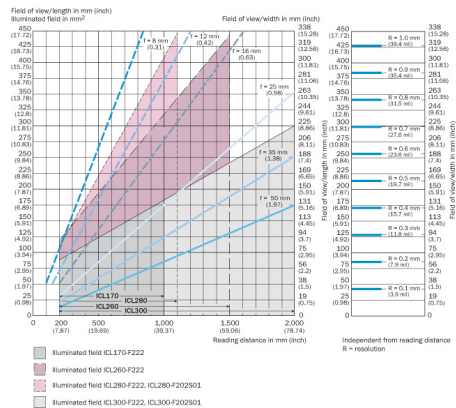

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com