



## Photoelectric sensors W100, Through-beam photoelectric sensor

WS/WE100-P1332



**Model Name** > [WS/WE100-P1332](#)  
**Part No.** > [6026029](#)



*Illustration may differ*

#### At a glance

- Standard miniature housing with M3 threaded mounting holes
- Optics with standard red LED or bright light LED
- Special slotted masks and polarizing filter tip adapters available as accessories
- Light/dark switching and sensitivity adjustment via rotary switch possible

#### Your benefits

- Highly visible light spot simplifies alignment
- Less contamination due to high optical operating reserve
- M3 threaded mounting holes provide easy installation
- Special accessory allows optimizing the optical performance depending on the application



#### Features

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Sensor/detection principle:      | Through-beam photoelectric sensor |
| Dimensions (W x H x D):          | 11 mm x 31 mm x 20 mm             |
| Housing design (light emission): | Rectangular                       |
| Sensing range max.:              | 0 m ... 15 m                      |
| Sensing range:                   | 0 m ... 12 m                      |
| Type of light:                   | Visible red light                 |
| Light source:                    | LED <sup>1)</sup>                 |
| Wave length:                     | 680 nm                            |
| Angle of dispersion:             | Ca. 7.2 °                         |
| Focus adjustable:                | -                                 |
| Light spot size (distance):      | Ø 1,500 mm (12 m)                 |

<sup>1)</sup> Average service life of 100,000 h at T<sub>A</sub> = +25 °C


#### Mechanics/electronics

|                                    |                                   |
|------------------------------------|-----------------------------------|
| Supply voltage:                    | 10 V DC ... 30 V DC <sup>1)</sup> |
| Ripple:                            | ± 10 % <sup>2)</sup>              |
| Power consumption, sender:         | ≤ 15 mA <sup>3)</sup>             |
| Power consumption, receiver:       | ≤ 20 mA <sup>4)</sup>             |
| Output type:                       | PNP, open collector               |
| Switching mode:                    | Light switching                   |
| Signal voltage PNP HIGH/LOW:       | UV - 1,8 V/ca. 0 V                |
| Output current I <sub>max.</sub> : | ≤ 100 mA                          |


|                                |                                                    |
|--------------------------------|----------------------------------------------------|
| Response time:                 | $\leq 0.5 \text{ ms}$ <sup>5)</sup>                |
| Switching frequency:           | 1,000 Hz <sup>6)</sup>                             |
| Angle of reception:            | Ca. 15 °                                           |
| Connection type:               | Cable, 3-wire, 2 m <sup>7)</sup>                   |
| Cable material:                | PVC                                                |
| Conductor cross-section:       | 0.18 mm <sup>2</sup>                               |
| Circuit protection:::          | A, B, D <sup>8)</sup> <sup>9)</sup> <sup>10)</sup> |
| Weight:                        | 106 g                                              |
| Polarisation filter:           | -                                                  |
| Housing material:              | ABS/PC, Plastic                                    |
| Optics material:               | PMMA                                               |
| Enclosure rating:              | IP 65                                              |
| Ambient operating temperature: | -25 °C ... 55 °C                                   |
| Ambient storage temperature:   | -40 °C ... 70 °C                                   |

<sup>1)</sup> Limit values, operation in short-circuit protected network max. 8 A <sup>2)</sup> May not exceed or fall short of  $V_S$  tolerances <sup>3)</sup> <sup>4)</sup> Without load <sup>5)</sup> Signal transit time with resistive load <sup>6)</sup> With light/dark ratio 1:1 <sup>7)</sup> Do not bend below 0 °C <sup>8)</sup> A =  $V_S$  connections reverse-polarity protected <sup>9)</sup> B = inputs and output reverse-polarity protected <sup>10)</sup> D = outputs overcurrent and short-circuit protected

## Dimensional drawing

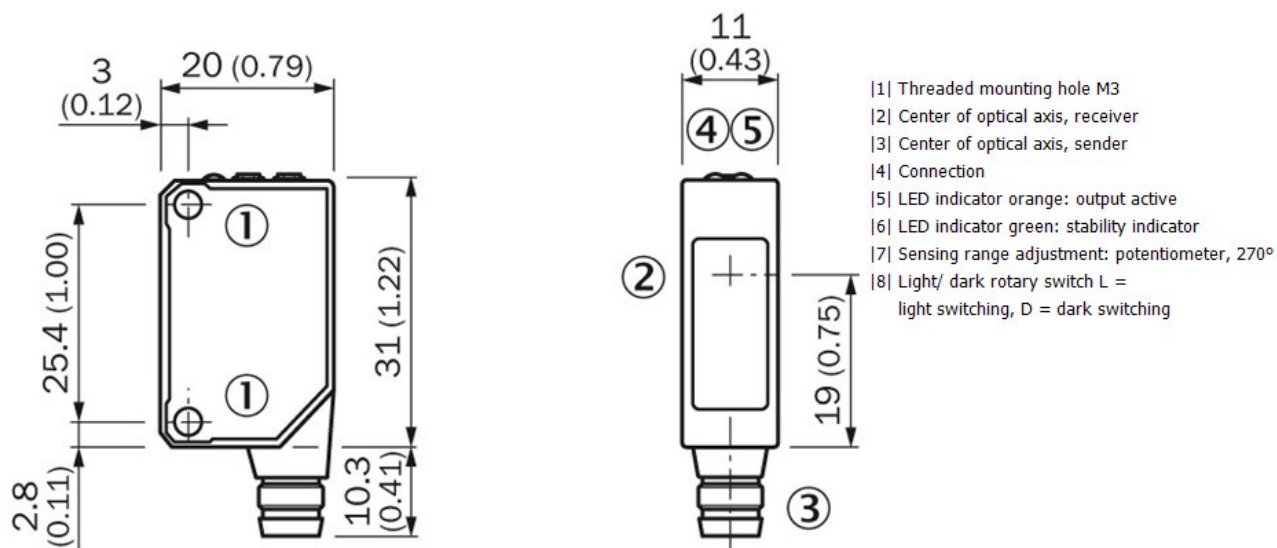


Adjustments possible

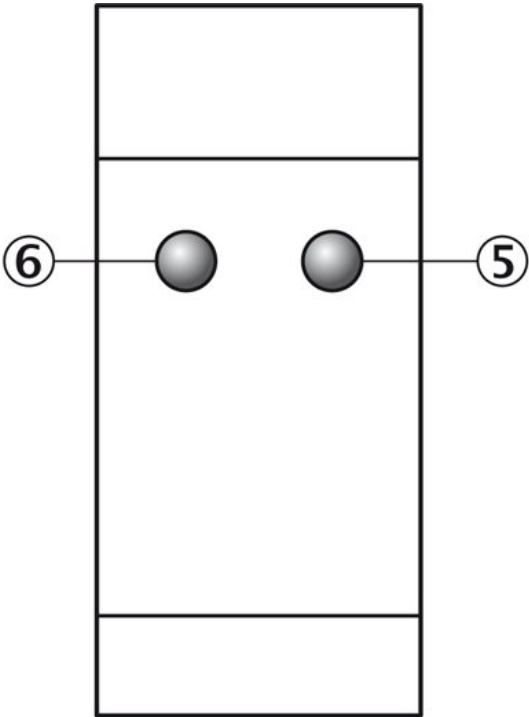


|5| Orange LED indicator : switching output active  
|6| LED indicator green: stability indicator

Connection diagram

①




②

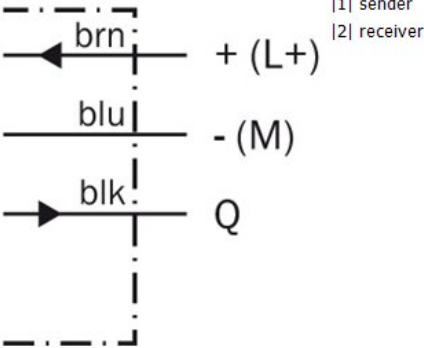


|1| sender  
|2| receiver

## Characteristic curve

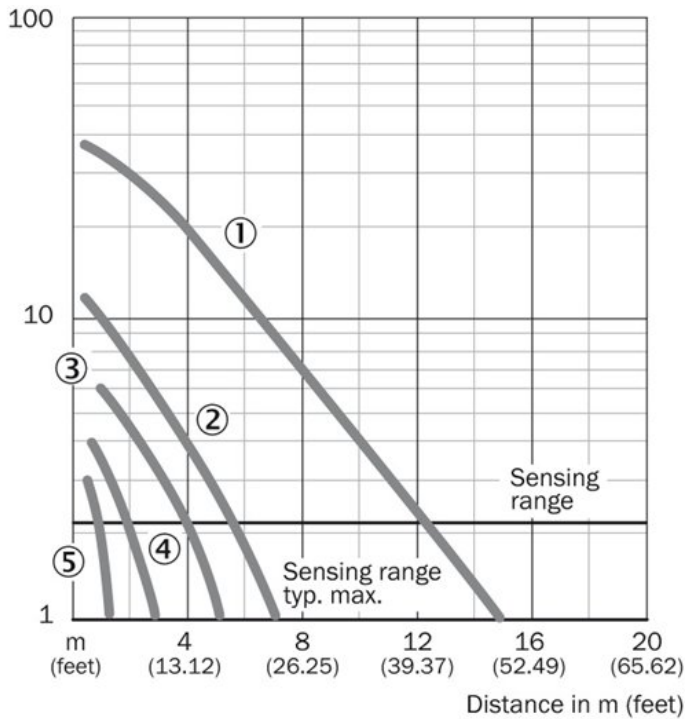

- |1| Without masks
- |2| With polarization filter tip adapter
- |3| With slotted mask, width 2.0 mm
- |4| With slotted mask, width 1.0 mm
- |5| With slotted mask, width 0.5 mm

## Sensing range diagram

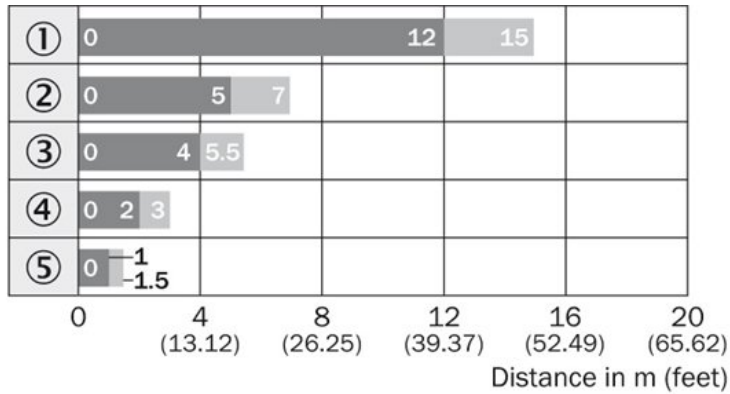

- |1| Without masks
- |2| With polarization filter tip adapter
- |3| With slotted mask, width 2.0 mm
- |4| With slotted mask, width 1.0 mm
- |5| With slotted mask, width 0.5 mm


■ Sensing range      ■ Sensing range typ. max.

### Sensing range reduction when slotted masks are used

- ① Without masks/polarization filter
- ② With polarization filter tip adapter
- ③ With slotted mask, width 2.0 mm
- ④ With slotted mask, width 1.0 mm
- ⑤ With slotted mask, width 0.5 mm

## Connection type

---

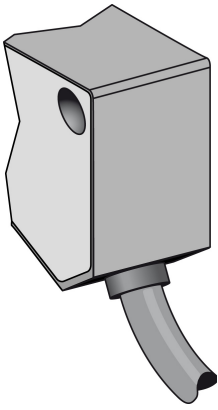

#### **Australia**

Phone +61 3 9457 0600  
1800 334 802 – tollfree  
E-Mail sales@sick.com.au

#### **Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

#### **Brasil**

Phone +55 11 3215-4900  
E-Mail sac@sick.com.br

#### **Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

#### **Ceská Republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

#### **China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

#### **Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

#### **Deutschland**

Phone +49 211 5301-301  
E-Mail kundenservice@sick.de

#### **España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

#### **France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

#### **Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

#### **India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

#### **Israel**

Phone +972-4-6801000  
E-Mail info@sick-sensors.com

#### **Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

#### **Japan**

Phone +81 (0)3 3358 1341  
E-Mail support@sick.jp

#### **Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

#### **Nederlands**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

#### **Norge**

Phone +47 67 81 50 00  
E-Mail austefjord@sick.no

#### **Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

#### **Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

#### **România**

Phone +40 356 171 120  
E-Mail office@sick.ro

#### **Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

#### **Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

#### **Singapore**

Phone +65 6744 3732  
E-Mail admin@sicksgp.com.sg

#### **Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

#### **South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

#### **South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

#### **Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

#### **Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

#### **Taiwan**

Phone +886-2-2375-6288  
E-Mail sales@sick.com.tw

#### **Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

#### **United Arab Emirates**

Phone +971 (0) 4 8865 878  
E-Mail info@sick.ae

#### **USA/México**

Phone +1(952) 941-6780  
1 800-325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)