

XPSMP11123

module XPS-MP - 2 independent functions - 24 V DC



Main

Range of product	Preventa Safety automation
Product or component type	Safety controller with pre-defined function
Safety module name	XPSMP
Safety module application	2 independent functions
Safety use category	Category 4 maximum conforming to EN/IEC 60954-1
Type of start	Monitored (configuration 9) Monitored (configuration 8) Monitored (configuration 6) Monitored (configuration 4) Monitored (configuration 2) Monitored (configuration 15) Monitored (configuration 13) Monitored (configuration 12) Automatic or unmonitored (configuration 7) Automatic or unmonitored (configuration 5) Automatic or unmonitored (configuration 3) Automatic or unmonitored (configuration 14) Automatic or unmonitored (configuration 11) Automatic or unmonitored (configuration 10) Automatic or unmonitored (configuration 1)
Checks	Configuration (configuration 9) Configuration (configuration 6) Configuration (configuration 5) Configuration (configuration 4) Configuration (configuration 3) Configuration (configuration 13) Configuration (configuration 10)
Standards	DIN V VDE 801 + A1 EN/IEC 60204-1 EN/IEC 60947-1 + A11 EN/IEC 60947-5-1
Product certifications	BIA CSA UL
[Us] rated supply voltage	24 V DC (- 20...20 %)
Connections - terminals	Captive screw clamp terminals: 0.5...1.5 mm ² , 2 wires flexible with cable end, with double bezel Captive screw clamp terminals: 0.25...2.5 mm ² , 1 wire flexible with cable end, without bezel Captive screw clamp terminals: 0.25...1.5 mm ² , 1 wire flexible with cable end, with bezel Captive screw clamp terminals: 0.25...1 mm ² , 2 wires flexible with cable end, without bezel Captive screw clamp terminals: 0.14...2.5 mm ² , 1 wire solid without cable end Captive screw clamp terminals: 0.14...2.5 mm ² , 1 wire flexible without cable end Captive screw clamp terminals: 0.14...0.75 mm ² , 2 wires solid without cable end Captive screw clamp terminals: 0.14...0.75 mm ² , 2 wires flexible without cable end
Safety level	Can reach SIL 3 conforming to EN/IEC 62061 Can reach PL e/category 4 conforming to EN/ISO 13849-1

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended to be used as a substitute for the specific user manual of the product. It is the duty of any user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Complementary

Function of module	Configuration 9: guard monitoring for injection presses and blowing machines, category 4 Configuration 8: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 Configuration 7: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 Configuration 6: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 Configuration 5: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 Configuration 4: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 Configuration 3: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4 Configuration 2: emergency stop monitoring 1-channel wiring, category 2 Configuration 15: coded magnetic switch monitoring, category 4 Configuration 14: coded magnetic switch monitoring, category 4 Configuration 13: relay output safety light curtain monitoring, category 4 Configuration 12: sensing mat and edges monitoring, category 3 Configuration 11: sensing mat and edges monitoring, category 3 Configuration 10: enabling grip switch monitoring (3-position switch), category 4 Configuration 1: emergency stop monitoring 1-channel wiring, category 2 Configuration 0: functions disabled (factory setting)
Synchronisation time between inputs	Unlimited (configuration 8) Unlimited (configuration 7) Unlimited (configuration 4) Unlimited (configuration 3) 1.5 s (configuration 9) 1.5 s (configuration 6) 1.5 s (configuration 5) 1.5 s (configuration 15) 1.5 s (configuration 14) 0.5 s (configuration 13)
Power consumption	≤ 5 W
Input protection type	Internal, electronic
[Uc] control circuit voltage	24 V
Line resistance	100 Ohm, cable length: ≤ 2000 m
Number of safety circuits	3 NO relays per function (6 NO total), volt-free
Number of additional circuits	3 solid state outputs
Breaking capacity	C300 : inrush 1800 VA AC-15 for relay output C300 : holding 180 VA AC-15 for relay output
Breaking capacity	1.5 A / 24 V - L/R = 50 ms, DC-13 for relay output 20 mA / 24 V for static output circuit
Output thermal current	6 A for 1 output and 2 A for the other 2 outputs for relay 3.3 A for all 3 outputs relay simultaneously 2 A for 1 output and 4 A for the other 2 outputs for relay
[Ith] conventional free air thermal current	≤ 20 A
Associated fuse rating	6 A fast blow for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 4 A gG for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Response time on input open	< 30 ms
[Ui] rated insulation voltage	300 V, degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
Local signalling	12 LEDs
Mounting support	35 mm symmetrical DIN rail
Depth	114 mm
Height	99 mm
Width	45 mm
Product weight	0.32 kg

Environment

IP degree of protection	IP40 (enclosure) IP20 (terminals)
Ambient air temperature for operation	-10...55 °C
Ambient air temperature for storage	-25...85 °C


Dimensions

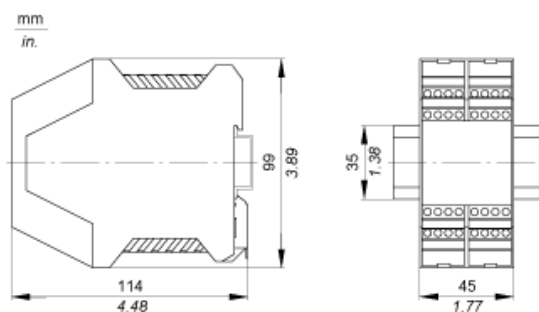

Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

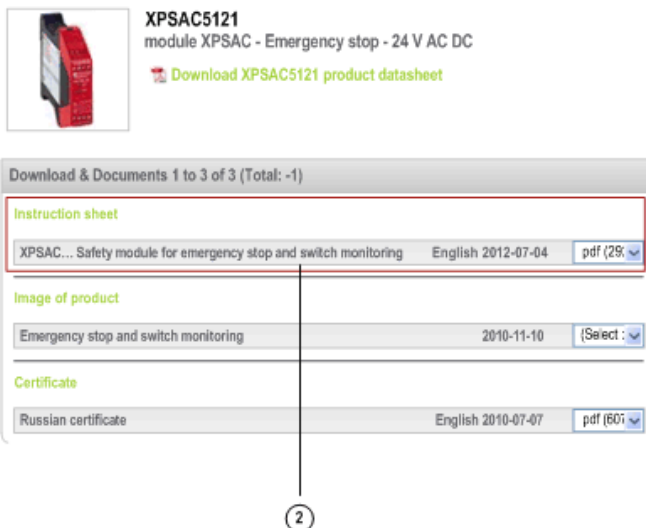

XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC
[Download XPSAC5121 product datasheet](#)

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet

Document Name	Language	Date	Format
XPSAC... Safety module for emergency stop and switch monitoring	English	2012-07-04	pdf (29K)

Image of product

Document Name	Date	Format
Emergency stop and switch monitoring	2010-11-10	[Select : ▼]



Certificate

Document Name	Language	Date	Format
Russian certificate	English	2010-07-07	pdf (60K)

1 Click on Download & Documents.

2 Click on Instruction sheet.

Safety Functions

	• Emergency stop monitoring, 1 channel wiring: ◦ 1 channel Emergency stop, automatic or unmonitored start. ◦ 1 channel Emergency stop, monitored start. • Emergency stop monitoring, 2 channel wiring: ◦ 2 channel Emergency stop, automatic or unmonitored start. ◦ 2 channel Emergency stop, monitored start.
	• Coded magnetic switch monitoring: ◦ Automatic or unmonitored start, synchronization time = 1,5 s. ◦ Monitored start, synchronization time = 1,5 s.
	• Guard monitoring with start test: ◦ Locking of guard with start test, automatic or unmonitored start. ◦ Locking of guard with start test, monitored start. • Guard monitoring with start test and synchronization time = 1,5 ms: ◦ Locking of guard with start test, automatic or unmonitored start. ◦ Locking of guard with start test, monitored start. • Guard monitoring for injection press or blowing machine.
	• Enabling switch monitoring, safety mat monitoring: ◦ Enabling switch monitoring, with or without start-up preparation. ◦ Safety mat monitoring, automatic or unmonitored start.
	• Sensing mat monitoring, monitored start.
	• Light curtain monitoring, monitored start, synchronization time = 0,5 s.