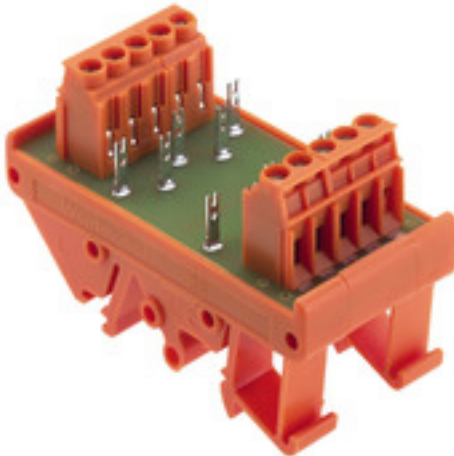


RSX LOETST. GSF 5/5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Similar to illustration**

Axial components such as resistors, diodes and capacitors, can be soldered into the RSX component modules.

Depending on the version, up to eight components can be soldered into our RSX modules.

General ordering data

Version	Assembly modul, Number of signals: 5
Order No.	0329860000
Type	RSX LOETST. GSF 5/5
GTIN (EAN)	4008190179373
Qty.	5 pc(s).

RSX LOETST. GSF 5/5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Height of lowest version	53 mm	Length	35 mm
Length (inches)	1.378 inch	Net weight	36 g
Width	70 mm	Width (inches)	2.756 inch

General data

Rail	TS 32, TS 35	Type of connection	Flat-blade connection
------	--------------	--------------------	-----------------------

Insulation coordination

Pollution severity	2
--------------------	---

Connection data

Type of connection	Flat-blade connection	Wire cross-section, solid, max.	4 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ECLASS 9.0	27-14-11-52	ECLASS 9.1	27-14-11-52
ECLASS 10.0	27-14-11-52	ECLASS 11.0	27-14-11-52

Approvals

Approvals	
-----------	---

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	WSCAD

RSX LOETST. GSF 5/5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Drawings
