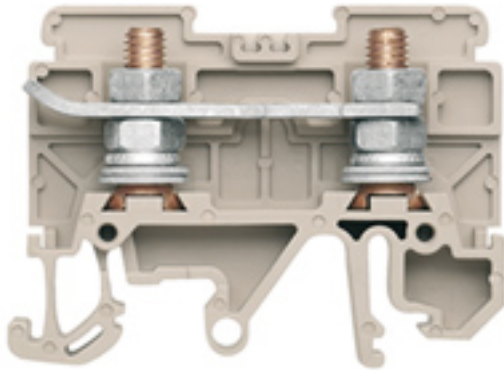


STL 5/EN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 16 mm ² , Screw connection
Order No.	0448460000
Type	STL 5/EN
GTIN (EAN)	4008190519834
Qty.	20 pc(s).

STL 5/EN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	47.5 mm	Depth (inches)	1.87 inch
Height	54.5 mm	Height (inches)	2.146 inch
Net weight	24.51 g	Width	16.4 mm
Width (inches)	0.646 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

End cover plate required	Yes	Number of levels	1
Number of clamping points per level	1	Levels cross-connected internally	No
PE connection	No	Rail	TS 32, TS 35

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	Open	Type of mounting	Clamped

Conductors for clamping (rated connection)

Connection direction	on side	Stud size for spade connection	M 5
Tightening torque, max.	3 Nm	Tightening torque, min.	2 Nm
Type of connection	Screw connection		

General

Rail	TS 32, TS 35
------	--------------

Rating data

Power loss in accordance with IEC 60947-7-x	2.43 W	Rated cross-section	16 mm ²
Rated voltage	800 V	Rated current	76 A
Volume resistance according to IEC 60947-7-x	0.42 mΩ	Rated impulse withstand voltage	8 kV
Pollution severity	3		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ECLASS 9.0	27-14-11-20	ECLASS 9.1	27-14-11-20
ECLASS 10.0	27-14-11-20	ECLASS 11.0	27-14-11-20

STL 5/EN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD
User Documentation	Beipackzettel_ST5.pdf StorageConditionsTerminalBlocks