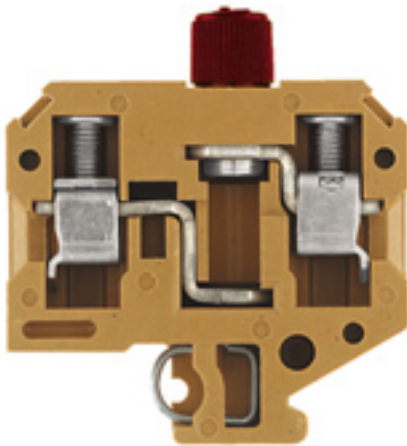


SAKS 6/GZ 500AC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Order No.	0531820000
Type	SAKS 6/GZ 500AC
GTIN (EAN)	4008190129088
Qty.	50 pc(s).

SAKS 6/GZ 500AC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	59.5 mm	Depth (inches)	2.343 inch
Height	65 mm	Height (inches)	2.559 inch
Net weight	47.6 g	Width	13 mm
Width (inches)	0.512 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	KrG	Colour	medium yellow
UL 94 flammability rating	V-0, 5VA		

System specifications

Version	Screw connection, Fuse cartridge, With glow lamp, One end without connector	End cover plate required	No
Number of levels	1	Number of clamping points per level	2
Levels cross-connected internally	No	PE connection	No
Rail	TS 32		

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	12400-198	Current size C (CSA)	10 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	26 AWG		

Conductors for clamping (rated connection)

Blade size	1.0 x 5.5 mm	Clamping range, max.	16 mm ²
Clamping range, min.	0.5 mm ²	Clamping screw	M 4
Connection cross-section, stranded, max.	10 mm ²	Connection cross-section, stranded, min.	1.5 mm ²
Connection direction	on side	Number of connections	2
Stripping length	14 mm	Tightening torque, max.	2.4 Nm
Tightening torque, min.	1.2 Nm	Torque level with DMS electric screwdriver	4
Type of connection	Screw connection	Wire connection cross section AWG, max.	AWG 8
Wire connection cross section AWG, min.	AWG 20	Wire connection cross section, finely stranded, max.	10 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	10 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²
Wire connection cross-section, solid core, max.	16 mm ²	Wire connection cross-section, solid core, min.	0.5 mm ²

Creation date March 22, 2021 10:49:35 AM CET

SAKS 6/GZ 500AC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Display element

Current	1 mA	Type of voltage for indicator	AC
---------	------	-------------------------------	----

Fuse terminals

Cartridge fuse	G-Si. 6.3 x 32	Current	1 mA
Display	Neon lamp	Fuse holder (cartridge holder)	for screw fixing
Operating voltage, max.	500 V	Type of voltage for indicator	AC

General

Installation advice	Direct mounting	Rail	TS 32
Wire connection cross section AWG, max.	AWG 8	Wire connection cross section AWG, min.	AWG 20

Rating data

Power loss in accordance with IEC 60947-7-x	1.82 W	Rated cross-section	10 mm ²
Rated voltage	500 V	Volume resistance according to IEC 60947-7-x	0.56 mΩ
Rated impulse withstand voltage	6 kV		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	8 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	8 AWG
Conductor size Field wiring min. (UR)	22 AWG	Current size C (UR)	8 A
Voltage size C (UR)	600 V		

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD
User Documentation	StorageConditionsTerminalBlocks