


## H10,0/22 EB

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

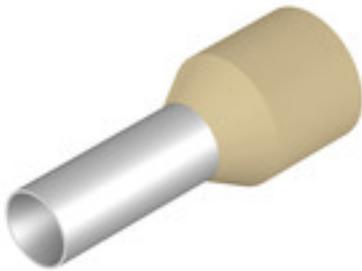

- supplied loose in polybag
- Weidmüller colour code
- DIN colour code
- other colour code

### General ordering data

Version	Wire-end ferrule, insulated, 15 mm, 12 mm, Ivory
Order No.	<a href="#">0534200000</a>
Type	H10,0/22 EB
GTIN (EAN)	4008 190033460
Qty.	100 pc(s).
Packaging	loose

Creation date March 22, 2021 10:49:49 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**H10,0/22 EB****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 0.5 g

**Technical data**

Description of article	Wire end ferrule with plastic collar, ivory	Version	insulated
------------------------	---------------------------------------------	---------	-----------

**Wire-end ferrules**

Collar diameter (D2)	7.6 mm	Colour code	Weidmüller
Conductor cross-section	10 mm <sup>2</sup>	Contact surface diameter (D1)	4.5 mm
Contact surface length (L2)	12 mm	L1 in mm	22 mm
Metal sleeve thickness (S1)	0.2 mm	Military designation	T 20A 025 A
Plastic collar thickness (S2)	0.4 mm	Stripping length	15 mm
Wire connection cross section AWG, max.	AWG 8		

**Classifications**

ETIM 6.0	EC000005	ETIM 7.0	EC000005
ECLASS 9.0	27-40-02-01	ECLASS 9.1	27-40-02-01
ECLASS 10.0	27-40-02-01	ECLASS 11.0	27-40-02-01

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E499744

**Downloads**

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>

**Data sheet**

**H10,0/22 EB**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Drawing**

