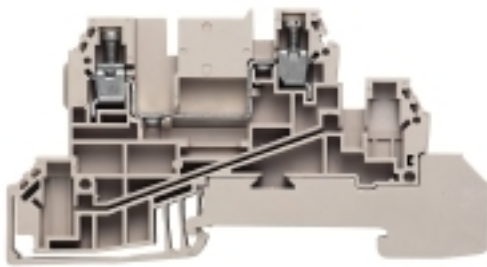


WDL 2.5/L**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Building installation wiring**

For building installations, we offer a complete system that revolves around the 10×3 copper rail and comprises perfectly coordinated components: from installation terminal blocks, neutral conductor terminal blocks and distribution terminal blocks to comprehensive accessories such as busbars and busbar holders.

General ordering data

Version	W-Series, Distributor terminal block with WQV, Rated cross-section: 2.5 mm², Screw connection
Order No.	1030400000
Type	WDL 2.5/L
GTIN (EAN)	4008190055509
Qty.	50 pc(s).
Delivery status	This article will no longer be available in the future.
Available until	2020-12-31
Alternative product	1030300000

Creation date March 22, 2021 3:55:03 PM CET

WDL 2.5/L

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	48 mm	Depth (inches)	1.89 inch
Depth including DIN rail	49 mm	Height	90 mm
Height (inches)	3.543 inch	Net weight	13.9 g
Width	6.1 mm	Width (inches)	0.24 inch

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Version	Screw connection, L connection, for screwable cross-connection, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	1	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on

CSA rating data

Certificate No. (CSA)	12400-296	Current size B (CSA)	10 A
Current size D (CSA)	10 A	Voltage size B (CSA)	300 V
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	2.5 mm ²
---	---------------------

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm
------------	--------------

WDL 2.5/L

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Clampable conductor	Connection specification		Screw connection				
	Cross-section for conductor connection	Type	solid, H05(07) V-U				
		min.	0.5 mm ²				
		max.	4 mm ²				
		nominal	2.5 mm ²				
	wire end ferrule	Stripping length	min.	8 mm			
			max.	8 mm			
			nominal	8 mm			
		Tightening torque	min.	0.4 Nm			
			max.	0.6 Nm			
		Recommended wire-end ferrule					
	Connection specification		Screw connection				
	Cross-section for conductor connection	Type	stranded, H07V-R				
		min.	1.5 mm ²				
		max.	4 mm ²				
		nominal	2.5 mm ²				
	wire end ferrule	Stripping length	min.	8 mm			
			max.	8 mm			
			nominal	8 mm			
		Tightening torque	min.	0.4 Nm			
			max.	0.6 Nm			
		Recommended wire-end ferrule					
	Connection specification		Screw connection				
	Cross-section for conductor connection	Type	flexible, H05(07) V-K				
		min.	0.5 mm ²				
		max.	4 mm ²				
		nominal	2.5 mm ²				
wire end ferrule	Stripping length	min.	8 mm				
		max.	8 mm				
		nominal	8 mm				
	Tightening torque	min.	0.4 Nm				
		max.	0.6 Nm				
	Recommended wire-end ferrule						
Clamping range, max.		4 mm ²					
Clamping range, min.		0.13 mm ²					
Clamping screw		M 2.5					
Connection cross-section, stranded, max.		4 mm ²					
Connection cross-section, stranded, min.		1.5 mm ²					
Connection direction		on side					
Gauge to IEC 60947-1		A3, A4					
Number of connections		1					
Stripping length		8 mm					
Tightening torque, max.		0.6 Nm					
Tightening torque, min.		0.4 Nm					
Torque level with DMS electric screwdriver		1					
Type of connection		Screw connection					
Wire connection cross section AWG, max.		AWG 10					
Wire connection cross section AWG, min.		AWG 26					
Wire connection cross section, finely stranded, max.		4 mm ²					

WDL 2.5/L

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	2.5 mm ²
---	---------------------

Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²
---	---------------------

Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	4 mm ²
---	-------------------

Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²
---	---------------------

Wire connection cross-section, solid core, max.	4 mm ²
---	-------------------

Wire connection cross-section, solid core, min.	0.5 mm ²
---	---------------------

General

Rail	TS 35	Standards	IEC 60947-7-1
Wire connection cross section AWG, max.	AWG 10	Wire connection cross section AWG, min.	AWG 26

Rating data

Power loss in accordance with IEC 60947-7-x	0.77 W	Rated cross-section	2.5 mm ²
Rated voltage	400 V	Rated current	24 A
Current at maximum wires	32 A	Standards	IEC 60947-7-1
Volume resistance according to IEC 60947-7-x	1.33 mΩ	Rated impulse withstand voltage	6 kV
Pollution severity	3		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG	Current size C (UR)	15 A
UL_current_Print	15 A	UL_voltage_Print	300 V
UL_wire_max_Print	12 AWG	UL_wire_min_Print	26 AWG
Voltage size C (UR)	300 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ECLASS 9.0	27-14-11-20	ECLASS 9.1	27-14-11-20
ECLASS 10.0	27-14-11-20	ECLASS 11.0	27-14-11-20

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

WDL 2.5/L

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of
Conformity

[EAC certificate](#)
[NEMKO certificate](#)
[Declaration of Conformity](#)
[Declaration of Conformity](#)

Engineering Data

[STEP](#)

Engineering Data

[EPLAN, WSCAD, Zuken E3.S](#)

User Documentation

[Beipackzettel_WDL.pdf](#)
[StorageConditionsTerminalBlocks](#)

WDL 2.5/L

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

