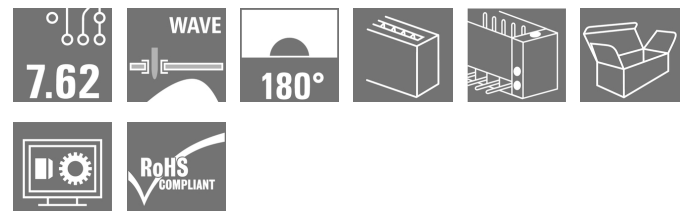


**SV 7.62HP/02/180MF2 3.5SN BK BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Similar to illustration

180° male header with middle flange with a 7.62 pitch.  
Meets the requirements of IEC 61800-5-1 and enables  
UL approval as per UL840 600 V.

Without a female header, the mating profile guarantees  
minimum touch safety of >3 mm with 20 N pressure on  
the test finger.

The automatically locking middle flange which can  
optionally also be screwed, reduces space requirements  
by one pitch width in comparison with conventional  
solutions.

On request: available with screw flange or without flange.

**General ordering data**

|              |                                                                                                                                                                                      |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, male header, closed side,<br>Middle flange, THT solder connection, 7.62 mm,<br>Number of poles: 2, 180°, Solder pin length (l): 3.5<br>mm, tinned, black, Box |
| Order No.    | <a href="#">1048350000</a>                                                                                                                                                           |
| Type         | SV 7.62HP/02/180MF2 3.5SN BK BX                                                                                                                                                      |
| GTIN (EAN)   | 4032248786671                                                                                                                                                                        |
| Qty.         | 78 pc(s).                                                                                                                                                                            |
| Product data | IEC: 1000 V / 57 A<br>UL: 300 V / 40.5 A                                                                                                                                             |
| Packaging    | Box                                                                                                                                                                                  |

Creation date March 22, 2021 8:51:31 PM CET

## SV 7.62HP/02/180MF2 3.5SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |         |                 |            |
|--------------------------|---------|-----------------|------------|
| Depth                    | 11.4 mm | Depth (inches)  | 0.449 inch |
| Height                   | 31.8 mm | Height (inches) | 1.252 inch |
| Height of lowest version | 28.3 mm | Net weight      | 5.86 g     |

## System specifications

|                                                   |                                      |                                              |                                            |
|---------------------------------------------------|--------------------------------------|----------------------------------------------|--------------------------------------------|
| Product family                                    | OMNIMATE Power - series BV/SV 7.62HP | Type of connection                           | Board connection                           |
| Mounting onto the PCB                             | THT solder connection                | Pitch in mm (P)                              | 7.62 mm                                    |
| Pitch in inches (P)                               | 0.3 inch                             | Outgoing elbow                               | 180°                                       |
| Number of poles                                   | 2                                    | Number of solder pins per pole               | 2                                          |
| Solder pin length (l)                             | 3.5 mm                               | Solder pin length tolerance                  | +0.1 / -0.3 mm                             |
| Solder pin dimensions                             | 0.8 x 1.0 mm                         | Solder eyelet hole diameter (D)              | 1.3 mm                                     |
| Solder eyelet hole diameter tolerance (D)+ 0,1 mm |                                      | L1 in mm                                     | 15.24 mm                                   |
| L1 in inches                                      | 0.6 inch                             | Number of rows                               | 1                                          |
| Pin series quantity                               | 1                                    | Touch-safe protection acc. to DIN VDE 57 106 | Touch-safe above the printed circuit board |
| Touch-safe protection acc. to DIN VDE 0470        | IP 20                                | Volume resistance                            | 2.00 mΩ                                    |
| Can be coded                                      | Yes                                  |                                              |                                            |

## Material data

|                                       |                                |                                       |                                |
|---------------------------------------|--------------------------------|---------------------------------------|--------------------------------|
| Insulating material                   | PA GF                          | Colour                                | black                          |
| Colour chart (similar)                | RAL 9011                       | Insulating material group             | II                             |
| Comparative Tracking Index (CTI)      | ≥ 500                          | UL 94 flammability rating             | V-0                            |
| Contact material                      | Copper alloy                   | Contact surface                       | tinned                         |
| Layer structure of solder connection  | 1...3 µm Ni / 4...6 µm Sn matt | Layer structure of plug contact       | 1...3 µm Ni / 4...6 µm Sn matt |
| Storage temperature, min.             | -40 °C                         | Storage temperature, max.             | 70 °C                          |
| Operating temperature, min.           | -50 °C                         | Operating temperature, max.           | 130 °C                         |
| Temperature range, installation, min. | -25 °C                         | Temperature range, installation, max. | 130 °C                         |

## Rated data acc. to IEC

|                                                                           |                        |                                                                       |                   |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|-------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 57 A              |
| Rated current, max. number of poles (Tu=20°C)                             | 41 A                   | Rated current, min. number of poles (Tu=40°C)                         | 41 A              |
| Rated current, max. number of poles (Tu=40°C)                             | 41 A                   | Rated voltage for surge voltage class / pollution degree II/2         | 1,000 V           |
| Rated voltage for surge voltage class / pollution degree III/2            | 630 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 630 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 6 kV                   | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 6 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 6 kV                   | Short-time withstand current resistance                               | 3 x 1s with 420 A |

## SV 7.62HP/02/180MF2 3.5SN BK BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to CSA

Institute (CSA)



Certificate No. (CSA)

200039-1121690

Rated voltage (Use group B / CSA) 300 V

Rated voltage (Use group C / CSA) 300 V

Rated voltage (Use group D / CSA) 600 V

Rated current (Use group B / CSA) 35 A

Rated current (Use group C / CSA) 35 A

Rated current (Use group D / CSA) 5 A

Reference to approval values

Specifications are maximum values, details - see approval certificate.

## Rated data acc. to UL 1059

Institute (cURus)



Certificate No. (cURus)

E60693

Rated voltage (Use group B / UL 1059) 300 V

Rated voltage (Use group C / UL 1059) 300 V

Rated voltage (Use group D / UL 1059) 600 V

Rated current (Use group B / UL 1059) 40.5 A

Rated current (Use group C / UL 1059) 40.5 A

Rated current (Use group D / UL 1059) 5 A

Clearance distance, min. 6.9 mm

Creepage distance, min. 9.6 mm

Reference to approval values

Specifications are maximum values, details - see approval certificate.

## Packing

Packaging Box

VPE length 82 mm

VPE width 95 mm

VPE height 160 mm

## Classifications

ETIM 6.0 EC002637

ETIM 7.0 EC002637

ECLASS 9.0 27-44-04-02

ECLASS 9.1 27-44-04-02

ECLASS 10.0 27-44-04-02

ECLASS 11.0 27-46-02-01

## Important note

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

Notes

- Additional colours on request
- Rated current related to rated cross-section & min. No. of poles.
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- MFX and MSFX: X= Position of the middle flange e.g. MF2, MSF3
- Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

## SV 7.62HP/02/180MF2 3.5SN BK BX

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Approvals

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

|                       |        |
|-----------------------|--------|
| UL File Number Search | E60693 |
|-----------------------|--------|

### Downloads

Approval/Certificate/Document of  
Conformity

[Declaration of the Manufacturer](#)


Engineering Data

[EPLAN, WSCAD](#)

**SV 7.62HP/02/180MF2 3.5SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

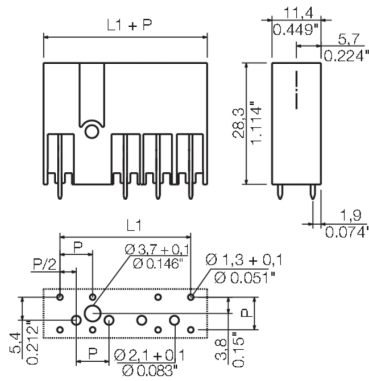**Drawings**
**Dimensional drawing**


|                |                                  |                                                                                     |   |   |   |   |   |   |
|----------------|----------------------------------|-------------------------------------------------------------------------------------|---|---|---|---|---|---|
| 6              | M(S)F6                           | o                                                                                   | o | o | o | o | X | o |
| 6              | M(S)F5                           | o                                                                                   | o | o | o | X | o | o |
| 6              | M(S)F4                           | o                                                                                   | o | o | X | o | o | o |
| 6              | M(S)F3                           | o                                                                                   | o | X | o | o | o | o |
| 6              | M(S)F2                           | o                                                                                   | X | o | o | o | o | o |
| 5              | M(S)F5                           | o                                                                                   | o | o | o | X | o |   |
| 5              | M(S)F4                           | o                                                                                   | o | o | X | o | o |   |
| 5              | M(S)F3                           | o                                                                                   | o | X | o | o | o |   |
| 5              | M(S)F2                           | o                                                                                   | X | o | o | o | o |   |
| 4              | M(S)F4                           | o                                                                                   | o | o | X | o |   |   |
| 4              | M(S)F3                           | o                                                                                   | o | X | o | o |   |   |
| 4              | M(S)F2                           | o                                                                                   | X | o | o | o |   |   |
| 3              | M(S)F3                           | o                                                                                   | o | X | o |   |   |   |
| 3              | M(S)F2                           | o                                                                                   | X | o | o |   |   |   |
| 2              | M(S)F2                           | o                                                                                   | X | o |   |   |   |   |
| NO OF<br>POLES | X = MIDDLE<br>FLANGE<br>POSITION | 1                                                                                   | 2 | 3 | 4 | 5 | 6 | 7 |
|                |                                  |  |   |   |   |   |   |   |

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. Weidmüller exclusively reserves the right to file for patents, utility models or designs.





© Weidmüller Interface GmbH & Co. KG

Dimensions without tolerances are no check dimensions

The English version is binding

allgemeingültige Kundenzeichnung, aktueller Stand nur auf Anfrage /  
general customer drawing, topical version only if required

SHOWN: SV 7.62HP/04/90MSF

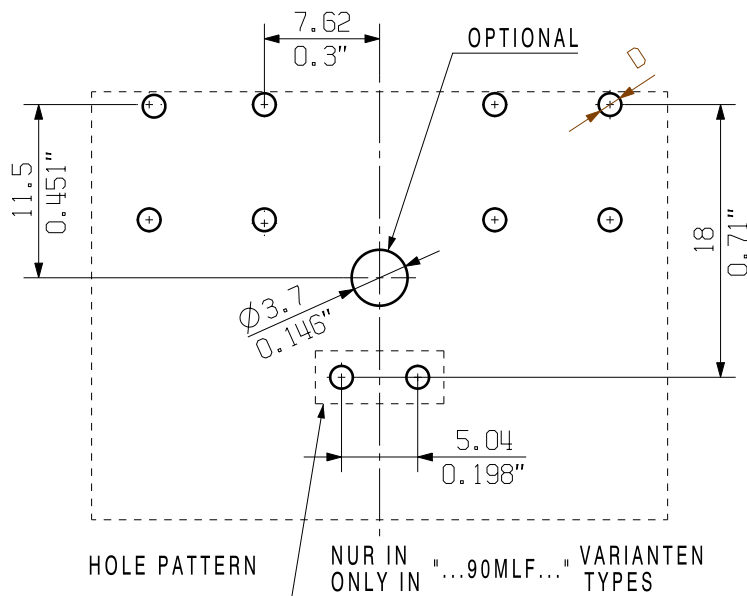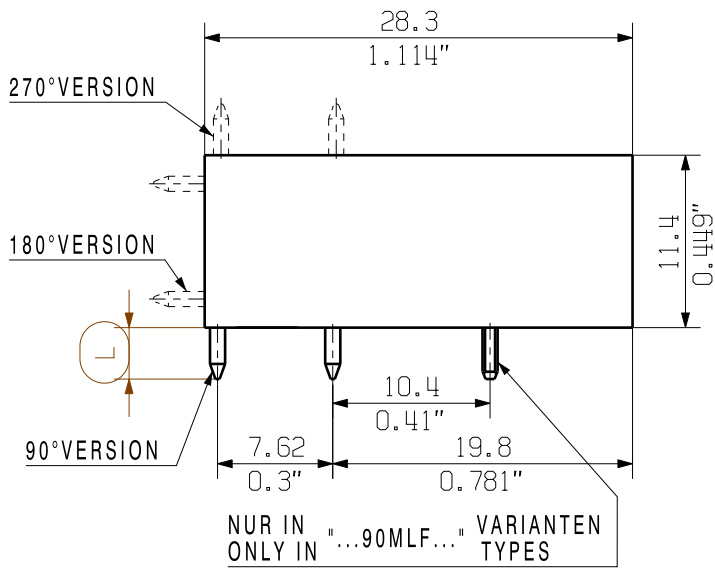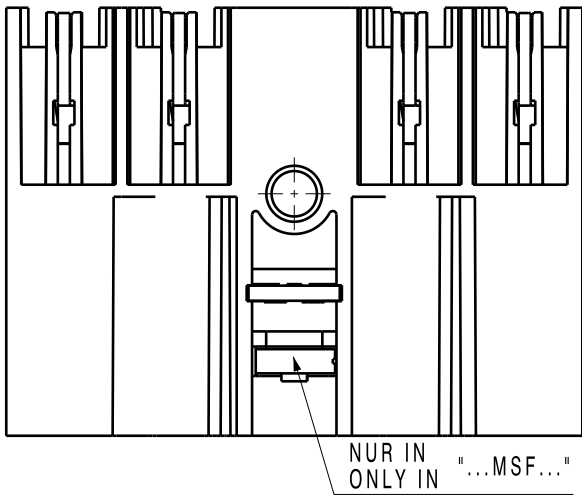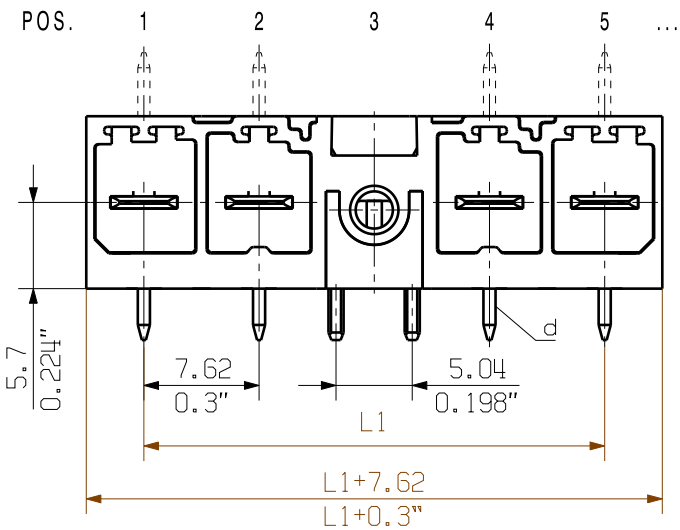

MF= Mittelflansch  
middle flange  
MSF= Mittelschraubflansch  
middle flange with screw  
MLF= Mittellötflansch  
middle solder flange

For the mounting of PCBs, it should be noted that the rated data relates only to the PCB components alone.  
The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110.  
The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application.  
Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

GENERAL TOLERANCE:  
DIN ISO 2768-m



Scale: 2:1

Supersedes: .

100459/5

12.06.18 HELIS\_MA

00

Modification

Drawn

Date

Name

Responsible

Checked

Approved

24.02.2009

HELIS\_MA

KRUG\_M

10.07.2018

HERTEL\_S

LANG\_T

**Weidmüller**



3 49530 19

Drawing no. Issue no.

Sheet 01 of 01 sheets

**SV 7.62HP...M(S/L)F...**

STIFTSLEISTE  
MALE HEADER

Product file: SV/BVZ 7.62HP

7340

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.

We reserve the right to make technical changes.