

IE-CD-V14MHYB-10P-FJ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Junction box, design for FreeCon PushPull plug-in connectors ver.14 according to IEC 61076-3-117, metal with hybrid 10-pole Insert

General ordering data

Version	Junction box, FreeCon, Hybrid, Module, IP65
Order No.	1068850000
Type	IE-CD-V14MHYB-10P-FJ
GTIN (EAN)	4032248823925
Qty.	1 pc(s).

IE-CD-V14MHYB-10P-FJ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	100 mm	Depth (inches)	3.937 inch
Height	52 mm	Height (inches)	2.047 inch
Net weight	372 g	Width	41 mm
Width (inches)	1.614 inch		

Temperatures

Storage temperature	-40 °C...75 °C	Operating temperature	-40 °C...70 °C
---------------------	----------------	-----------------------	----------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

General data

Colour	silver	Housing main material	Aluminium profile, Cover: die-cast zinc, nickel plated
Protection degree	IP65	Type of mounting	2 screws, for exposed connections
UL 94 flammability rating	V-0		

General standards

Certificate no. (cULus)	E316369	Connector standard	IEC 61076-3-117 Var. 14
-------------------------	---------	--------------------	-------------------------

Technical specifications for hybrid connector

Contact material (hybrid connector)	Copper alloy	Contact resistance (hybrid connector)	≤ 10 mΩ
Contact surface (hybrid connector)	Gold over nickel	Housing base material (hybrid connector)	Zinc diecast (flange), PA 66
Material of seal (hybrid connector)	NBR	Plugging cycles (hybrid connector)	500
Pole count	10	Protection degree (hybrid connector)	IP65
Rated current (hybrid connector)	3 A per contact	Rated voltage (DIN EN 61984) (hybrid connector)	24 V
Shielding (hybrid connector)	360° shield contact	Wire connection cross section, finely stranded, max. (hybrid connector)	0.75 mm ²
Wire connection cross section, finely stranded, min. (hybrid connector)	0.08 mm ²	Wire cross-section, finely stranded, max. (AWG) (hybrid connector)	AWG 20
Wire cross-section, finely stranded, min. (AWG) (hybrid connector)	AWG 27		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ECLASS 9.0	27-44-02-02	ECLASS 9.1	27-44-03-92
ECLASS 10.0	27-44-02-02	ECLASS 11.0	27-44-02-02

IE-CD-V14MHYB-10P-FJ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS	Conform
UL File Number Search	E316369

Downloads

Approval/Certificate/Document of Conformity	DUXR.E316369 PROFINET Manufacturer's Declaration
Engineering Data	EPLAN.WSCAD
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN


IE-CD-V14MHYB-10P-FJ

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com


Drawings

Dimensioned drawing

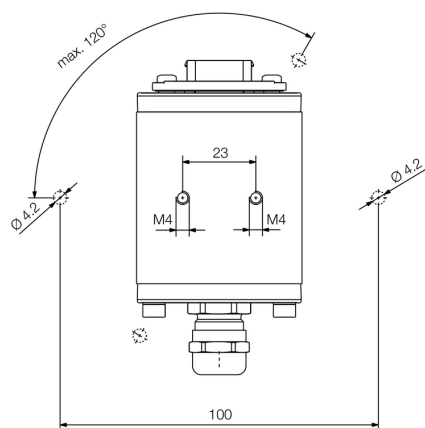


Bottom view

Dimensioned drawing




Front view

Dimensioned drawing

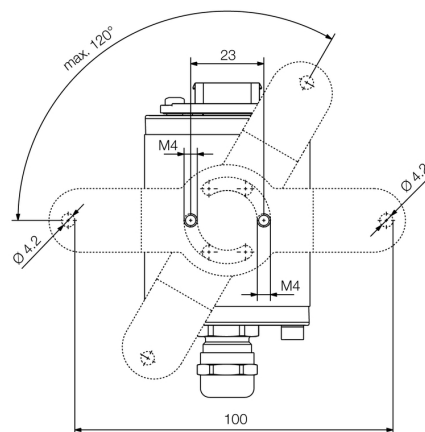

Bottom view with mounting foot

Dimensioned drawing



Side view