

IE-CD-V14MRJ-FJ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Junction box / coupling, design for FreeCon PushPull
plug-in connectors ver.14 according to IEC 61076-3-117

General ordering data

Version	Junction box, FreeCon, RJ45 module, IP65
Order No.	1068880000
Type	IE-CD-V14MRJ-FJ
GTIN (EAN)	4032248824021
Qty.	1 pc(s).

IE-CD-V14MRJ-FJ

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	100 mm	Depth (inches)	3.937 inch
Height	52 mm	Height (inches)	2.047 inch
Net weight	361 g	Width	41 mm
Width (inches)	1.614 inch		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

General data

Colour	silver	Housing main material	Aluminium profile, Cover: die-cast zinc, nickel plated
Protection degree	IP65	Wiring	PROFINET

General standards

Certificate no. (cULus)	E316369	Connector standard	IEC 61076-3-117 Var. 14, IEC 60603-7-5
IP protection classes	IEC 60529	UL standard for communication accessories	UL 1863

Technical data RJ45 module

Category (RJ45 module)	Cat.5 (ISO/IEC 11801)	Colour (RJ45 module)	silver
Connection 1 (RJ45 module)	IDC	Connection 2 (RJ45 module)	RJ45
Contact resistance (RJ45 module)	≤ 20 mΩ	Contact surface (RJ45 module)	Gold over nickel
Current capacity (RJ45 module)	1 A	Dielectric strength, contact - contact (RJ45 module)	≤ 1000 V DC
Dielectric strength, contact - shielding (RJ45 module)	≤ 1500 V DC	Housing base material (RJ45 module)	Zinc diecast, nickel-plated
Insulation resistance (RJ45 module)	> 500 MΩ	Plugging cycles (RJ45 module)	750
Plugging force (RJ45 module)	≤ 30 N	Sheath diameter, max. (RJ45 module)	10 mm
Sheath diameter, min. (RJ45 module)	5 mm	Shielding (RJ45 module)	360° shield contact
Wire cross-section, finely stranded, max. (AWG)	AWG 22	Wire cross-section, finely stranded, min. (AWG)	AWG 26
Wiring	PROFINET		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
ECLASS 9.0	27-44-02-02	ECLASS 9.1	27-44-03-92
ECLASS 10.0	27-44-02-02	ECLASS 11.0	27-44-02-02

IE-CD-V14MRJ-FJ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS	Conform
UL File Number Search	E316369

Downloads

Approval/Certificate/Document of Conformity	ISO/IEC and TIA/EIA DE ISO/IEC EN and TIA/EIA Screened Class E Category 6, 3 connector permanent link ISO/IEC EN and TIA/EIA Screened Class E Category 6, 4 connector channel ISO/IEC EN and TIA/EIA Screened Class EA Category 6A, 2 connector channel DUXR.E316369 Compliance Statement Screened Category 6 ISO/IEC EN and TIA/EIA Connecting Hardware PROFINET Manufacturer's Declaration
Engineering Data	WSCAD
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN


IE-CD-V14MRJ-FJ

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings


Dimensioned drawing

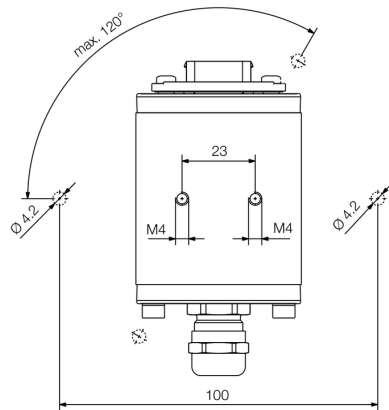

Bottom view


Dimensioned drawing

Dimensioned drawing

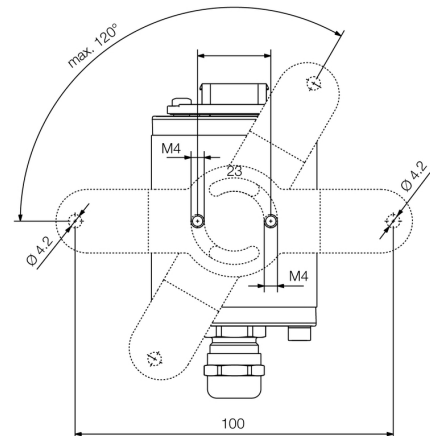


Bottom view with mounting foot

Dimensioned drawing



Front view



Side view