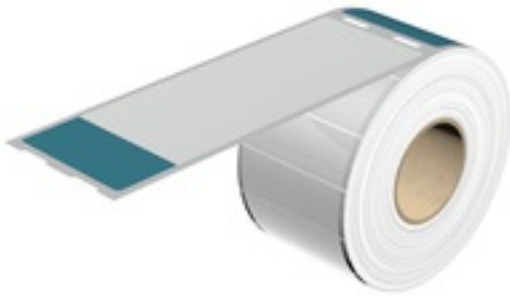


**THM WO 50.8/150 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Similar to illustration

THM WriteOn cable markers on reels are used for labelling conductors and cables with an outside diameter of up to 36 mm. The transparent adhesive strip fixes and protects the printing on the marker surface.

- Protection of the marking against dirt and abrasion by wrapping it with the transparent adhesive strip
- Simple and quick printing with the high-quality thermal transfer printers

**General ordering data**

|            |                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------|
| Version    | THM, Conductor and cable markers, 39.7 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, blue |
| Order No.  | <a href="#">1109190000</a>                                                                                        |
| Type       | THM WO 50.8/150 BL                                                                                                |
| GTIN (EAN) | 4032248885626                                                                                                     |
| Qty.       | 1 pc(s).                                                                                                          |

Creation date March 23, 2021 12:30:02 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## THM WO 50.8/150 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 0.025 mm   | Depth (inches)  | 0.001 inch |
| Height         | 50.8 mm    | Height (inches) | 2 inch     |
| Net weight     | 610 g      | Width           | 150 mm     |
| Width (inches) | 5.905 inch |                 |            |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...125 °C |
|-----------------------------|--------------|

## General data

|                                              |                       |                                   |                                            |
|----------------------------------------------|-----------------------|-----------------------------------|--------------------------------------------|
| Adhesive                                     | Polyacrylate adhesive | Colour                            | blue                                       |
| Halogen                                      | No                    | Material                          | Polyester film                             |
| Material colour according to resistance code | 6                     | Number of markers per combination | 1 Label reel = Conductor and cable markers |
| Number per roll                              | 500                   | Operating temperature range       | -40...125 °C                               |
| Operating temperature range, max.            | 125 °C                | Operating temperature range, min. | -40 °C                                     |
| Size of labelling field                      | 25.4 x 50.8 mm        | Type of printing                  | neutral                                    |
| UL 94 flammability rating                    | V-0                   | Version                           | Self-adhesive                              |
| Width                                        | 150 mm                |                                   |                                            |

## Conductor and cable markers

|                                  |                            |                               |                      |
|----------------------------------|----------------------------|-------------------------------|----------------------|
| Conductor O.D.                   | 39.7 mm                    | Conductor O.D., max.          | 39.7 mm              |
| Conductor cross-section, max.    | 500 mm <sup>2</sup>        | Conductor cross-section, min. | 0.75 mm <sup>2</sup> |
| Cross-section for connected wire | 0.75 - 500 mm <sup>2</sup> | Halogen                       | No                   |
| Text field height                | 25.4 mm                    | Text field width              | 50.8 mm              |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ECLASS 9.0  | 27-40-04-01 | ECLASS 9.1  | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                              |
|------------------|------------------------------|
| Engineering Data | <a href="#">STEP</a>         |
| Engineering Data | <a href="#">EPLAN, WSCAD</a> |

### THM WO 50.8/150 BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

