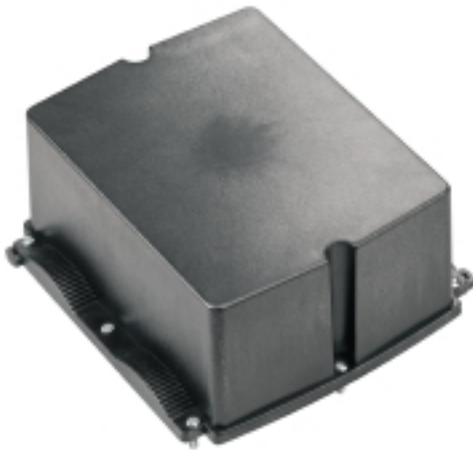


BG GHDE 10P HO PT6**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The FieldPower® housings are highly robust and meet the highest UL flammability class 5 VA.

- The "TS 35 PT6" mounting rail module and PT6 contact unit are easy to snap on.
- Hinged seals allow pre-assembled plug cables to also be used.
- The high cover versions enable the device to be installed.

For cable seals consult accessories.

General ordering data

Version	Enclosures, IP65 with corresponding housing, Polycarbonate, GF 10
Order No.	1121950000
Type	BG GHDE 10P HO PT6
GTIN (EAN)	4032248903016
Qty.	10 pc(s).

BG GHDE 10P HO PT6**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Dimensions and weights**

Depth	87 mm	Depth (inches)	3.425 inch
Height	181 mm	Height (inches)	7.126 inch
Net weight	394.77 g	Width	192 mm
Width (inches)	7.559 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
---------------------	----------------	-----------------------	----------------

Classifications

ETIM 6.0	EC000747	ETIM 7.0	EC000747
ECLASS 9.0	27-18-22-04	ECLASS 9.1	27-18-92-90
ECLASS 10.0	27-18-22-04	ECLASS 11.0	27-18-22-04

Approvals

Approvals



ROHS	Conform
UL File Number Search	E310075

Downloads

Approval/Certificate/Document of Conformity	FieldPower
Engineering Data	EPLAN, WSCAD

BG GHDE 10P HO PT6

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Drilling template

