

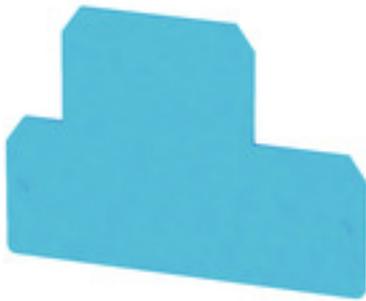
**WAP WDK10 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

**General ordering data**

Version	W-Series, End plate
Order No.	<a href="#">1186730000</a>
Type	WAP WDK10 BL
GTIN (EAN)	4050118024678
Qty.	20 pc(s).

Creation date March 23, 2021 7:48:09 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**WAP WDK10 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	60.85 mm	Depth (inches)	2.396 inch
Height	85 mm	Height (inches)	3.346 inch
Net weight	6.88 g	Width	1.5 mm
Width (inches)	0.059 inch		

**Temperatures**

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

**Material data**

Material	Wemid	Colour	blue
UL 94 flammability rating	V-0		

**System specifications**

Version	End plate
---------	-----------

**Classifications**

ETIM 6.0	EC000886	ETIM 7.0	EC000886
ECLASS 9.1	27-14-11-33	ECLASS 10.0	27-14-11-33
ECLASS 11.0	27-14-11-33		

**Approvals**

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>