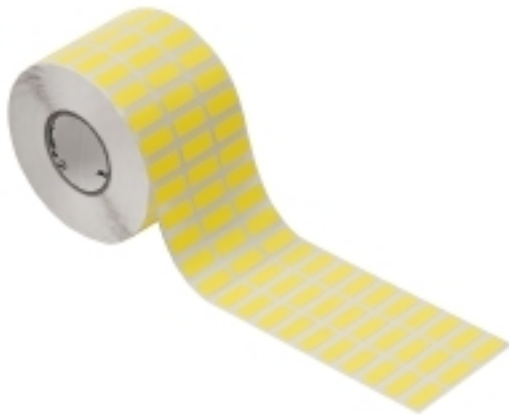


THM MT30X 101/48 GE/G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

The THM labels offer brilliant printing quality thanks to the thermal transfer technology. Different materials and the user-friendly printing system under Windows optimise every marking effort.

- High-quality polyester labels in various colours or inexpensive paper labels are available
- Labels are automatically positioned in the printer for perfectly centred prints on each label.

General ordering data

Version	THM, Device markers, {Reference (AttributeDefinition) not found: pAttr74196859207437}, yellow
Order No.	1192740000
Type	THM MT30X 101/48 GE/G
GTIN (EAN)	4032248974689
Qty.	1 pc(s).
compatible printer	2599430000 2599440000

Creation date March 23, 2021 8:00:14 AM CET

THM MT30X 101/48 GE/G**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	0.08 mm	Depth (inches)	0.003 inch
Height	48 mm	Height (inches)	1.89 inch
Net weight	548 g	Width	101 mm
Width (inches)	3.976 inch		

Temperatures

Operating temperature range	-40...80 °C
-----------------------------	-------------

General data

Adhesive	Polyacrylate adhesive	Approval acc. to UL 969	No
Colour	yellow	Halogen	No
Material	Vinyl film	Number of markers per combination	1 Label reel = Device markers
Number per roll	500	Operating temperature range	-40...80 °C
Operating temperature range, max.	80 °C	Operating temperature range, min.	-40 °C
Printing method	Thermal transfer	UL 94 flammability rating	V-0
Version	Self-adhesive, halogen-free	Width	101 mm

Device markers

Halogen	No
---------	----

Classifications

ETIM 6.0	EC001288	ETIM 7.0	EC001288
ECLASS 9.0	27-40-06-29	ECLASS 9.1	27-40-06-29
ECLASS 10.0	27-40-06-29	ECLASS 11.0	27-28-11-04

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Engineering Data	EPLAN, WSCAD