

SAIL-M8GRJ45-4S3.0UIE

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

Version	Bus line, Number of poles: 4, pin, straight, RJ45, Shielded: Yes, Sheath material: PUR, Halogen: None, No
Order No.	1201210300
Type	SAIL-M8GRJ45-4S3.0UIE
GTIN (EAN)	4050118553932
Qty.	1 pc(s).

Creation date March 23, 2021 8:38:32 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAIL-M8GRJ45-4S3.0UIE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 102 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Acceleration	5 m/s ²	
Bending cycles	5 Mio	
Bending radius, min., moving	7.5 x cable diameter	
Bending radius, min., stationary	4 x cable diameter	
Colour coding	blue, orange, white / blue, white / orange	
Core cross-section	0.15 mm ²	
Halogen	None, No	
Insulation	None, PP	
Number of poles	4	
Number of poles	4	
Outer cladding in accordance with UL AWM style	20963 (80 °C / 30 V)	
Outer diameter	4.8 - 0.3 mm	
Outside diameter	Diameter	4.8 mm
	Signs	±
	Tolerance	0.3 mm
Outside diameter	4.8 mm ± 0.3 mm	
Sheath material	PUR	
Sheathing colour	green	
Shielded	Yes	
Speed	180 m/min	
Suitable for cable carriers	Yes	
Temperature range, stationary	-40...80 °C	
Temperature range, stationary, max.	80 °C	
Temperature range, stationary, min.	-40 °C	

General technical data

Temperature range of housing	-25...+80 °C	Threaded ring material	Brass, nickel-plated
Tightening torque	M8: 0.5 - 0.6 Nm	Version	pin, straight, RJ45
jumpered	No		

Cable structure

Colour coding	blue, orange, white / blue, white / orange	Insulation	None, PP
Sheathing colour	green		

Electrical properties of cable

Speed 180 m/min

Mechanical and material properties of cable

Acceleration	5 m/s ²	Bending cycles	5 Mio
Halogen	None, No	Speed	180 m/min

Creation date March 23, 2021 8:38:32 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAIL-M8GRJ45-4S3.0UIE

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
------------------	----------------------


SAIL-M8GRJ45-4S3.0UIE

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Dimensioned drawing

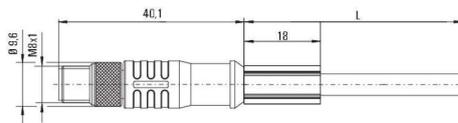


Male, straight

Pole scheme

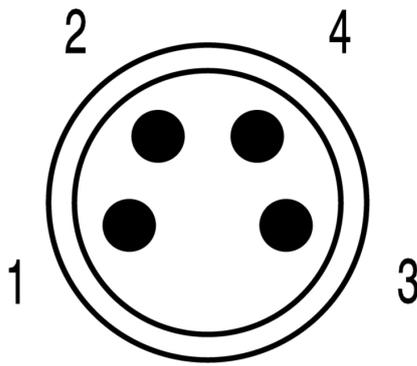


Pin

Wiring diagram

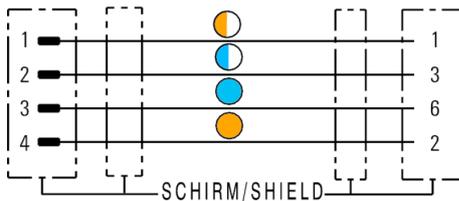

Dimensioned drawing



Pole scheme

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F