

**IE-C6FP8LD0010M40V40-D**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com



Assembled IE cables, patch cable Cabinet Line, Cat. 6,  
LSZH, grey, 90° angled on one side

**General ordering data**

Version	Patch cable, RJ45 IP 20, Angled 90°, RJ45 IP 20, Cat.6 <sub>A</sub> / Class E <sub>A</sub> (ISO/IEC 11801 2010), LSZH, 1 m
Order No.	<a href="#">1248280010</a>
Type	IE-C6FP8LD0010M40V40-D
GTIN (EAN)	4050118044706
Qty.	1 pc(s).

Creation date March 23, 2021 12:24:48 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**IE-C6FP8LD0010M40V40-D****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Length	1 m	Length (inches)	39.37 inch
Net weight	54 g		

**Temperatures**

Storage temperature	-20 °C...60 °C	Operating temperature	-20 °C...60 °C
Installation temperature	0 °C...50 °C		

**Cable specific standards**

Application-specific communication cable facilities	ANSI / TIA / EIA-568-B.2-10, ISO / IEC 11801:2002, EN50173-1:2007
---	---

**Electrical properties**

Current-carrying capacity at 50 °C	1 A	PoE / PoE+	conforming to IEEE 802.3at
------------------------------------	-----	------------	----------------------------

**General standards**

Certificate no. (cULus)	E316369	Connector standard	IEC 60603-7-51
-------------------------	---------	--------------------	----------------

**Standards**

Application-specific communication cable facilities	ANSI / TIA / EIA-568-B.2-10, ISO / IEC 11801:2002, EN50173-1:2007	Connector standard	IEC 60603-7-51
---	---	--------------------	----------------

**Cable structure**

Arrangement of wire cores	Twisted pair	Colour sequence or wires - wire pairs	white - blue, white - orange, white - green, white - brown
Complete shielding	Shielding braid made from copper wiring	Copper diameter	0.43 mm
Cross-section	4*2*AWG 27/7 - 4*2*0.1 mm <sup>2</sup>	Insulation	PE
Insulation cross-section	1.04 mm	Material sheath	LSZH
Number of wires	8	Overlap of shielding braid	60 %
Sheath diameter, max.	5.9 mm	Sheath diameter, min.	5.5 mm
Shielding	S/FTP	Strands	7

**Electrical properties of cable**

Capacity at 1 kHz	46 nF/km
Category	Cat.6 <sub>A</sub> / Class E <sub>A</sub> (ISO/IEC 11801 2010)
Characteristic impedance	100 ± 15 Ω at 1–100 MHz
Coupling attenuation up to 1000 MHz	80 dB
Coupling resistance at 10 MHz	5 mΩ/m
Deviation	25 ns/100m
Operating voltage	50 V DC

Creation date March 23, 2021 12:24:48 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

2

**IE-C6FP8LD0010M40V40-D****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

Operating voltage (UL rating)	Voltage type	AC
	Operating voltage	30 V
	Voltage type	DC
	Operating voltage	42.4 V
Operating voltage (UL rating)	30 V AC / 42.4 V DC	
Operating voltage, UL	30 V AC / 42.4 V DC	
Resistance differential	5 %	
Separating class according to EN 50174-2	d	
Speed	10 GBit/s	
Test voltage: wire-wire-shield	750 V DC, 1 min	

**Mechanical and material properties of cable**

Colour	grey	Halogen	halogen-free, according to IEC 60754-2
Min. bending radius, once only	25 mm	Min. bending radius, repetitive	50 mm
Resistance to spread of flame	in accordance with IEC 60332-2-2, in accordance with IEC 60332-1-2, in accordance with IEC 60332-3-24, in accordance with UL 2556 (FT1)	Speed	10 GBit/s

**Plug, left**

Connector left	RJ45 IP 20, Angled 90°
----------------	------------------------

**Plug, right**

Connector right	RJ45 IP 20	Contact surface	Au ≥ 0.8 µm
Housing main material	PC UL 94 V0	Plugging cycles	750

**plug**

Connector left	RJ45 IP 20, Angled 90°	Connector right	RJ45 IP 20
----------------	------------------------	-----------------	------------

**Classifications**

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E316369

Creation date March 23, 2021 12:24:48 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

3

**IE-C6FP8LD0010M40V40-D****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Downloads**

Approval/Certificate/Document of Conformity	<a href="#">ISO/IEC EN and TIA/EIA Screened Class EA Category 6A, 2 connector channel DUXR.E316369</a>
Engineering Data	<a href="#">STEP</a>
Product Change Notification	<a href="#">PCN-PB47-20180213-00-A_EN</a> <a href="#">PCN-PB47-20180213-00-A_DE</a>
User Documentation	<a href="#">MAN IE GUIDE DE</a> <a href="#">MAN IE GUIDE EN</a>

**IE-C6FP8LD0010M40V40-D**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**

**Wiring**

RJ45	1	white (orange)	1	RJ45
	2	orange	2	
	3	white (green)	3	
	4	blue	4	
	5	white (blue)	5	
	6	green	6	
	7	white (brown)	7	
	8	brown	8	

**Dimensioned drawing**

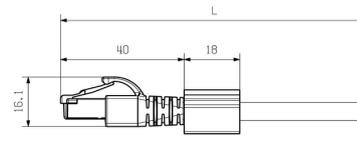

**Dimensioned drawing**

