

## SAIL-7/8G-5-10U


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The 7/8" cables tend to be used for power supply applications.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

### General ordering data

Version	Sensor/actuator line, One end without connector, 7/8", Number of poles : 5 (4 + PE), 10 m, pin, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
Order No.	<a href="#">1292171000</a>
Type	SAIL-7/8G-5-10U
GTIN (EAN)	4050118088175
Qty.	1 pc(s).

Creation date March 23, 2021 2:48:06 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**SAIL-7/8G-5-10U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 600 g

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Technical specifications for cable**

Bending radius, min., moving	7.5 x cable diameter		
Cable length	10 m		
Colour coding	brown, white, blue, black, Green/yellow		
Configurable cable length	No		
Core cross-section	1.5 mm <sup>2</sup>		
Halogen	No		
Housing main material	PUR		
Insulation	TPM		
Number of poles	5		
Number of poles	5 (4 + PE)		
Outer cladding in accordance with UL AWM style	20234 (80 °C / 1000 V)		
Outer diameter	8.7 mm		
Outside diameter	Diameter	8.7 mm	
	Signs	±	
	Tolerance	0.2 mm	
Outside diameter	8.7 mm ± 0.2 mm		
PE function	Yes		
Resistant to welding beads	No		
Sheath material	PUR		
Sheathing colour	black		
Shielded	No		
Suitable for cable carriers	No		
Temperature range, moving	-20...80 °C		
Temperature range, moving, max.	80 °C		
Temperature range, moving, min.	-20 °C		
Temperature range, stationary	-50...80 °C		
Temperature range, stationary, max.	80 °C		
Temperature range, stationary, min.	-50 °C		
Torsion resistance	0 °/m		

**General technical data**

Coding	none	Connection thread	7/8"
Contact surface	Au (Gold)	Housing main material	PUR
Insulation strength	10 <sup>8</sup> Ω	LED	No
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP68, when screwed in	Rated current	9 A
Rated voltage	300 V	Temperature range of housing	-25...+80 °C
Threaded ring material	Diecast zinc	Version	pin, straight
jumpered	No		

**SAIL-7/8G-5-10U**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Classifications**

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-11	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-11	ECLASS 11.0	27-06-03-11

**Approvals**

Approvals



ROHS	Conform
UL File Number Search	E307231

**Downloads**

Engineering Data	<a href="#">EPLAN, WSCAD</a>
------------------	------------------------------

**Data sheet**


**SAIL-7/8G-5-10U**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com


**Drawings**

**Dimensioned drawing**

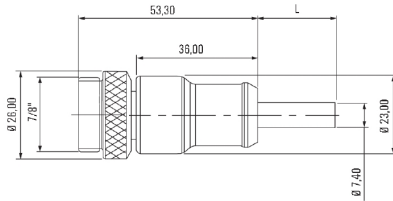


Male, straight

**Pole scheme**



Male

**Wiring diagram**



**The ideal tool: Screwty<sup>®</sup> with torque function**



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F