

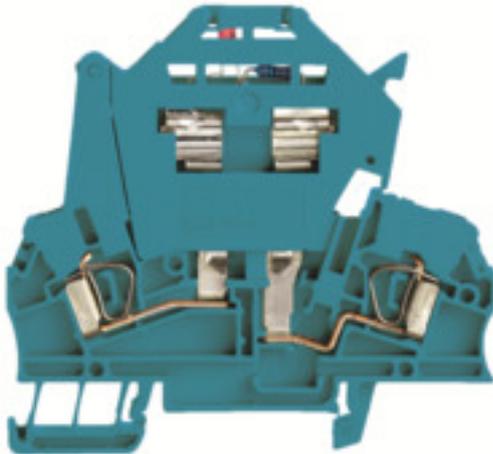
ZSI 2.5/LD 28AC BL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Spring connection with tension clamp Technology**

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Version	Z-series, Fuse terminal, Rated cross-section: 2.5 mm ² , Tension-clamp connection
Order No.	1334480000
Type	ZSI 2.5/LD 28AC BL
GTIN (EAN)	4050118137590
Qty.	50 pc(s).

Creation date March 23, 2021 4:31:03 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

ZSI 2.5/LD 28AC BL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	73 mm	Depth (inches)	2.874 inch
Depth including DIN rail	74 mm	Height	79.5 mm
Height (inches)	3.13 inch	Net weight	19.63 g
Width	7.9 mm	Width (inches)	0.311 inch

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50
Continuous operating temp., max.	120		

Material data

Material	Wemid	Colour	blue
UL 94 flammability rating	V-0		

System specifications

Version	Tension-clamp connection, Fuse cartridge, with LED, for plug-in cross-connector, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35	N-function	Yes
PE function	No	PEN function	No

Additional technical data

Type of mounting	Snap-on
------------------	---------

Conductors for clamping (rated connection)

Number of connections	2	Type of connection	Tension-clamp connection
-----------------------	---	--------------------	--------------------------

Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Power loss for overload and short-circuit protection for a composite arrangement	1.6 W at 6.3 A @ 41°C
Power loss for overload and short-circuit protection for an individual arrangement	2.5 W at 2.5 A @ 27°C	Power loss for short-circuit protection only for a composite arrangement	2.5 W at 6.3 A @ 55°C
Power loss for short-circuit protection only for an individual arrangement	4.0 W at 6.3 A @ 52°C		

General

Rail	TS 35
------	-------

Rating data

Power loss in accordance with IEC 60947-7-x	0.77 W	Rated cross-section	2.5 mm ²
Rated voltage	28 V	Rated voltage to adjoining terminal	500 V
Rated current	6.3 A	Volume resistance according to IEC 60947-7-x	1.33 mΩ

Creation date March 23, 2021 4:31:03 PM CET

Data sheet

ZSI 2.5/LD 28AC BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	CB Test Certificate CB Certificate EAC certificate
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD
User Documentation	Beipackzettel_SAKS_GL_LD.pdf StorageConditionsTerminalBlocks