

UR20-FBC-PB-DP**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****More performance. Simplified.
u-remote.**

Weidmüller u-remote – our innovative remote I/O concept with IP 20 which focuses purely on user benefits: tailored planning, faster installation, safer start-up, no more downtime. For considerably improved performance and greater productivity.

Reduce the size of your cabinets with u-remote, thanks to the narrowest modular design on the market and the need for fewer power-feed modules. Our u-remote technology also offers tool-free assembly, while the modular "sandwich" design and integrated web server speed up installation, both in the cabinet and machine. Status LEDs on the channel and each u-remote module enable reliable diagnosis and rapid service.

This and many other amazing ideas boost the availability of your machines and systems. And ensure smooth processes too. From planning to operation.

u-remote stands for "More Performance". Simplified

General ordering data

Version	Remote I/O fieldbus coupler, IP20, PROFIBUS DP-V1
Order No.	1334870000
Type	UR20-FBC-PB-DP
GTIN (EAN)	4050118138245
Qty.	1 pc(s).
Packaging	Cardboard box
Delivery status	This article will no longer be available in the future.
Available until	2019-04-30
Alternative product	2614380000

UR20-FBC-PB-DP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	76 mm	Depth (inches)	2.992 inch
Height	120 mm	Height (inches)	4.724 inch
Mounting dimension - height	128 mm	Net weight	310 g
Weight	247 g	Width	52 mm
Width (inches)	2.047 inch		

Temperatures

Storage temperature	-40 °C ... +85 °C	Operating temperature	-20 °C ... +60 °C
Humidity	10...90 %, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection data

Type of connection	PUSH IN	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire connection cross section, finely stranded, min.	0.14 mm ²	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, solid, max.	1.5 mm ²
Wire cross-section, solid, max. (AWG)	AWG 16	Wire cross-section, solid, min.	0.14 mm ²
Wire cross-section, solid, min. (AWG)	AWG 26		

General data

Air humidity (operation)	10% to 95%, non-condensing as per DIN EN 61131-2		
Air humidity (storage)	10% to 95%, non-condensing as per DIN EN 61131-2		
Air humidity (transport)	10% to 95%, non-condensing as per DIN EN 61131-2		
Air pressure (operation)	≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2		
Air pressure (storage)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2		
Air pressure (transport)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2		
Pollution severity	2		
Rail	TS 35		
Restricted area	Positive expansion	X coordinate	83.5 mm
		Z coordinate	85 mm
		Y coordinate	160 mm
	Type of restricted area	thermal	
	Negative expansion	Z coordinate	0 mm
		Y coordinate	-40 mm
		X coordinate	-28 mm
Shock	15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27		
Surge voltage category	II		
Test voltage	500 V		
UL 94 flammability rating	V-0		
Vibration resistance	5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6		

Power supply

Current consumption from I _N (power segment of the field bus coupler), typ.	100 mA
--	--------

Creation date March 23, 2021 4:32:29 PM CET

UR20-FBC-PB-DP**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Current consumption from I_{IN} (power segment of the fieldbus coupler), typ.	min.	100 mA
	nominal	100 mA
	max.	100 mA
Feed current for I_{IN} (input current path)	max.	10,000 mA
	nominal	10,000 mA
	min.	10,000 mA
Feed current for I_{IN} (input current path) , max.	10 A	
Feed current for I_{OUT} (output current path)	nominal	10,000 mA
	min.	10,000 mA
	max.	10,000 mA
Feed current for I_{OUT} (output current path) , max.	10 A	
Feed current for the system, max.	4 A	
Supply voltage for outputs	24 V DC +20 %/ -15 %	
Supply voltage system and inputs	24 V DC +20 %/ -15 %	
Voltage supply	24 V DC +20 %/ -15 %, via the system bus	

System data

Connection type	9-pole SUB-D socket (female)	Diagnostic data	244 Byte
Field bus protocol	PROFIBUS DP-V1	Galvanic isolation	Yes, between field and system bus
Interface	u-remote system bus	Module type	Bus coupler
Parameter data	244 Byte	Process data	488 Byte
Transmission rate of field bus, max.	12 Mbit/s	Transmission speed of system bus, max.	48 Mbit/s
max. number of modules	64 ST		

Classifications

ETIM 6.0	EC001603	ETIM 7.0	EC001603
ECLASS 9.0	27-24-26-07	ECLASS 9.1	27-24-26-07
ECLASS 10.0	27-24-26-07	ECLASS 11.0	27-24-26-07

UR20-FBC-PB-DP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Tender specification sheets

Long specification

Profibus DP-V1 field bus coupler with integrated Sub-D connection for digital and analogue signals. The field bus coupler recognises the installed modules and uses them to generate a process image. The module sequence is not relevant. The field bus coupler is integrated into an application as a Profibus I/O device. Corresponding GSD files are available from www.Weidmueller.de. Connection system: PUSH-IN terminal Field bus transmission rate: 12 Mbit Transmission rate of the u-remote system bus : 48 Mbit Bus interface: Sub-D Voltage supply: 24 VDC +25% / -15% Feed-in current for system: 4 A Feed-in current for input modules: 10 A Feed-in current for output modules: 10 A Internal current consumption: 100 mA Process data: 488 bytes Parameter data: 244 bytes Diagnostic data: 244 bytes Number of I/O points: Number of I/O stations: Number of modules: Max. 64 Protocol: Profibus DP-V1 Start-up aid: web server Configuration interface: USB Protection degree: IP20 Mounting position: horizontal, vertical with derating - see manual Efficiency of the power supply unit: Potential separation: between system path, input and output path Current via power contacts: 10 A on input and on output paths Storage temperature: -40°C - +85°C Operating temperature: -20°C - +60°C Relative humidity: 10% - 90%, non-condensing Weight: 220 g Dimensions (WxHxD): 52 mm x 120 mm x 76 mm Approvals: UL, Ex, Brand: Weidmüller Type: UR20-FBC-PB-DP

UR20-FBC-PB-DP

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	E141197

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity Lloyds Register certificate DNV/GL certificate ABS certificate RINA certificate Bureau Veritas - Type Approval Certificate PRS (Polish Register of Shipping) NIPPON KAIJI KYOKAI Certificate
Engineering Data	STEP Siemens - Step 7 Siemens - TIA Portal
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Product Change Notification	Release-Notes - GSD Release-Notes - Firmware and Supported modules list
Software	Language Pack UR20_FBC Current Firmware file PROFIBUS coupler Archiv Firmware files PROFIBUS coupler Archiv GSD files PROFIBUS coupler USB driver CPD-Tool (PROFIsafe parameter-checksum-generator) Current GSD file PROFIBUS V1 coupler
User Documentation	MAN_U-REMOTE_DE MAN_U-REMOTE_EN MAN_U-REMOTE_FS_DE MAN_U-REMOTE_FS_EN MAN_UR20_WEBSERVER_DE MAN_UR20_WEBSERVER_EN


UR20-FBC-PB-DP

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Block diagram

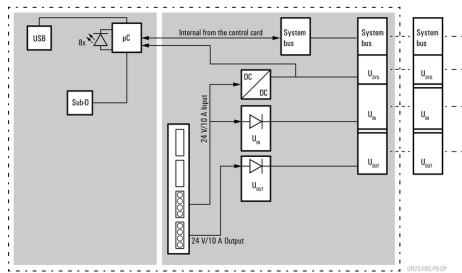

Connection diagram

