

SL RH4R OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com





No task is too small when creating the perfect solution. br/>

Connections form just one part of the overall process. Small details are often the key to the perfect solution in applications where potentials are tested, grouped or even isolated.

A system is not a system without small but useful details:

- Test plugs ensure reliable pick-up from diagnostic sockets
- Cross-connectors ensure a stable electrical distribution contact directly at the connection
- Compartment partition elements divide a large number of male connectors into several separate socket connector channels
- Locks and clips optional vibration-resistant clipon connection or mounting for male and female connectors

In tandem with the manufacturing process and application - more accessories = smaller workload

General ordering data

Version	PCB plug-in connector, Accessories, Latches,	
	orange, Number of poles: 1	
Order No.	<u>1338860000</u>	
Туре	SL RH4R OR	
GTIN (EAN) 4008190126681		
Qty.	100 pc(s).	
Product data		
Packaging	Вох	



SL RH4R OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany

www.weidmueller.com

Technical data

Dimensions	and	l weights
------------	-----	-----------

Net weight	0.4 a

Material data

Colour	orange	Colour chart (similar)	RAL 2000
Storage temperature, min.	-40 °C	Storage temperature, max.	70 °C
Operating temperature, min.	-50 °C	Operating temperature, max.	100 °C
Temperature range, installation, min.	-25 °C	Temperature range, installation, max.	100 °C

Rated data acc. to IEC

tested accito standard	IFC 60664-1 IFC 61984

Packing

Packaging	Box	VPE length	30 mm	
VPE width	75 mm	VPE height	80 mm	

Classifications

ETIM 6.0	EC002943	ETIM 7.0	EC002943
ECLASS 9.0	27-44-04-92	ECLASS 9.1	27-44-04-92
ECLASS 10.0	27-44-04-92	ECLASS 11.0	27-46-04-05

Important note

IPC conformity	Conformity: The products are developed, manufactured and delivered according international recognized
standards and norms and comply with the assured properties in the data sheet resp. fulfill decr	
	in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.
Notes	 Long term storage of the product with average temperature of 50 °C and average humidity 70%, 36 months

Approvals

Approvals



ROHS Conform


Downloads


Approval/Certificate/Document of Conformity


Declaration of the Manufacturer


SHOWN: ARPL BV/SV7.62HP/2AN


SHOWN: ARPL BV/SV7.62HP/4AN

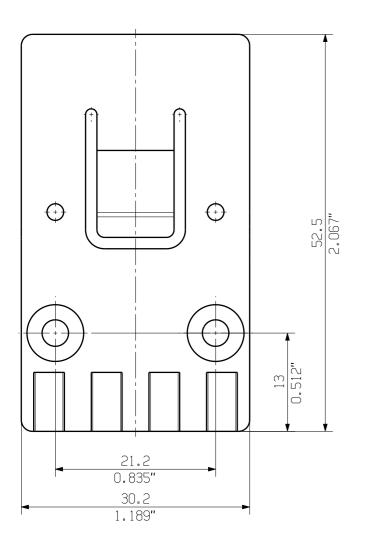

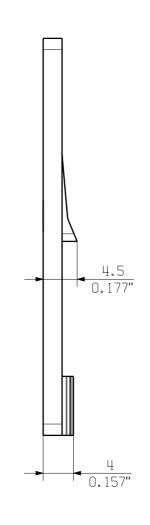


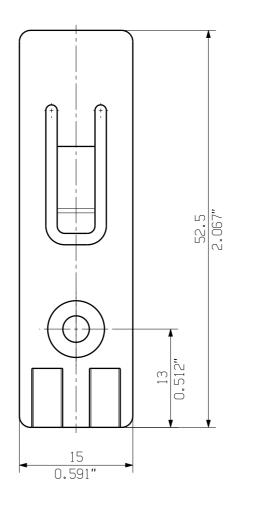

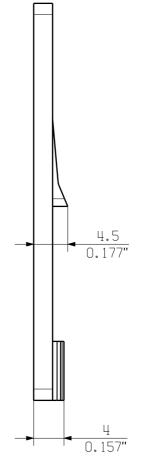

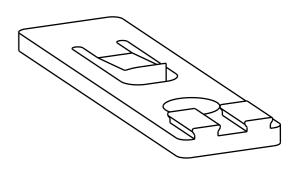

ARPL BV/SV7.62HP/2AN

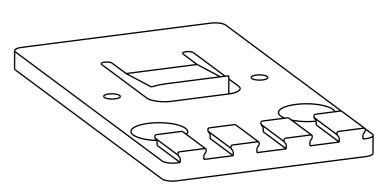

ARPL BV/SV7.62HP/4AN

PA 66/6 VO 30 GF GR	BV/SV7.62HP/4AN ARPL GR	1937580000
PA 66/6 VO 30 GF GR	BV/SV7.62HP/2AN ARPL GR	1937570000
WERKSTOFF MATERIAL	TYP PART NAME	BESTNR.
INIVITEITIVE	I I AILI NANL	UNI.NU.

