


PSSR 1PH CONTROL UNIT**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

- Monitoring of up to 5 consumers connected in parallel
- Monitoring of single failure and short-circuit
- Can be plugged into the single-phase PSSRs with heat sink
- Feedback output for error message
- Teach button on the module and external teach input
- Undercurrent switching threshold: $0.84 \times I_{teach}$

General ordering data

Version	Power Solid-State Relais, Current monitoring, Screw connection
Order No.	1406230000
Type	PSSR 1PH CONTROL UNIT
GTIN (EAN)	4050118206739
Qty.	1 pc(s).

PSSR 1PH CONTROL UNIT

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	65 mm	Depth (inches)	2.559 inch
Height	112.3 mm	Height (inches)	4.421 inch
Net weight	85 g	Width	25 mm
Width (inches)	0.984 inch		

Temperatures

Storage temperature	-40 °C...125 °C	Operating temperature	-40 °C...80 °C
Humidity	40...85 % (indoor) no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Supply

Voltage supply	8...30 V DC	Current consumption	≤ 20 mA (feedback output unloaded), ≤ 120 mA (switched feedback output max. loaded)
Protective circuit	Varistor, Reverse polarity protection		

Control side

Nominal control current (control input)	≤ 2.5 mA	Nominal control current (external teach input)	≤ 2.5 mA
Pull-in/drop-out voltage, typ.	2 V DC	Rated control voltage (control input)	4...30 V DC
Rated control voltage (external teach input)	4...30 V DC		

Control output to the PSSR

Solid-state type	Transistor	Nominal switching voltage	8...30 V DC
Switch-on delay	≤ 15 ms	Switch-off delay	≤ 16 ms

Feedback output

Solid-state type	MOS-FET	Nominal switching voltage	8...30 V DC
Continuous current	0.1 A	Switch-on delay	≤ 100 ms
Switch-off delay	≤ 100 ms		

Current monitoring

Undercurrent switching threshold	0.84 x I _{setting}	Leakage current in PSSR output, max.	0.3 A
----------------------------------	-----------------------------	--------------------------------------	-------

Current transformer

Current measurement range AC, max.	40 A	Current measurement range AC, min.	2 A
Current sensor hole diameter	9 mm		

General data

Colour	black
--------	-------

Creation date March 23, 2021 9:24:51 PM CET

PSSR 1PH CONTROL UNIT

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Insulation coordination

Pollution severity	2	Protection degree	IP20
Surge voltage category	III		

Further details of approvals / standards

Standards	EN 60947-4-3, EN 60950
-----------	------------------------

Connection data

Wire connection method	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.5 Nm	Clamping range, rated connection	1.5 mm ²
Clamping range, min.	0.15 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.2 mm ²	Wire connection cross section, finely stranded, max.	1.5 mm ²
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, finely stranded, max. (AWG)	AWG 12
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.2 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm ²
Blade size	0.6 x 3.5 mm		

Classifications

ETIM 6.0	EC001440	ETIM 7.0	EC001440
ECLASS 9.0	27-37-18-02	ECLASS 9.1	27-37-18-02
ECLASS 10.0	27-37-18-02	ECLASS 11.0	27-37-18-02

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD
User Documentation	User Documentation - Manual DE/EN


PSSR 1PH CONTROL UNIT

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Wiring diagram

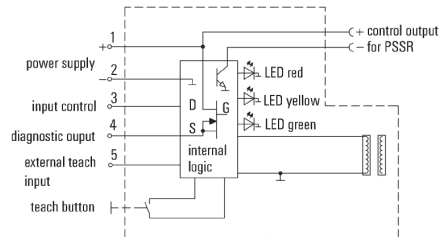

Dimensional drawing

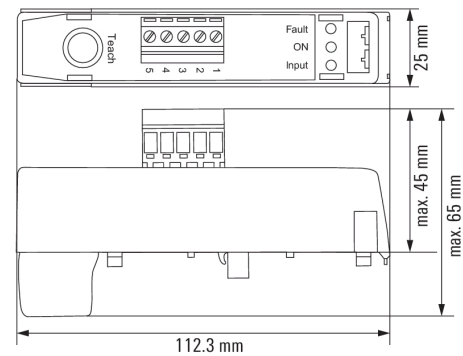


Example of use



Current monitoring module
mounted on a single-phase PSSR

Dimensional drawing

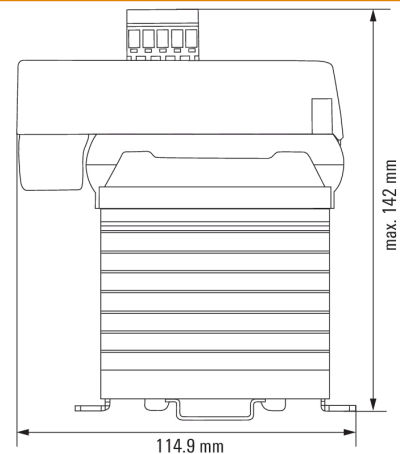

Dimensions of a current-monitoring
module mounted on a single-phase PSSR