



### Main

Range of product	Modicon Quantum automation platform
Product or component type	Analogue input module
Type of filter	Single pole low pass - 3 dB at 20 Hz Notch filter - 3 dB at 50/60 Hz

### Complementary

Analogue input number	8
Addressing requirement	10 input words
Analogue input type	Thermocouple - 50...1665 °C thermocouple S Thermocouple - 50...1665 °C thermocouple R Thermocouple - 270...400 °C thermocouple T Thermocouple - 270...1370 °C thermocouple K Thermocouple - 270...1000 °C thermocouple E Thermocouple - 210...760 °C thermocouple J
Analogue input resolution	16 bits
Input impedance	> 1 MOhm
Absolute accuracy error	+/- 4 °C plus + 0.1 % of reading thermocouple S +/- 4 °C plus + 0.1 % of reading thermocouple R +/- 2 °C plus + 0.1 % of reading thermocouple T +/- 2 °C plus + 0.1 % of reading thermocouple K +/- 2 °C plus + 0.1 % of reading thermocouple J +/- 2 °C plus + 0.1 % of reading thermocouple E
Linearity error	1 °C, 0.1 °C, 1 F, 0.1 F - 50...1665 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...400 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...1370 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 270...1000 °C 1 °C, 0.1 °C, 1 F, 0.1 F - 210...760 °C
Accuracy drift according to temperature	0.15 $\mu$ V/°C + 0.0015 % of reading/°C max low level voltage
Common mode rejection	>= 120 dB 50/60 Hz
Isolation between channels and bus	2500 V DC for 60 s 1780 V AC for 60 s
Isolation between channels	220 V AC 300 V DC
Update time	1000 ms
Fault type	Overtacking scale Broken wire
Marking	CE
Cold junction compensation	Internal 0...60 °C
Local signalling	8 LEDs red channel fault 8 LEDs green channel is turned on 1 LED red external fault 1 LED green bus communication is present (Active)
Bus current requirement	280 mA
Power dissipation in W	1.5 W

Module format	Standard
Product weight	0.3 kg

## Environment

Standards	CSA C22.2 No 142 UL 508
Product certifications	CUL FM Class 1 Division 2
Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available <a href="#">Download Product Environmental</a>
Product end of life instructions	Need no specific recycling operations

Racks for Modules Mounting


Dimensions of Modules and Racks



- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Thermocouple Input 8-Channel Module

Wiring Diagram

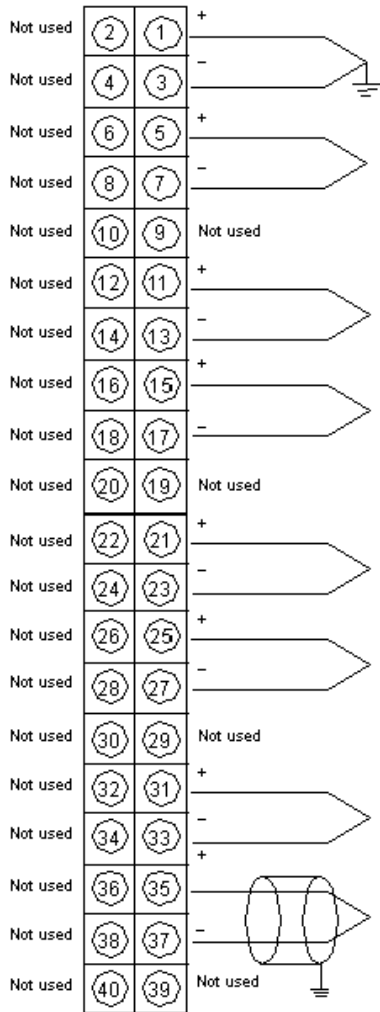

Using Cold Junction Compensation (CJC)

For temperature measurements, the module provides an internal CJC. However, a remote CJC can be used with the following TC types: J,K and T. The TC must be connected to Channel.

