



Main

Range of product	Modicon Quantum automation platform
Product or component type	Hot standby module
Software designation	ProWORX 32 NxT V2.0 Concept >= V2.0

Complementary

Product compatibility	All 140CPU43412A/534 with IEC language All legacy 140CPU with LL984 language
Input/Output type	800 Series Quantum Sy/Max (remote I/O only)
Transmission rate	10 Mbit/s
Transmission support medium	Fiber optic 3 m
Switching time	13...48 ms
Electrical connection	1 connector RJ45 for fiber optic transmitter 1 connector RJ45 for fiber optic receiver
Local signalling	1 LED red communication error 1 LED green ready module 1 LED green control process 1 LED green communication with I/O module 1 LED amber module in standby
Bus current requirement	700 mA
Module format	Standard
Product weight	1.06 kg


Environment

RFI immunity	27...1000 MHz 10 V/m conforming to IEC 60801-3
Protective treatment	Conformal coating Humiseal 1A33
Resistance to electrostatic discharge	8 kV air 4 kV contact
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Racks for Modules Mounting

Dimensions of Modules and Racks

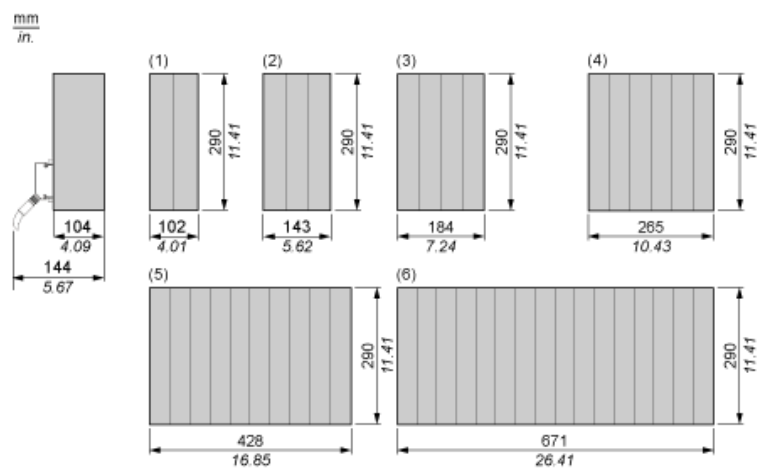

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots