



Main

Range of product	Modicon Quantum automation platform
Product or component type	Power supply module
Power supply type	Redundant

Complementary

Input voltage	24 V DC 20...30 V
Input current	<= 3800 mA
Inrush current	25 A 24 V 14 A 20 V
Input power interruption	1 ms 20 V <= 100 ms
Associated fuse rating	5 A slow-blow
Output voltage	5.1 V DC
Power supply output current	8 A redundant
Output overvoltage protection	Internal
Output overload protection	2.3 x maximum rated input voltage for 1.3 ms
Power dissipation	6 + (1.8 x I _{out}) where I _{out} is in A
Alarm output	1 NC 6 A 220 V power supply fault
Local signalling	1 LED green power (PWR OK)
Marking	CE
Module format	Standard
Product weight	0.65 kg

Environment


Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 UL 508
Product certifications	CUL FM Class 1 Division 2
Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0901 - Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold - go to CaP for more details
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations

Racks for Modules Mounting


Dimensions of Modules and Racks

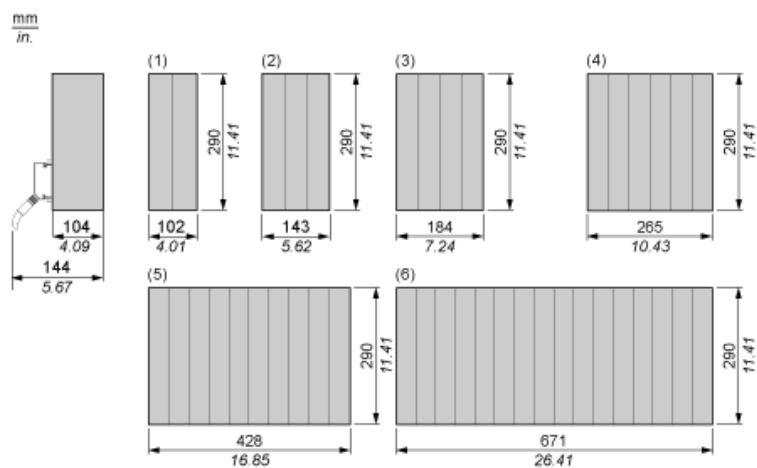

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24 Vdc/8 A Redundant Power Supply Module

Wiring Diagram and Hold-up Capacitor Timing Chart

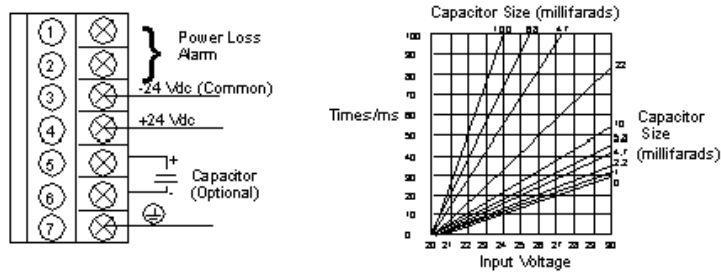

NOTE: A normally closed relay contact rated at 220 Vac, 6A / 30 Vdc, 5A is available on terminals 1 and 2 of the power terminal strip. This contact set may be used to signal input power OFF, or a power supply failure. The relay will de-energize when input power drops below 8 Vdc.