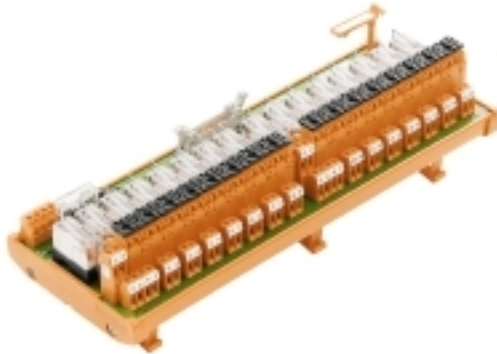


RSM16 1T/CDE-EV 24V-H/Z**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Digital output interface per-relay for electrical signal transmission between the PLC and the field.

- Electrical isolation by pluggable relays.
- Integrated LED status display.
- Screw or tension clamp-connection.
- Additional functions: in-series fuse or isolator
- 2 versions available: compact (RSS relay) or standard (RCL relay).

General ordering data

Version	Interface, RSM, 16 with fuse, RCL, Spring connection
Order No.	1417680000
Type	RSM16 1T/CDE-EV 24V-H/Z
GTIN (EAN)	4050118221213
Qty.	1 pc(s).

Creation date March 23, 2021 9:59:03 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RSM16 1T/CDE-EV 24V-H/Z

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight	970 g
------------	-------

General data

LED status display per relay	green	Fuse per relay	Yes
Switch	Yes (contacts side)	LED status of the supply voltage	yellow
Power supply fuse	3.15 A		

Connection data

Connection (field side)	LMNZF 5.08mm	Connection on control side	Plug-in connector in acc. with IEC60603-13 / DIN41651
Connection supply	LMNZF 5.08mm	Number of poles (control side)	20-pole plug

Rating data

Mechanical service life	3 x 10 ⁷ switching cycles
-------------------------	--------------------------------------

Ratings data input

Input voltage	24 V DC ± 10%	Input current	17 mA
Power rating	0.4 VA		

Ratings data output

Relay type	RCL	Type of output	Potential-free contact
Contact material	AgNi 90/10	Rated voltage (text)	≤ 250 Vdc ≤ 250 Vac
Max. AC continuous current	5 A	AC peak current	16 A

Insulation coordinates (EN50178)

According to	DIN EN 50178	Rated input insulation voltage	< 50 V AC
Rated output insulation voltage	< 250 V AC	Overvoltage category input/input	III
Overvoltage category input/output	III	Overvoltage category output/output	II
Pollution severity level	2	Pulse voltage test (1,2/50µs)	6 kV
Insulation test voltage	1.2 kVAC	Clearance input/output	≥ 5.5 mm
Clearance input/input	≥ 0.2 mm	Clearance output/output	≥ 1.17 mm

Connection field

Clamping range, max.	1.5 mm ²	Clamping range, min.	0.15 mm ²
Flexible with sleeve, max.	1.5 mm ²	Flexible, max. H05(07) V-K	1.5 mm ²
Flexible, min. H05(07) V-K	0.5 mm ²	Max. wire cross-section, AWG	AWG 14
Min. wire cross-section, AWG	AWG 26	Solid, max. H05(07) V-U	1.5 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	7 mm
Type of connection	Spring connection		

RSM16 1T/CDE-EV 24V-H/Z**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Supply connection**

Type of connection	Spring connection	Clamping range, min.	0.15 mm ²
Clamping range, max.	1.5 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	1.5 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²	Flexible with sleeve, max.	1.5 mm ²
Wire cross-section, min. AWG	AWG 26	Wire cross-section, max. AWG	AWG 14
Stripping length	7 mm		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ECLASS 9.0	27-14-11-52	ECLASS 9.1	27-24-22-16
ECLASS 10.0	27-14-11-52	ECLASS 11.0	27-14-11-52

Approvals

Approvals



ROHS

Conform

RSM16 1T/CDE-EV 24V-H/Z

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

